

# LEE COUNTY SURVEY MARK DESCRIPTION



SURVEY CONTROL BY:  
DENI ASSOCIATES, INC.  
FORT MYERS, FLORIDA

MAPPING BY:  
WOOLPERT CONSULTANTS

DESIGNATION GPS-USCEGS PINELAND AZIMUTH <sup>(GPS 9059)</sup> COUNTY LEE STATE FL  
 LOCATED IN SEC 33 TWP 44S RGE 22E USGS QUAD MAP PINE ISLAND CENTER  
 TO REACH SURVEY MARK FROM THE INTERSECTION OF PINE ISLAND ROAD (CR 78)  
& H. STRINGFELLOW RD ; GO SOUTH 0.7 MI± ON STRINGFELLOW  
RD

TYPE OF 3 1/2" DIAMETER BRASS DISK SET IN 10" x 10" CONCRETE PAD ; "USCEGS  
 MARK 1954" - EXISTING DATE SET <sup>GPS</sup> 1990


HORIZONTAL CONTROL ORIGINATED ON 1st ORDER  
 CONTROL BASED ON FLORIDA HIGH PRECISION GPS NETWORK,  
 ON NORTH AMERICAN DATUM OF 1983, 1990 ADJUSTMENT  
 COORDINATES (FT), 1st ORDER  
 NORTHING (Y) 824,930.207  
 EASTING (X) 618,752.909

HORIZONTAL CONTROL ORIGINATED ON \_\_\_\_\_ ORDER  
 CONTROL BY \_\_\_\_\_  
 ON \_\_\_\_\_ DATUM  
 COORDINATES (FT), \_\_\_\_\_ ORDER  
 NORTHING (Y) \_\_\_\_\_  
 EASTING (X) \_\_\_\_\_

GRID FLORIDA TRANSVERSE MERCATOR  
 ZONE WEST SCALE FACTOR .999943  
 FIELD BOOK \_\_\_\_\_ PAGE \_\_\_\_\_

RECOVERED BY DENI ASSOCIATES  
 DATE, CONDITION 2-91  
GOOD

- RECOVERY TIES
- NO. 1 25.0 FT. TO EDGE OF PAVEMENT
  - NO. 2 1.2 FT. TO WITNESS POST
  - NO. 3 133.4 FT. TO POLE

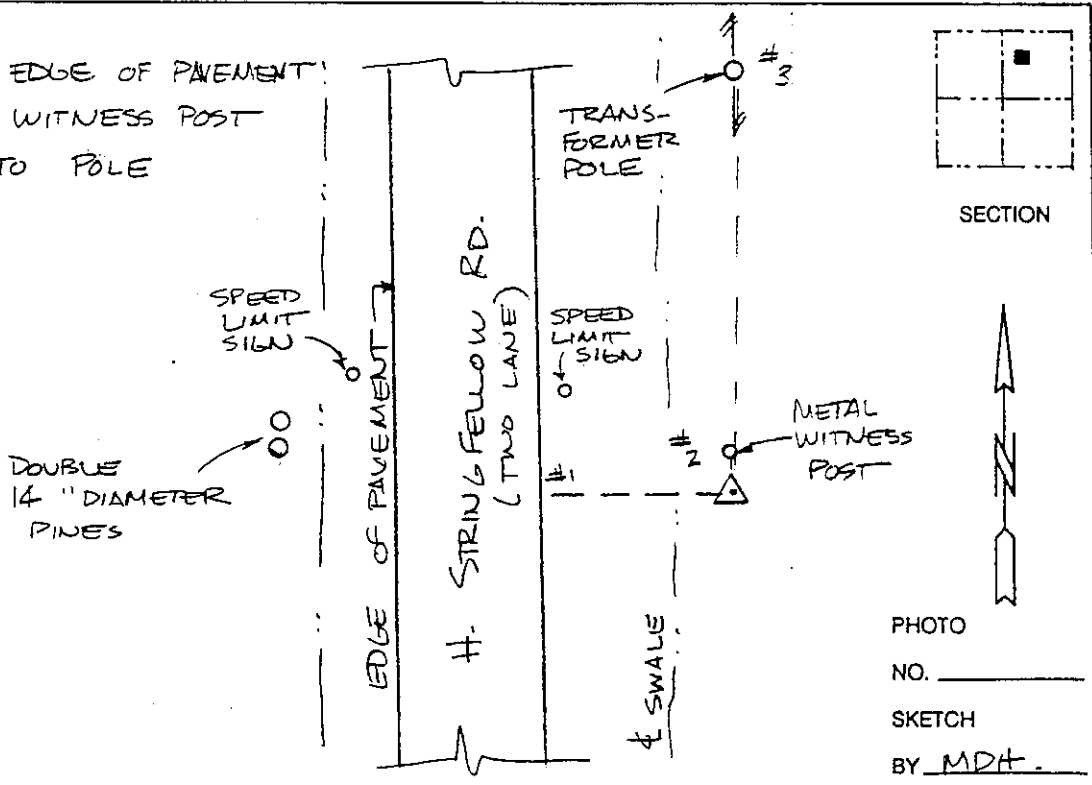

VERTICAL CONTROL ORIGINATED ON 2nd ORDER CONTROL ESTABLISHED BY N. G. S. AND F. D. O. T.  
 ON NATIONAL GEODETIC VERTICAL DATUM OF 1929.  
 ELEVATION (FT) \_\_\_\_\_, 3rd ORDER LEVEL BOOK \_\_\_\_\_ PAGE \_\_\_\_\_

PHOTO NO. \_\_\_\_\_  
 SKETCH BY MDH.