

RES2003-
08595

FEDERAL EMERGENCY MANAGEMENT AGENCY
NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077
Expires December 31, 2005

ELEVATION CERTIFICATE

Important: Read the instructions on pages 1-7.

BWLK# 34424		SECTION A - PROPERTY OWNER INFORMATION		For Insurance Company Use:	
BUILDING OWNER'S NAME FRANK AND CAROLYN ANTONOVITZ				Policy Number	
BUILDING STREET ADDRESS (Including Apt., Unit, Suite, and/or Bldg. No.) OR P.O. ROUTE AND BOX NO. 15656 CALOOSA CREEK CIRCLE				Company NAIC Number	
CITY FORT MYERS		STATE FL		ZIP CODE 33908	
PROPERTY DESCRIPTION (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.) 35-45-23-13-00000.0790					
BUILDING USE (e.g., Residential, Non-residential, Addition, Accessory, etc. Use a Comments area, if necessary.) RESIDENTIAL					
LATITUDE/LONGITUDE (OPTIONAL) (##° -##' -###" or ###.####")		HORIZONTAL DATUM: <input type="checkbox"/> NAD 1927 <input type="checkbox"/> NAD 1983		SOURCE: <input type="checkbox"/> GPS (Type): <input type="checkbox"/> USGS Quad Map <input type="checkbox"/> Other: _____	

SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION

B1. NFIP COMMUNITY NAME & COMMUNITY NUMBER LEE COUNTY UNINCORPORATED 125124		B2. COUNTY NAME LEE		B3. STATE FLORIDA	
B4. MAP AND PANEL NUMBER 1251240325	B5. SUFFIX C	B6. FIRM INDEX DATE 05-05-03	B7. FIRM PANEL EFFECTIVE/REVISED DATE 11-04-92	B8. FLOOD ZONE(S) A-10	B9. BASE FLOOD ELEVATION(S) (Zone AO, use depth of flooding) +9.0'

B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in B9.

☐ FIS Profile ☐ FIRM ☐ Community Determined ☐ Other (Describe): _____

B11. Indicate the elevation datum used for the BFE in B9: ☒ NGVD 1929 ☐ NAVD 1988 ☐ Other (Describe): _____

B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? ☐ Yes ☐ No Designation Date _____

SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED)

C1. Building elevations are based on: ☐ Construction Drawings* ☐ Building Under Construction* ☒ Finished Construction

*A new Elevation Certificate will be required when construction of the building is complete.

C2. Building Diagram Number **1** (Select the building diagram most similar to the building for which this certificate is being completed - see pages 6 and 7. If no diagram accurately represents the building, provide a sketch or photograph.)


C3. Elevations - Zones A1-A30, AE, AH, A (with BFE), VE, V1-V30, V (with BFE), AR, AR/A, AR/AE, AR/A1-A30, AR/AH, AR/AO

Complete Items C3.-a-i below according to the building diagram specified in Item C2. State the datum used. If the datum is different from the datum used for the BFE in Section B, convert the datum to that used for the BFE. Show field measurements and datum conversion calculation. Use the space provided or the Comments area of Section D or Section G, as appropriate, to document the datum conversion.

Datum **1929** Conversion/Comments **Not Needed/Datum Same as FIRM**

Elevation reference mark used **U.S.C.&G.S. H-240** Does the elevation reference mark used appear on the FIRM? ☐ Yes ☒ No

- | | |
|--|-------------------|
| <input checked="" type="checkbox"/> a) Top of bottom floor (including basement or enclosure) | +9.1 ft |
| <input type="checkbox"/> b) Top of next higher floor | N/A. ft(m) |
| <input type="checkbox"/> c) Bottom of lowest horizontal structural member (V zones only) | N/A. ft(m) |
| <input checked="" type="checkbox"/> d) Attached garage (top of slab) | +7.3 ft |
| <input checked="" type="checkbox"/> e) Lowest elevation of machinery and/or equipment servicing the building (Describe in a Comments area) | +9.0 ft |
| <input checked="" type="checkbox"/> f) Lowest adjacent (finished) grade (LAG) | +6.4 ft |
| <input checked="" type="checkbox"/> g) Highest adjacent (finished) grade (HAG) | +6.7 ft |
| <input checked="" type="checkbox"/> h) No. of permanent openings (flood vents) within 1 ft. above adjacent grade 5 | |
| <input checked="" type="checkbox"/> i) Total area of all permanent openings (flood vents) in C3.h 177 sq. in. | |

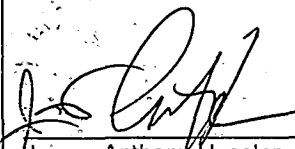License Number, Embossed Seal, Signature, and Date	Bean, Whitaker, Lutz & Kareh, Inc.
	
	James Anthony Hessler PLS 6410 Date: 4-15-2004

SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION

This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information.

I certify that the information in Sections A, B, and C on this certificate represents my best efforts to interpret the data available.

I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME **JAMES ANTHONY HESSLER**

LICENSE NUMBER **6410**

TITLE **LAND SURVEYOR**

COMPANY NAME **Bean, Whitaker, Lutz & Kareh**

ADDRESS

13041 McGregor Blvd

SIGNATURE

CITY

Fort Myers

DATE

4-15-2004

STATE

Florida

TELEPHONE

(239)481-1331 (239)481-1073 FAX

ZIP CODE

33919

IMPORTANT: In these spaces, copy the corresponding information from Section A.			For Insurance Company Use:
BUILDING STREET ADDRESS (Including Apt., Unit, Suite, and/or Bldg. No.) OR P.O. ROUTE AND BOX NO. 15656 CALOOSA CREEK CIRCLE			Policy Number
CITY FORT MYERS	STATE FL	ZIP CODE 33908	Company NAIC Number

SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION (CONTINUED)

Copy both sides of this Elevation Certificate for (1) community official, (2) insurance agent/company, and (3) building owner.

COMMENTS

C3. e) Refers to an elevated air conditioner platform.

☐ Check here if attachments

SECTION E - BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)

For Zone AO and Zone A (without BFE), complete Items E1 through E4. If the Elevation Certificate is intended for use as supporting information for a LOMA or LOMR-F, Section C must be completed.

E1. Building Diagram Number __ (Select the building diagram most similar to the building for which this certificate is being completed – see pages 6 and 7. If no diagram accurately represents the building, provide a sketch or photograph.)

E2. The top of the bottom floor (including basement or enclosure) of the building is __ ft.(m) __ in.(cm) ☐ above or ☐ below (check one) the highest adjacent grade. (Use natural grade, if available).

E3. For Building Diagrams 6-8 with openings (see page 7), the next higher floor or elevated floor (elevation b) of the building is __ ft.(m) __ in.(cm) above the highest adjacent grade. Complete items C3.h and C3.i on front of form.

E4. The top of the platform of machinery and/or equipment servicing the building is __ ft.(m) __ in.(cm) ☐ above or ☐ below (check one) the highest adjacent grade. (Use natural grade, if available).

E5. For Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain management ordinance?

☐ Yes ☐ No ☐ Unknown. The local official must certify this information in Section G.

SECTION F - PROPERTY OWNER (OR OWNER'S REPRESENTATIVE) CERTIFICATION

The property owner or owner's authorized representative who completes Sections A, B, C (Items C3.h and C3.i only), and E for Zone A (without a FEMA-issued or community-issued BFE) or Zone AO must sign here. *The statements in Sections A, B, C, and E are correct to the best of my knowledge.*

PROPERTY OWNER'S OR OWNER'S AUTHORIZED REPRESENTATIVE'S NAME

ADDRESS CITY STATE ZIP CODE

SIGNATURE DATE TELEPHONE

COMMENTS

☐ Check here if attachments

SECTION G - COMMUNITY INFORMATION (OPTIONAL)

The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below.

G1. ☐ The information in Section C was taken from other documentation that has been signed and embossed by a licensed surveyor, engineer, or architect who is authorized by state or local law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)

G2. ☐ A community official completed Section E for a building located in Zone A (without a FEMA-issued or community-issued BFE) or Zone AO.

G3. ☐ The following information (Items G4-G9) is provided for community floodplain management purposes.

G4. PERMIT NUMBER	G5. DATE PERMIT ISSUED	G6. DATE CERTIFICATE OF COMPLIANCE/OCCUPANCY ISSUED
-------------------	------------------------	---

G7. This permit has been issued for: ☐ New Construction ☐ Substantial Improvement

G8. Elevation of as-built lowest floor (including basement) of the building is: _____ ft.(m) Datum: _____

G9. BFE or (in Zone AO) depth of flooding at the building site is: _____ ft.(m) Datum: _____

LOCAL OFFICIAL'S NAME TITLE

COMMUNITY NAME TELEPHONE

SIGNATURE DATE

COMMENTS

☐ Check here if attachments



IMPACT LETTER

FOR THE PURPOSE OF POTENTIAL REFUND OF IMPACT FEES FOR:

STRAP# 35-45-23-13-00000.0790.

BUILDING PERMIT # _____

REFUND SHOULD BE ASSIGNED TO:

NAME OF INDIVIDUAL OR COMPANY Daniel Wayne Homes, Inc.

STREET ADDRESS 12860 Banyan Creek Drive

CITY Fort Myers, STATE FL ZIP 33908

SOCIAL SECURITY NUMBER (if individual) _____

EMPLOYEE FEDERAL I.D. NO. (if company) 65-0376444

I CERTIFY THAT THE ABOVE INFORMATION IS TRUE AND CORRECT

THIS FORM WAS PREPARED AND SUBMITTED BY

NAME Chasity Stafford SIGNATURE Chasity Stafford

FOR OFFICE USE ONLY

IMPACT FEE TYPE _____

TOTAL IMPACT FEE \$ _____

PAID BY: _____

I.D.# _____



ALPHA ENGINEERING

Consulting Civil Engineers • Site Development
Land Planning • Structural Engineering

DATE: September 12, 2003

CERT. # AEM: 2493-30

DEEMED TO COMPLY
LETTER OF CERTIFICATION

BUILDER: DANIEL WAYNE HOMES

RESIDENCE LOCATION: 15656 CALOOSA CREEK CIRCLE
LOT 79, CALOOSA CREEK
FT. MYERS, FL 33908

OWNER NAME: MR. & MRS. FRANK ANTONOVITZ

As Engineer of record, I hereby certify that the design for this new construction complies with Section 1606 and structural requirements as specified in the 2001 Florida Building Code for a 130 MPH wind zone and gravity loads.

CHINO II MODEL

THIS CERTIFICATION PACKAGE CONSISTS OF THE FOLLOWING DOCUMENTS:

Wind Importance Factor: 1.0
Building Category: II
Wind Exposure: B
Internal Pressure Coef. +/- 0.18

Constructed w/ STORM PANELS


BUILDER

ALPHA ENGINEERING, INC.

SITE PLAN
ELEVATION (2)
FOUNDATION
FLOOR PLAN
ELECTRICAL PLAN
DETAILS & SECTIONS

S1. Concrete & Reinforcement Details
S2. Roof Fastener / Additional Details

ALPHA ENGINEERING OF LEE COUNTY, INC.

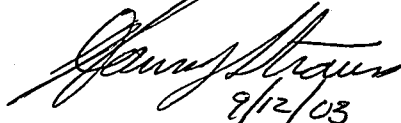
9/12/03

Harvey Strauss, P.E.
President

FLORIDA REG. # 18799

FLORIDA ENERGY EFFICIENCY CODE FOR BUILDING CONSTRUCTION

Florida Department of Community Affairs
Residential Whole Building Performance Method A

Project Name:	Antonovitz Residence	Builder:	Daniel Wayne Homes, Inc.
Address:	15656 Caloosa Creek Circle	Permitting Office:	Lee County
City, State:	Ft. Myers, FL	Permit Number:	
Owner:	M & M Frank Antonovitz	Jurisdiction Number:	461000
Climate Zone:	South		

1. New construction or existing	New	12. Cooling systems	
2. Single family or multi-family	Single family	a. Central Unit	Cap: 42.0 kBtu/hr
3. Number of units, if multi-family	1		SEER: 10.00
4. Number of Bedrooms	3	b. N/A	
5. Is this a worst case?	No	c. N/A	
6. Conditioned floor area (ft ²)	2395 ft ²	13. Heating systems	
7. Glass area & type	Single Pane Double Pane	a. Electric Strip	Cap: 34.1 kBtu/hr
a. Clear glass, default U-factor	0.0 ft ² 0.0 ft ²		COP: 1.00
b. Default tint	340.0 ft ² 0.0 ft ²	b. N/A	
c. Labeled U or SHGC	0.0 ft ² 0.0 ft ²	c. N/A	
8. Floor types		14. Hot water systems	
a. Slab-On-Grade Edge Insulation	R=0.0, 254.0(p) ft	a. Electric Resistance	Cap: 50.0 gallons
b. N/A			EF: 0.86
c. N/A		b. N/A	
9. Wall types		c. Conservation credits	
a. Frame, Wood, Exterior	R=19.0, 1814.0 ft ²	(HR-Heat recovery, Solar	
b. Frame, Wood, Adjacent	R=11.0, 144.0 ft ²	DHP-Dedicated heat pump)	
c. N/A		15. HVAC credits	
d. N/A		(CF-Ceiling fan, CV-Cross ventilation,	
e. N/A		HF-Whole house fan,	
10. Ceiling types		PT-Programmable Thermostat,	
a. Under Attic	R=19.0, 168.0 ft ²	MZ-C-Multizone cooling,	
b. Under Attic	R=30.0, 2430.0 ft ²	MZ-H-Multizone heating)	
c. N/A			
11. Ducts			
a. Sup: Unc. Ret: Unc. AH: Garage	Sup. R=6.0, 330.0 ft		
b. N/A			

Glass/Floor Area: 0.14 Total as-built points: 36189
Total base points: 36488

PASS

I hereby certify that the plans and specifications covered by this calculation are in compliance with the Florida Energy Code.

PREPARED BY: NRG-Calc 549-2008

DATE: 8/24/03

I hereby certify that this building, as designed, is in compliance with the Florida Energy Code.

OWNER/AGENT: [Signature]

DATE: 9/2/03

Review of the plans and specifications covered by this calculation indicates compliance with the Florida Energy Code. Before construction is completed this building will be inspected for compliance with Section 553.908 Florida Statutes.



BUILDING OFFICIAL: _____

DATE: _____

SUMMER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: 15656 Caloosa Creek Circle, Ft. Myers, FL,

PERMIT #:

BASE				AS-BUILT							
GLASS TYPES .18 X Conditioned X BSPM = Points Floor Area				Type/SC	Overhang Ornt Len Hgt		Area X SPM X SOF = Points				
.18	2395.0	32.50	14010.8	Single, Tint	N	8.0	4.5	20.0	29.33	0.64	377.8
				Single, Tint	N	13.8	8.5	7.0	29.33	0.66	134.6
				Single, Tint	N	13.8	10.5	13.5	29.33	0.68	269.9
				Single, Tint	N	13.8	4.3	5.5	29.33	0.61	97.8
				Single, Tint	N	8.0	6.7	32.0	29.33	0.69	648.3
				Single, Tint	N	2.0	5.7	13.0	29.33	0.89	341.1
				Single, Tint	W	2.0	4.0	7.0	58.39	0.75	306.4
				Single, Tint	W	45.5	6.7	23.0	58.39	0.40	543.1
				Single, Tint	S	2.0	6.7	48.0	55.34	0.83	2193.7
				Single, Tint	S	16.5	6.7	32.0	55.34	0.44	770.4
				Single, Tint	S	16.5	7.3	40.0	55.34	0.44	976.2
				Single, Tint	S	16.5	1.0	10.5	55.34	0.43	248.7
				Single, Tint	E	46.5	7.3	20.0	65.40	0.36	473.2
				Single, Tint	E	46.5	1.0	5.5	65.40	0.36	130.1
				Single, Tint	E	2.0	6.7	27.5	65.40	0.88	1585.8
				Single, Tint	E	2.0	2.7	2.5	65.40	0.61	99.7
				Single, Tint	NW	15.0	4.5	10.0	39.52	0.55	215.5
				Single, Tint	S	9.5	6.7	23.0	55.34	0.48	605.7
				As-Built Total:				340.0	10017.8		
WALL TYPES Area X BSPM = Points				Type	R-Value		Area X SPM = Points				
Adjacent	144.0	1.00	144.0	Frame, Wood, Exterior	19.0		1814.0	1.60	2902.4		
Exterior	1814.0	2.70	4897.8	Frame, Wood, Adjacent	11.0		144.0	1.00	144.0		
Base Total:		1958.0	5041.8	As-Built Total:				1958.0	3046.4		
DOOR TYPES Area X BSPM = Points				Type			Area X SPM = Points				
Adjacent	18.0	2.60	46.8	Exterior Insulated			48.0	6.40	307.2		
Exterior	61.0	6.40	390.4	Exterior Insulated			13.0	6.40	83.2		
				Adjacent Wood			18.0	3.80	68.4		
Base Total:		79.0	437.2	As-Built Total:				79.0	458.8		
CEILING TYPES Area X BSPM = Points				Type	R-Value		Area X SPM X SCM = Points				
Under Attic	2395.0	2.80	6706.0	Under Attic	19.0		168.0	3.72 X 1.00	625.0		
				Under Attic	30.0		2430.0	2.77 X 1.00	6731.1		
Base Total:		2395.0	6706.0	As-Built Total:				2598.0	7356.1		

SUMMER CALCULATIONS**Residential Whole Building Performance Method A - Details**ADDRESS: **15656 Caloosa Creek Circle, Ft. Myers, FL,**

PERMIT #:

BASE				AS-BUILT					
FLOOR TYPES Area X BSPM = Points				Type	R-Value	Area X SPM = Points			
Slab	254.0(p)	-20.0	-5080.0	Slab-On-Grade Edge Insulation	0.0	254.0(p)	-20.00	-5080.0	
Raised	0.0	0.00	0.0						
Base Total: -5080.0				As-Built Total:		254.0	-5080.0		
INFILTRATION Area X BSPM = Points				Area X SPM = Points					
2395.0 18.79 45002.0				2395.0 18.79 45002.0					
Summer Base Points: 66117.8				Summer As-Built Points: 60801.1					
Total Summer X System = Cooling Points Multiplier Points				Total X Cap X Duct X System X Credit = Cooling Component Ratio Multiplier Multiplier Multiplier Points (DM x DSM x AHU)					
66117.8	0.4266	28205.9		60801.1	1.000	(1.073 x 1.165 x 1.00)	0.341	1.000	25917.4
				60801.1	1.00	1.250	0.341	1.000	25917.4

WINTER CALCULATIONS**Residential Whole Building Performance Method A - Details**

ADDRESS: 15656 Caloosa Creek Circle, Ft. Myers, FL,

PERMIT #:

BASE				AS-BUILT							
GLASS TYPES .18 X Conditioned X BWPM = Points Floor Area				Type/SC	Overhang Ornt Len Hgt			Area X WPM X WOF = Points			
.18	2395.0	2.36	1017.4	Single, Tint	N	8.0	4.5	20.0	6.11	0.95	116.7
				Single, Tint	N	13.8	8.5	7.0	6.11	0.96	40.9
				Single, Tint	N	13.8	10.5	13.5	6.11	0.96	79.3
				Single, Tint	N	13.8	4.3	5.5	6.11	0.95	31.9
				Single, Tint	N	8.0	6.7	32.0	6.11	0.96	188.2
				Single, Tint	N	2.0	5.7	13.0	6.11	0.99	78.4
				Single, Tint	W	2.0	4.0	7.0	5.65	1.01	39.8
				Single, Tint	W	45.5	6.7	23.0	5.65	1.03	134.0
				Single, Tint	S	2.0	6.7	48.0	4.79	1.04	238.4
				Single, Tint	S	16.5	6.7	32.0	4.79	1.44	220.7
				Single, Tint	S	16.5	7.3	40.0	4.79	1.43	275.1
				Single, Tint	S	16.5	1.0	10.5	4.79	1.44	72.7
				Single, Tint	E	46.5	7.3	20.0	5.05	1.29	130.5
				Single, Tint	E	46.5	1.0	5.5	5.05	1.29	35.9
				Single, Tint	E	2.0	6.7	27.5	5.05	1.03	142.6
				Single, Tint	E	2.0	2.7	2.5	5.05	1.08	13.6
				Single, Tint	NW	15.0	4.5	10.0	6.09	0.95	57.9
				Single, Tint	S	9.5	6.7	23.0	4.79	1.40	154.1
				As-Built Total:				340.0		2050.7	
WALL TYPES Area X BWPM = Points				Type	R-Value			Area X WPM = Points			
Adjacent	144.0	0.50	72.0	Frame, Wood, Exterior	19.0			1814.0	0.30	544.2	
Exterior	1814.0	0.60	1088.4	Frame, Wood, Adjacent	11.0			144.0	0.50	72.0	
Base Total:		1958.0	1160.4	As-Built Total:				1958.0		616.2	
DOOR TYPES Area X BWPM = Points				Type				Area X WPM = Points			
Adjacent	18.0	1.30	23.4	Exterior Insulated				48.0	1.80	86.4	
Exterior	61.0	1.80	109.8	Exterior Insulated				13.0	1.80	23.4	
				Adjacent Wood				18.0	1.90	34.2	
Base Total:		79.0	133.2	As-Built Total:				79.0		144.0	
CEILING TYPESArea X BWPM = Points				Type	R-Value			Area X WPM X WCM = Points			
Under Attic	2395.0	0.10	239.5	Under Attic	19.0			168.0	0.14 X 1.00	23.5	
				Under Attic	30.0			2430.0	0.10 X 1.00	243.0	
Base Total:		2395.0	239.5	As-Built Total:				2598.0		266.5	

WINTER CALCULATIONS**Residential Whole Building Performance Method A - Details**ADDRESS: **15656 Caloosa Creek Circle, Ft. Myers, FL,**

PERMIT #:

BASE				AS-BUILT			
FLOOR TYPES Area X BWPM = Points				Type	R-Value	Area X WPM	= Points
Slab	254.0(p)	-2.1	-533.4	Slab-On-Grade Edge Insulation	0.0	254.0(p)	-533.4
Raised	0.0	0.00	0.0				
Base Total:			-533.4	As-Built Total:			-533.4
INFILTRATION Area X BWPM = Points				Area X WPM = Points			
			2395.0				-143.7
			-0.06				-143.7
Winter Base Points:			1873.4	Winter As-Built Points:			2400.3
Total Winter Points	X System Multiplier	= Heating Points		Total Component	X Cap Ratio	X Duct Multiplier (DM x DSM x AHU)	X System Multiplier X Credit Multiplier = Heating Points
1873.4	0.6274	1175.4		2400.3	1.00	(1.099 x 1.137 x 1.00)	1.000 1.000 2999.4
				2400.3	1.00	1.250	1.000 1.000 2999.4

WATER HEATING & CODE COMPLIANCE STATUS**Residential Whole Building Performance Method A - Details**ADDRESS: **15656 Caloosa Creek Circle, Ft. Myers, FL,**

PERMIT #:

BASE					AS-BUILT					
WATER HEATING					Tank	EF	Number of	X	Tank X	Multiplier X Credit = Total
Number of	X	Multiplier	=	Total	Volume		Bedrooms		Ratio	Multiplier
Bedrooms										
3		2369.00		7107.0	50.0	0.86	3		1.00	2424.09 1.00 7272.3
					As-Built Total:					7272.3

CODE COMPLIANCE STATUS											
BASE						AS-BUILT					
Cooling Points	+	Heating Points	+	Hot Water Points	= Total Points	Cooling Points	+	Heating Points	+	Hot Water Points	= Total Points
28206		1175		7107	36488	25917		2999		7272	36189

PASS

Code Compliance Checklist

Residential Whole Building Performance Method A - Details

ADDRESS: 15656 Caloosa Creek Circle, Ft. Myers, FL,

PERMIT #:

6A-21 INFILTRATION REDUCTION COMPLIANCE CHECKLIST

COMPONENTS	SECTION	REQUIREMENTS FOR EACH PRACTICE	CHECK
Exterior Windows & Doors	606.1.ABC.1.1	Maximum: .3 cfm/sq.ft. window area; .5 cfm/sq.ft. door area.	
Exterior & Adjacent Walls	606.1.ABC.1.2.1	Caulk, gasket, weatherstrip or seal between: windows/doors & frames, surrounding wall; foundation & wall sole or sill plate; joints between exterior wall panels at corners; utility penetrations; between wall panels & top/bottom plates; between walls and floor. EXCEPTION: Frame walls where a continuous infiltration barrier is installed that extends from, and is sealed to, the foundation to the top plate.	
Floors	606.1.ABC.1.2.2	Penetrations/openings >1/8" sealed unless backed by truss or joint members. EXCEPTION: Frame floors where a continuous infiltration barrier is installed that is sealed to the perimeter, penetrations and seams.	
Ceilings	606.1.ABC.1.2.3	Between walls & ceilings; penetrations of ceiling plane of top floor; around shafts, chases, soffits, chimneys, cabinets sealed to continuous air barrier; gaps in gyp board & top plate; attic access. EXCEPTION: Frame ceilings where a continuous infiltration barrier is installed that is sealed at the perimeter, at penetrations and seams.	
Recessed Lighting Fixtures	606.1.ABC.1.2.4	Type IC rated with no penetrations, sealed; or Type IC or non-IC rated, installed inside a sealed box with 1/2" clearance & 3" from insulation; or Type IC rated with < 2.0 cfm from conditioned space, tested.	
Multi-story Houses	606.1.ABC.1.2.5	Air barrier on perimeter of floor cavity between floors.	
Additional Infiltration reqts	606.1.ABC.1.3	Exhaust fans vented to outdoors, dampers; combustion space heaters comply with NFPA, have combustion air.	

6A-22 OTHER PRESCRIPTIVE MEASURES (must be met or exceeded by all residences.)

COMPONENTS	SECTION	REQUIREMENTS	CHECK
Water Heaters	612.1	Comply with efficiency requirements in Table 6-12. Switch or clearly marked circuit breaker (electric) or cutoff (gas) must be provided. External or built-in heat trap required.	
Swimming Pools & Spas	612.1	Spas & heated pools must have covers (except solar heated). Non-commercial pools must have a pump timer. Gas spa & pool heaters must have a minimum thermal efficiency of 78%.	
Shower heads	612.1	Water flow must be restricted to no more than 2.5 gallons per minute at 80 PSIG.	
Air Distribution Systems	610.1	All ducts, fittings, mechanical equipment and plenum chambers shall be mechanically attached, sealed, insulated, and installed in accordance with the criteria of Section 610. Ducts in unconditioned attics: R-6 min. insulation.	
HVAC Controls	607.1	Separate readily accessible manual or automatic thermostat for each system.	
Insulation	604.1, 602.1	Ceilings-Min. R-19. Common walls-Frame R-11 or CBS R-3 both sides. Common ceiling & floors R-11.	

ENERGY PERFORMANCE LEVEL (EPL) DISPLAY CARD

ESTIMATED ENERGY PERFORMANCE SCORE* = 83.5

The higher the score, the more efficient the home.

M & M Frank Antonovitz, 15656 Caloosa Creek Circle, Ft. Myers, FL,

1. New construction or existing	New	12. Cooling systems	
2. Single family or multi-family	Single family	a. Central Unit	Cap: 42.0 kBtu/hr
3. Number of units, if multi-family	1		SEER: 10.00
4. Number of Bedrooms	3	b. N/A	
5. Is this a worst case?	No	c. N/A	
6. Conditioned floor area (ft ²)	2395 ft ²		
7. Glass area & type	Single Pane Double Pane	13. Heating systems	
a. Clear - single pane	0.0 ft ² 0.0 ft ²	a. Electric Strip	Cap: 34.1 kBtu/hr
b. Clear - double pane	340.0 ft ² 0.0 ft ²		COP: 1.00
c. Tint/other SHGC - single pane	0.0 ft ² 0.0 ft ²	b. N/A	
d. Tint/other SHGC - double pane		c. N/A	
8. Floor types		14. Hot water systems	
a. Slab-On-Grade Edge Insulation	R=0.0, 254.0(p) ft	a. Electric Resistance	Cap: 50.0 gallons
b. N/A			EF: 0.86
c. N/A		b. N/A	
9. Wall types		c. Conservation credits	
a. Frame, Wood, Exterior	R=19.0, 1814.0 ft ²	(HR-Heat recovery, Solar	
b. Frame, Wood, Adjacent	R=11.0, 144.0 ft ²	DHP-Dedicated heat pump)	
c. N/A		15. HVAC credits	
d. N/A		(CF-Ceiling fan, CV-Cross ventilation,	
e. N/A		HF-Whole house fan,	
10. Ceiling types		PT-Programmable Thermostat,	
a. Under Attic	R=19.0, 168.0 ft ²	MZ-C-Multizone cooling,	
b. Under Attic	R=30.0, 2430.0 ft ²	MZ-H-Multizone heating)	
c. N/A			
11. Ducts			
a. Sup: Unc. Ret: Unc. AH: Garage	Sup. R=6.0, 330.0 ft		
b. N/A			

I certify that this home has complied with the Florida Energy Efficiency Code For Building Construction through the above energy saving features which will be installed (or exceeded) in this home before final inspection. Otherwise, a new EPL Display Card will be completed based on installed Code compliant features.

Builder Signature: Charles H. H. H. H.

Date: 9/2/03

Address of New Home: 15656 Caloosa Creek Circle

City/FL Zip: Ft. Myers 33908



**NOTE: The home's estimated energy performance score is only available through the FLA/RES computer program. This is not a Building Energy Rating. If your score is 80 or greater (or 86 for a US EPA/DOE EnergyStarTM designation), your home may qualify for energy efficiency mortgage (EEM) incentives if you obtain a Florida Energy Gauge Rating. Contact the Energy Gauge Hotline at 321/638-1492 or see the Energy Gauge web site at www.fsec.ucf.edu for information and a list of certified Raters. For information about Florida's Energy Efficiency Code For Building Construction, contact the Department of Community Affairs at 850/487-1824.*

EnergyGauge® (Version: FLRCPB v3.30)

MIAMI-DADE

BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION

MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

NOTICE OF ACCEPTANCE (NOA)

PGT Industries
P.O. Box 1529
Nokomis, FL 34274

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: SH-701 Aluminum Single Hung Window Impact Resistant

APPROVAL DOCUMENT: Drawing No. 4040, titled "Aluminum Single Hung Window", sheets 1 through 4 of 4, prepared, signed and sealed by Robert L. Clark, P.E., dated 10/11/01, bearing the Miami-Dade County Product Control Revision Stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: Large and Small Missile Impact

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA # 01-0629.08 and, consists of this page 1 as well as approval document mentioned above. The submitted documentation was reviewed by Theodore Berman, P.E.



NOA No 02-0702.04
Expiration Date: November 01, 2006
Approval Date: July 16, 2002
Page 1

53.125
MAX.

76.000
MAX.

VENT SIZE: 50 1/2" x JB 1/4"

13 1/8" ON CENTER

ELEVATION

5 3/4"

13.000
MAX. CENTER
TOP HEAD & SILL

LARGE MISSILE IMPACT WINDOWS

- 1.) GLAZING OPTIONS: A. 5/16" (.350) LAMINATED GLASS (1/8" annealed/.090 film/1/8" annealed)
B. 5/16" (.350) LAMINATED GLASS (1/8" heat strengthened/.090 film/1/8" heat strengthened)
- 2.) CONFIGURATIONS: DX
- 3.) DESIGN PRESSURE RATING: SEE TABLE
- 4.) ANCHORS: FROM EACH CORNER (HEAD & SILL)
MAX. 3" FROM EACH CORNER (JAMBS)
MAX. SPACING AT HEAD & SILL: 13.000
MAX. SPACING AT JAMBS: 13.125
- 5.) SHUTTER REQUIREMENT:
NO SHUTTERS REQUIRED
- 6.) REFERENCE TEST REPORT: FL-1889

ITEM	DESCRIPTION	V.T. #	QTY. / LOCATION	VENDOR	VENDOR I
1	FLANGED FRAME HEAD (2)	612225	1	ALUMAX	AF-12225
2	FLANGED FRAME SILL (Alum. 6063-T5)	612226	1	ALUMAX	AF-12226
3	FLANGED FRAME JAMB (Alum. 6063-T5)	612227	2	ALUMAX	AF-12227
4	FIXED MEETING RAIL (Alum. 6063-T5)	612228	1	ALUMAX	AF-12228
5	SASH TOP RAIL (Alum. 6063-T5)	612229	1	ALUMAX	AF-12229
6	SASH BOTTOM RAIL (Alum. 6063-T5)	612230	1	ALUMAX	AF-12230
7	SASH SIDE RAIL (Alum. 6063-T5)	612231	2	ALUMAX	AF-12231
8	GLAZING BEAD (Alum. 6063-T5)	612232	8	ALUMAX	AF-12232
9	WEATHERSTRIP - VINYL BULB	612233	8	ALUMAX	AF-12233
10	WEATHERSTRIP - VINYL BULB	612234	8	ALUMAX	AF-12234
11	WEATHERSTRIP - VINYL BULB	612235	8	ALUMAX	AF-12235
12	WEATHERSTRIP - VINYL BULB	612236	8	ALUMAX	AF-12236
13	WEATHERSTRIP - VINYL BULB	612237	8	ALUMAX	AF-12237
14	WEATHERSTRIP - VINYL BULB	612238	8	ALUMAX	AF-12238
15	WEATHERSTRIP - VINYL BULB	612239	8	ALUMAX	AF-12239
16	WEATHERSTRIP - VINYL BULB	612240	8	ALUMAX	AF-12240
17	WEATHERSTRIP - VINYL BULB	612241	8	ALUMAX	AF-12241
18	WEATHERSTRIP - VINYL BULB	612242	8	ALUMAX	AF-12242
19	WEATHERSTRIP - VINYL BULB	612243	8	ALUMAX	AF-12243
20	WEATHERSTRIP - VINYL BULB	612244	8	ALUMAX	AF-12244
21	WEATHERSTRIP - VINYL BULB	612245	8	ALUMAX	AF-12245
22	WEATHERSTRIP - VINYL BULB	612246	8	ALUMAX	AF-12246
23	WEATHERSTRIP - VINYL BULB	612247	8	ALUMAX	AF-12247
24	WEATHERSTRIP - VINYL BULB	612248	8	ALUMAX	AF-12248
25	WEATHERSTRIP - VINYL BULB	612249	8	ALUMAX	AF-12249
26	WEATHERSTRIP - VINYL BULB	612250	8	ALUMAX	AF-12250
27	WEATHERSTRIP - VINYL BULB	612251	8	ALUMAX	AF-12251
28	WEATHERSTRIP - VINYL BULB	612252	8	ALUMAX	AF-12252
29	WEATHERSTRIP - VINYL BULB	612253	8	ALUMAX	AF-12253

11

DESIGN PRESSURE RATING (P.S.F.)

5/16 LAMINATED W/ ANNEALED GLASS	5/16 LAMINATED W/ HEAT STRENGTHENED GLASS
WATER INFILTRATION REQUIRED	WATER INFILTRATION REQUIRED
-50.0 +50.0	-80.0 +66.7
-50.0 +50.0	-80.0 +60.0

PRODUCT REVISED
as complying with the Florida
Building Code
Expiration Date 11/01/04
By: [Signature]
Division
Nicholas Drake Product Control

PRODUCT REVIEWED
ACCEPTANCE No. 01-0629-01
EXPIRATION DATE November 2, 2004
By: [Signature]
Division
Nicholas Drake Product Control



PGT
INDUSTRIES

1070 TECHNOLOGY DRIVE
NOROKOM, FL 34275
P.O. BOX 1529
NOROKOM, FL 34274

Robert L. Clark, P.E.
P/E 439712
Structural

ELEVATION & PARTS LIST

ALUMINUM SINGLE HUNG WINDOW	Sheet: 1 of 4	Rev: B
Series/Variant: SH-701	Scale: NTS	Drawing No. 4040

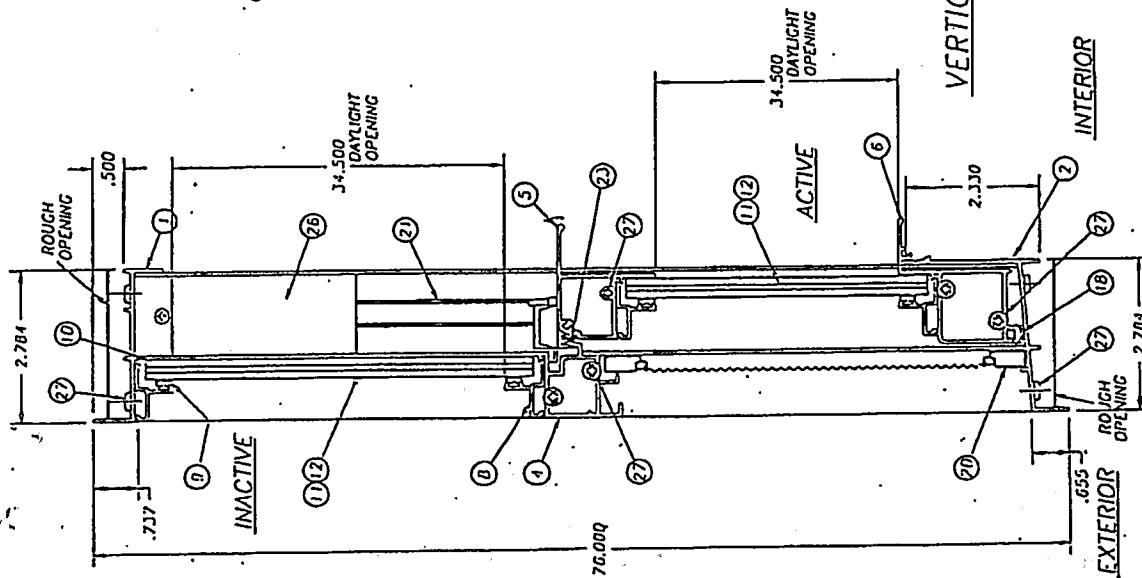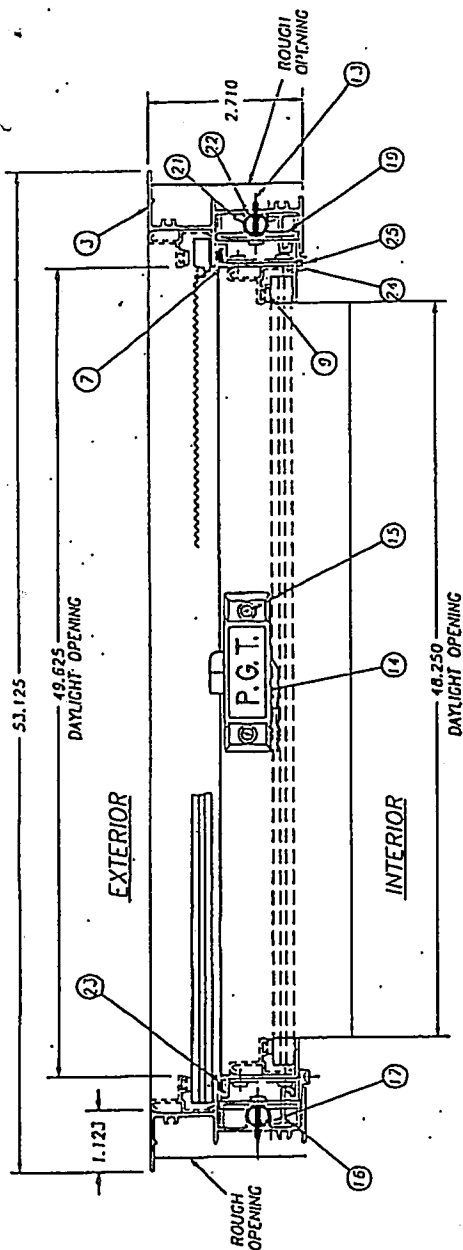

PRODUCT REVISED
in compliance with the Florida
Building Code
Acceptance No. 02-0302.04
Expiration Date 11/01/06
By: *Robert L. Clark, P.E.*
Allison Trade Product Control
Division
7/11/12

PRODUCT RENEWED
ACCEPTANCE No. 02-0679.01
EXPIRATION DATE: 11/01/16
By: *Robert L. Clark, P.E.*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE UNIT

Revised By:	Date:	Revised By:	Date:
F.K.	10/11/00	TB, TABLE, EXTR.	
D.B.	8/18/98	Revised:	
D.B.	2/9/98	Revised:	

SECTIONS

P.G.T.
INDUSTRIES

1070 TECHNOLOGY DRIVE
NOKOMUS, FL 34275
P.O. BOX 1529
NOKOMUS, FL 34274





Robert L. Clark, P.E.
10/14/01

Robert L. Clark, P.E.
P.E. #39712
STRUCTURAL

ALUMINUM SINGLE HUNG WINDOW

File:	Scale:	Sheet:	Drawing No.	Rev:
SH-701	NTS	2 of 4	1010	B

REFERENCE TEST REPORT: FTL-1889

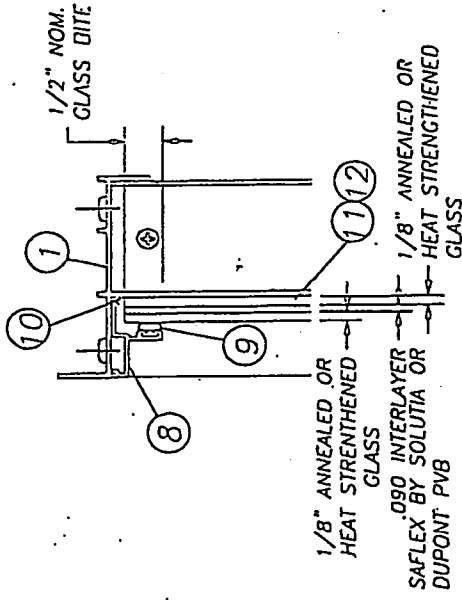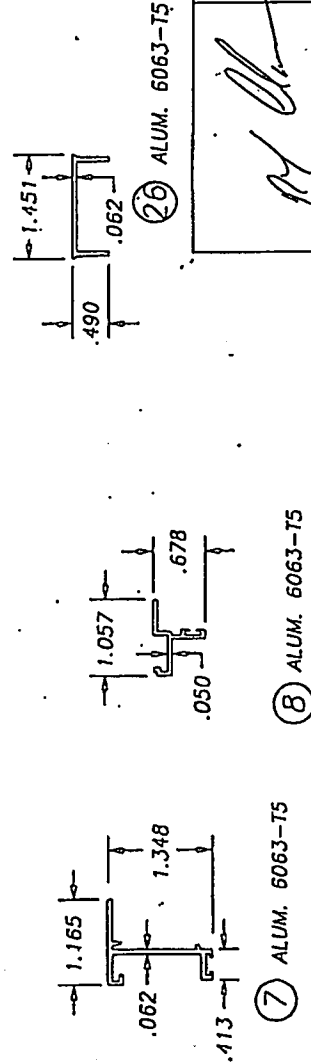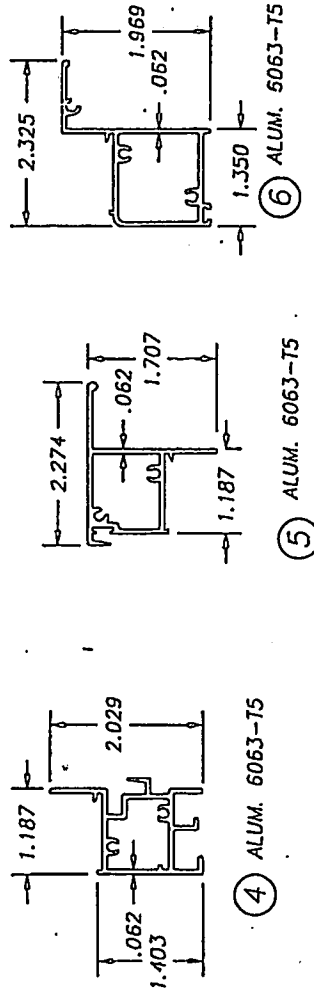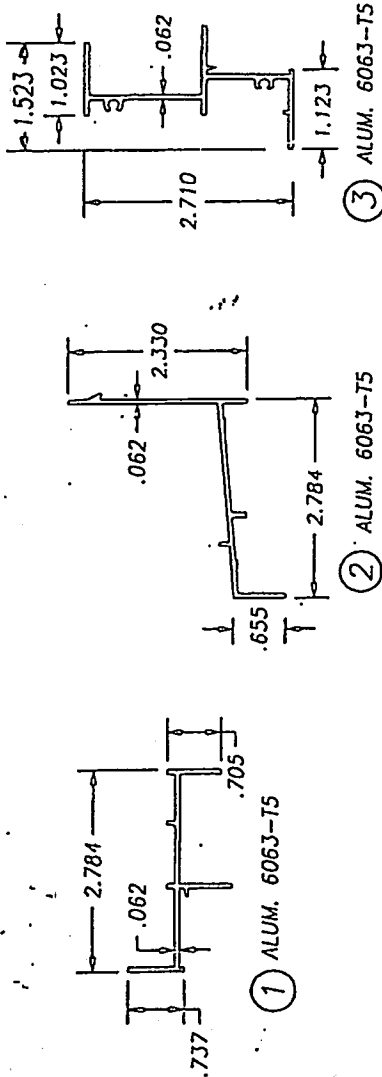

PRODUCT REVIEWED
in compliance with the Florida
Building Code
Approval No. 02-070204
Expiration Date: 11/01/06
By: [Signature]
Aluma-Tech Product Control
Division
7/11/02

PRODUCT REVIEWED
IN COMPLIANCE WITH THE
FLORIDA BUILDING CODE
APPROVAL NO. 02-070204
EXPIRATION DATE: 11/01/06
BY: [Signature]
ALUMATECH PRODUCT CONTROL
DIVISION
7/11/02

Revised By	Revised Date	Revised By	Revised Date
F.K.	10/11/00	T.B.	TABLE, EXTR.
D.B.	8/18/98		
D.B.	2/9/98		

RGT INDUSTRIES







1070 TECHNOLOGY DRIVE
NOKOMIS, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274

Robert L. Clark, P.E.
P.E. #39712
Structural

REFERENCE TEST REPORT: FTL-1889

EXTRUSIONS & GLAZING OPTIONS
ALUMINUM SINGLE HUNG WINDOW

Series/Model	SH-701	Series	NTS	Sheet	3 of 4	Drawing No.	1010	Rev.	B
--------------	--------	--------	-----	-------	--------	-------------	------	------	---

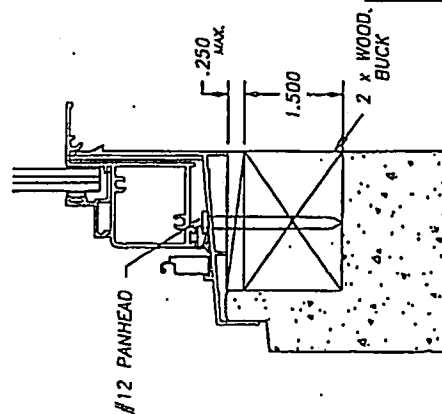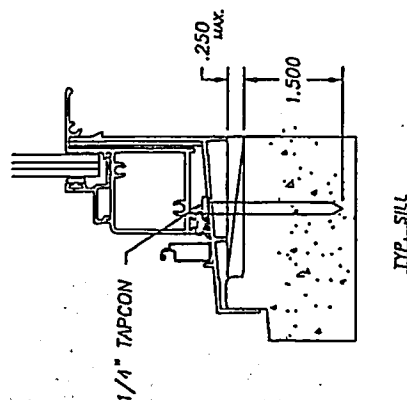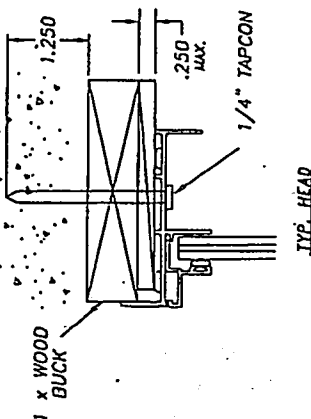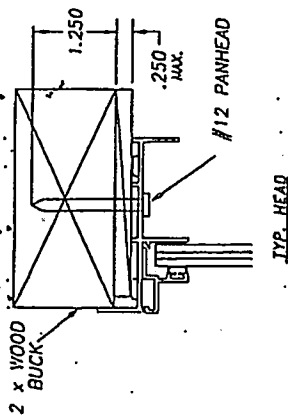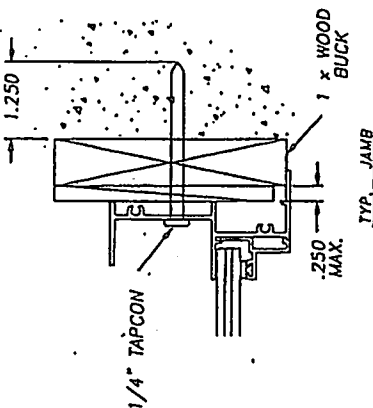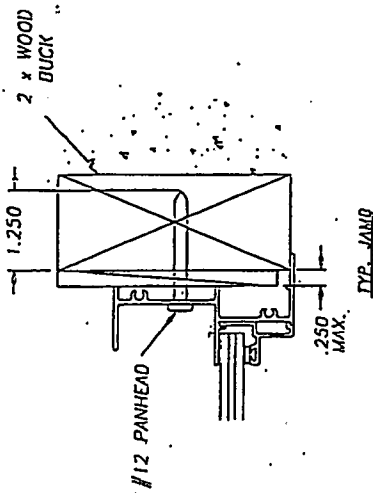

PRODUCT REVISIONS
as supplied with On Florida
Building Code
Approval No. 01-0302.04
Expiration Date 11/01/06
By: *Blanche Germany*
Florida Dept. Product Control
11/11/06

PRODUCT REVISIONS
AS SUPPLIED WITH: 01-06250
DATE: 11/01/06
BY: *Blanche Germany*
FLORIDA DEPT. PRODUCT CONTROL

Revised By:	Date:	Revisions:
F.K.	10/11/00	TB, TABLE, EXTR.
D.B.	8/18/98	
D.B.	2/9/98	

PCT
INDUSTRIES

1070 TECHNOLOGY DRIVE
NOKOMIS, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274

Robert L. Clark, P.E.
10/11/06

Robert L. Clark, P.E.
PE #39712
Structural

ANCHORAGE

TITLE: ALUMINUM SINGLE HUNG WINDOW

Series/Date:	Sheet:	Sheet:	Drawing No.	Rev.
SH-701	NTS	4 of 4	4040	B

REFERENCE TEST REPORT: FTL-1889



BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION

MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

NOTICE OF ACCEPTANCE (NOA)

PGT Industries
P.O. Box 1529
Nokomis, FL 34274

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Series PW-701 Aluminum Fixed Window

APPROVAL DOCUMENT: Drawing No. 4231, titled "Aluminum Fixed Window", sheets 1 through 8 of 8, prepared, signed and sealed by Robert L. Clark, P.E., dated 8/22/01, bearing the Miami-Dade County Product Control Revision Stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: Non-Impact & Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.


INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA # 01-0102.01 and, consists of this page 1 as well as approval document mentioned above.

The submitted documentation was reviewed by **Theodore Berman, P.E.**




NOA No 02-0701.07
Expiration Date: September 13, 2006
Approval Date: July 12, 2002
Page 1

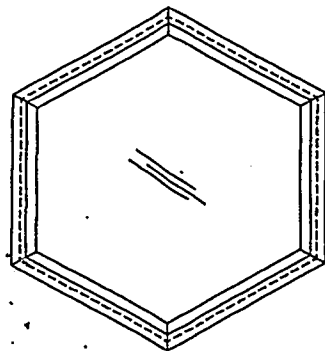**HEXAGON**


60" BETWEEN FLATS

Maximum Area 21.65 sq. ft.

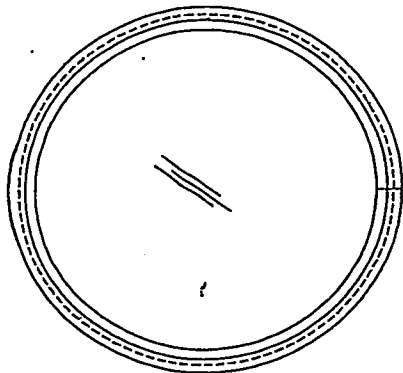**FULL CIRCLE**


Ø60"

Maximum Area 19.64 sq. ft.

**FAN**


96" X 47"

Maximum Area 24.47 sq. ft.

**ELLIPTICAL**

96" X 47"

Maximum Area 24.61 sq. ft.

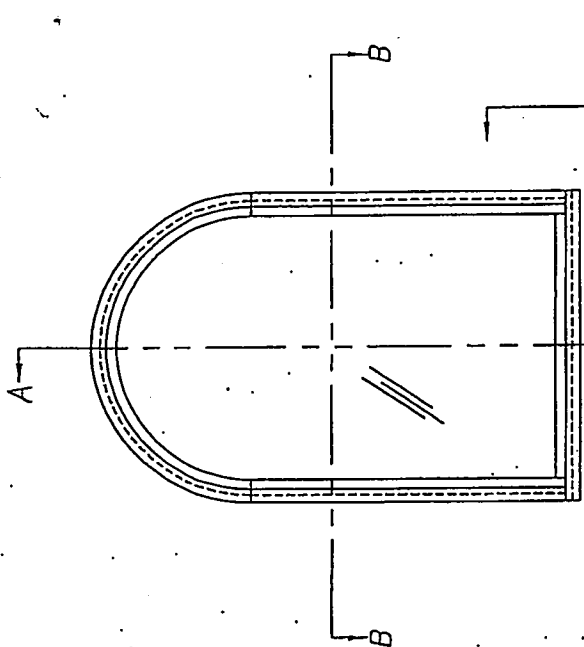**ARCH.**

48" X 96"

Maximum Area 30.28 sq. ft.

DETAIL C
SEE SHT. 7**LARGE MISSILE IMPACT WINDOWS**

1.) GLAZING: 7/16" LAMINATED W/INTERLAYER DUPONT BUCACITE PVB

2.) CONFIGURATIONS: 0

3.) DESIGN PRESSURE RATING:

+60.0 PSF & -60.0 PSF (3/16" HEAT STRENGTHENED/.090/3/16" HEAT STRENGTHENED LAM)

+36.0 PSF & -36.0 PSF (3/16" ANNEALED/.090/3/16" ANNEALED)

4.) ANCHOR MAXIMUM SPACING: 12.000"

5.) NO SHUTTERS REQUIRED

6.) ALL FRAME JOINTS TO BE SEAM WELDED

7.) REFERENCE TEST REPORT: FTL-2797

PRODUCT REVISED
as complies with the Florida
Building Code
Acceptance No. 02-0701.07
Expiration Date 03/13/16
By *Michael D. Smith*
Michael D. Smith Product Control
Division

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE *SEP 13 2001*
BY *Michael D. Smith*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0102-01

RGT
INDUSTRIES

1070 TECHNOLOGY DRIVE
HOKOMES, FL 32175

Robert L. Clark, P.E.
PE #3712
Structural

R. L. Clark
8/2/02

Revised By: Date: Revisions:

Drawn By: F.K.

Date: 8/13/01

REDRAWN

Description:

ELEVATIONS, 7/16 LAMINATED GLASS

Title:

ALUMINUM FIXED WINDOW

Scale:

P.O. BOX 1529
HOKOMES, FL 32174

Series/Model:

PW-701

Sheet:

NTS


1 of 8

Drawing No.


4231

Rev:


C

TRAPEZOID


48" x 96"
Maximum Area 30.28 sq. ft.

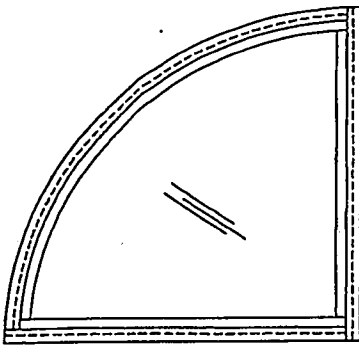QUARTER CIRCLE


68" x 68"
Maximum Area 25.22 sq. ft.

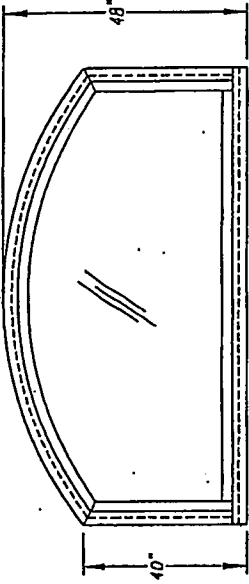EYEBROW

96" x 48"
Maximum Area 30.24 sq. ft.

OCTAGON


60" x 60"
Maximum Area 20.71 sq. ft.

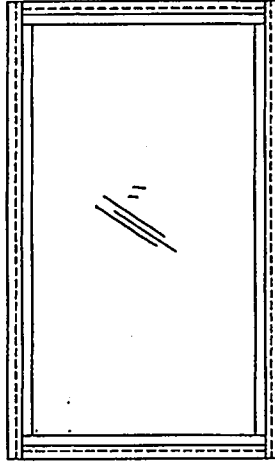RECTANGLE

48" x 96"
Maximum Area 32.00 sq. ft.

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 02-030103
Expiration Date 03/13/06
By: *Robert L. Clark, P.E.*
Product Detail Product Control
Division

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE: SEP 13 2001
BY: *Robert L. Clark, P.E.*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0102-01

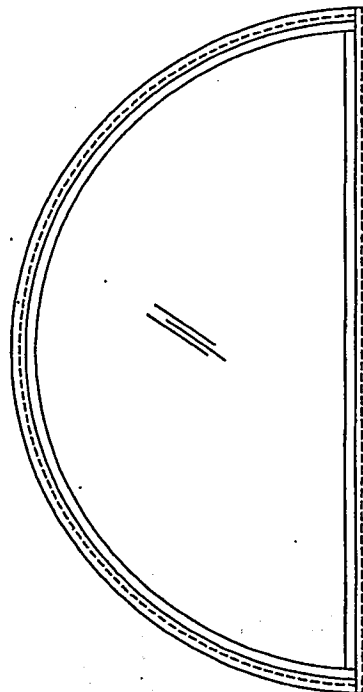HALF CIRCLE


96" x 48"
Maximum Area 25.13 sq. ft.

LARGE MISSILE IMPACT WINDOWS. CONT.

Robert L. Clark, P.E.
8/22/01


Robert L. Clark, P.E.
PE #39712
Structural

Drawn By: F.K.	Revised By: Date: 8/13/01	Revisions:
Description: ELEVATIONS, 7/16 LAMINATED GLASS		
Title: ALUMINUM FIXED WINDOW		
P.O. BOX 1529 NORONAS, FL 34274	Series/Model: PW-701	Scale: NTS
1070 TECHNOLOGY DRIVE NORONAS, FL 34275	Sheet: 2 of 8	Drawing No. 4231
		Rev: C

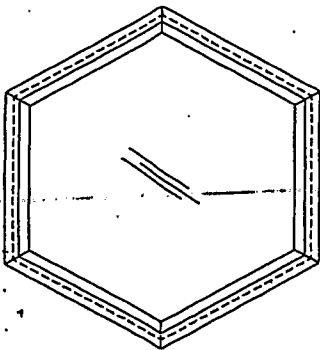


HEXAGON

60" BETWEEN FLATS
Maximum Area 21.65 sq. ft.

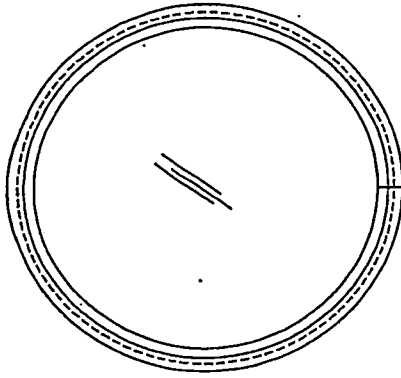


FULL CIRCLE

Ø60"
Maximum Area 19.64 sq. ft.




FAN

120" x 55"
Maximum Area 35.20 sq. ft.



ELLIPTICAL

120" x 48"
Maximum Area 31.46 sq. ft.

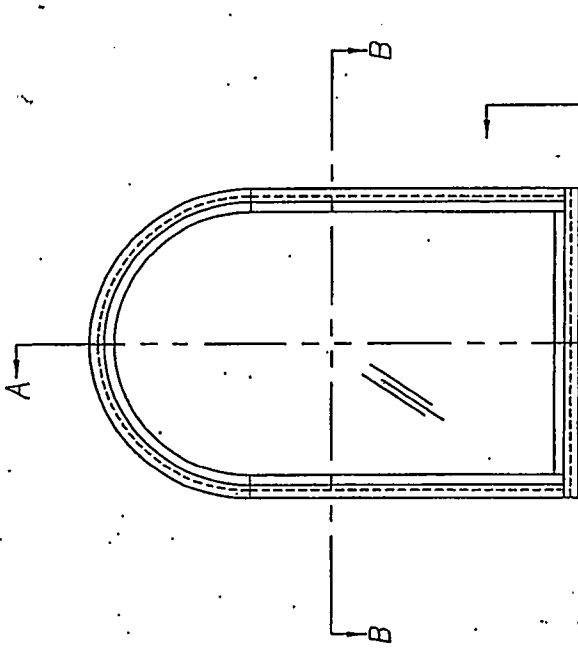

ARCH

60" x 120"
Maximum Area 47.32 sq. ft.

DETAIL C
SEE SHT. 7

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 02-030107
Expiration Date 09/15/09
By: *Robert L. Clark, P.E.*
Michael Clark Product Control
Director

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE SEP 13 2009
BY: *Michael Clark*
PROJECT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 02-030107

NON-IMPACT WINDOWS

- 1.) GLAZING: 3/16" TEMPERED
- 2.) CONFIGURATIONS: 0
- 3.) FOR DESIGN PRESSURE RATING: SEE COMPARATIVE ANALYSIS ON SHT. 8 OF 8
- 4.) ANCHOR MAXIMUM SPACING: 12,000"
- 5.) SHUTTERS REQUIRED AT ALL INSTALLATIONS
- 6.) ALL FRAME JOINTS TO BE SEAM WELDED
- 7.) REFERENCE TEST REPORTS: FTL-2763, 2780 & 2816

PCT
INDUSTRIES

Drawn By: F.K.

Date: 8/13/01

Revisions:
REDRAWN

Description:

ELEVATIONS, 3/16. TEMPERED GLASS

Title:

ALUMINUM FIXED WINDOW

1070 TECHNOLOGY DRIVE
HOKOMAS, FL 34275

P.O. BOX 1529
HOKOMAS, FL 34274

Series/Model:
PIW-701

Scale:
NTS

Sheet:
3 of 8


Drawing No.

4231

Rev:
C


Robert L. Clark, P.E.
8/24/01

Robert L. Clark, P.E.
PE #39712
Structural




TRAPEZOID

60" x 120"
Maximum Area 43.75 sq. ft.

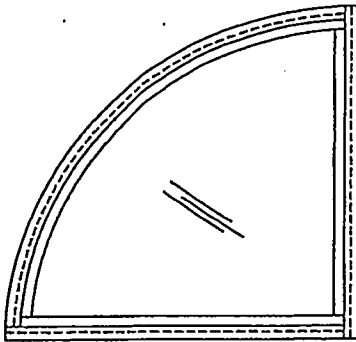


QUARTER CIRCLE

68" x 68"
Maximum Area 25.22 sq. ft.

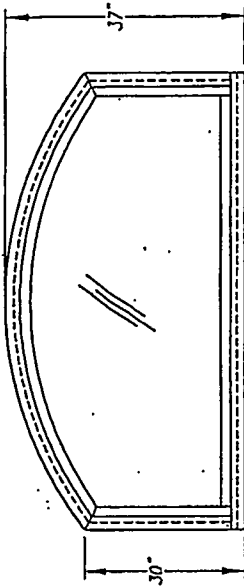


EYEBROW

74" x 37"
Maximum Area 17.83 sq. ft.



OCTAGON

60" x 60"
Maximum Area 20.71 sq. ft.

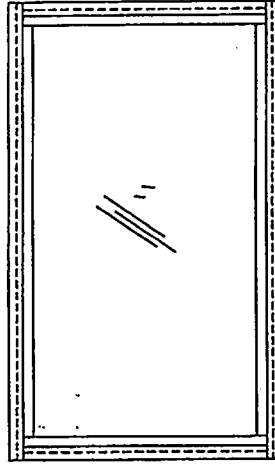


RECTANGLE

60" x 120"
Maximum Area 50.00 sq. ft.

PRODUCT REVISED
to comply with the Florida
Building Code
Acceptance No. 02-030107
Expiration Date 09/13/06
By: *Michael Perry*
Miami Dade Product Control
Division

APPROVED AS COMPLIING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE SEP 13 2007
BY: *Michael Perry*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-Q102-01

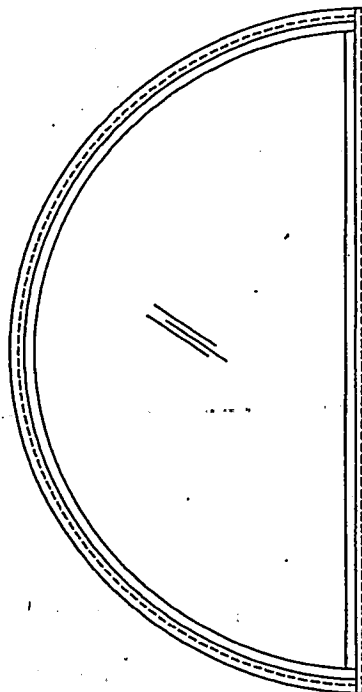

HALF CIRCLE

120" x 60"
Maximum Area 39.27 sq. ft.


PGT
INDUSTRIES

NON-IMPACT WINDOWS CONT.

R. L. Clark
8/22/01

Robert L. Clark, P.E.
PE #39712
Structural

Drawn By: F.K.	Revised By: Date:	Revisions:
Date: 8/13/01	REDRAWN	
Description: ELEVATIONS, 3/16 TEMPERED GLASS		
Title: ALUMINUM FIXED WINDOW		
P.O. Box 1529 NOKOMIS, FL 34275	Series/Model: PW-701	Scale: NTS
Sheet: 4 of 8	Drawing No.	Rev:
	4231	C

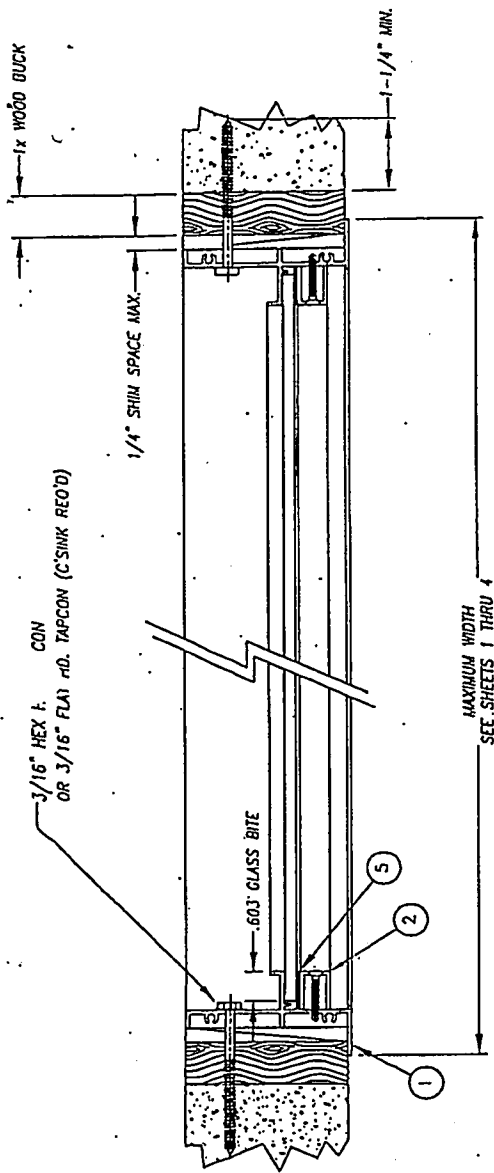

SECTION B-B
TYPICAL SECTION
& ALTERNATE INSTALLATION INTO CONCRETE

11

NOTES: 1. MAXIMUM OVERALL DIMENSIONS ARE APPLICABLE TO SECTIONED ARCH. SHAPES.
ANCHORAGE METHODS ARE APPLICABLE TO ALL SHAPES SHOWN ON SHEETS 1 THROUGH 4 OF 8.


2. REFERENCE TEST REPORTS: FTL-2763, FTL-2780, FTL-2797 & FTL-2816

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 02-030103
Expiration Date: 8/13/06
BY: *[Signature]*
Head Code Product Control
Division

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE: SEP 13 2000
BY: *[Signature]*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0107-01

RGT INDUSTRIES	F.T.D. BOX 1939 NORFOLK, VA 23505		P.O. BOX 1939 NORFOLK, VA 23505		Series/Model: PW-701		Scale: NTS		Sheet: 5 of 8		Drawing No. 4231		Rev: C	
	1070 TECHNOLOGY DRIVE NORFOLK, VA 23505		F.T.D. BOX 1939 NORFOLK, VA 23505		Series/Model: PW-701		Scale: NTS		Sheet: 5 of 8		Drawing No. 4231		Rev: C	

[Signature]
8/24/04
Robert L. Clark, P.E.
PE #39712
Structural

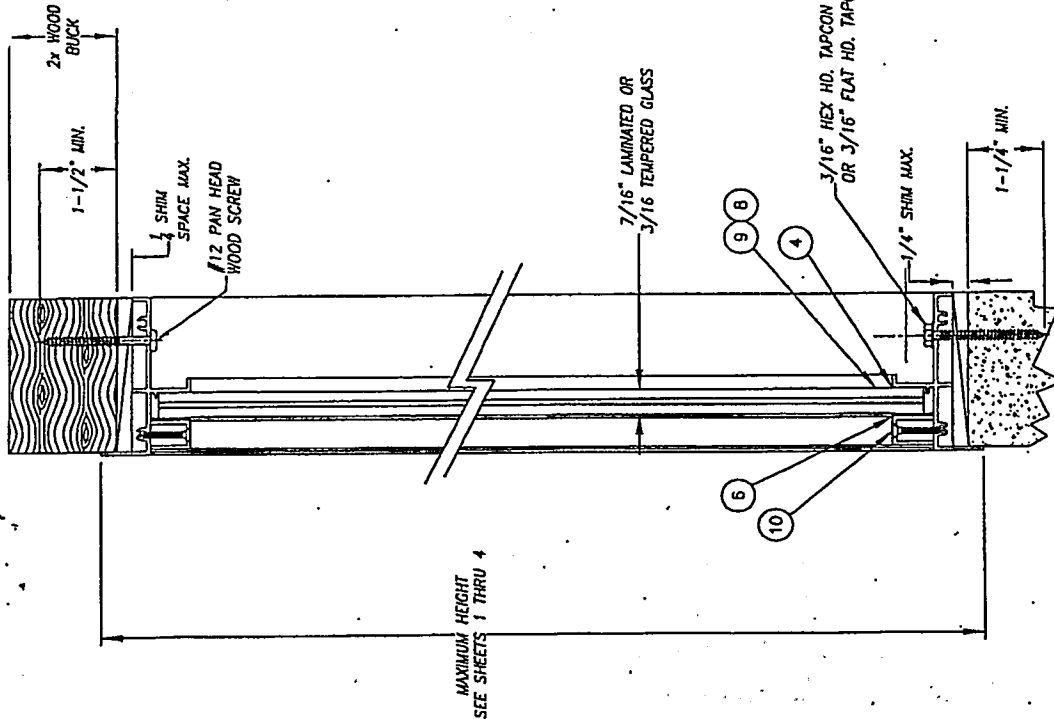


SECTION A-A
TYPICAL SECTION
& INSTALLATION INTO CONCRETE AT SILL & WOOD AT HEAD


JILL OF MATERIAL

MK.	PART #	DESCRIPTION	VENDOR	VENDOR #
1	612242	FRAME HEAD, SILL & JAMB	6063-T5	AF-12242
2	6533402	U-CHANNEL GLAZING BEAD	6063-T5	AF-533402
3	7834	#8 x 3/4 PN. PH. SMS	SPENCER OR =	
4	62899C/62501C	SILICON BACK BEDDING	DOW/G.E. OR =	
5	61412K	CLOSED CELL FOAM TAPE FOR 3/16 GLASS	TAPE SPECIALISTS OF FL OR =	
6	62BV1510	CLOSED CELL FOAM TAPE FOR 7/16 GLASS	TAPE SPECIALISTS OF FL OR =	
7	6SM55W	SEAM SEALER	SCHNEE/MOREHEAD OR =	SM5504
8		3/16 TEMPERED GLASS	TRIPLE DIAMOND GLASS OR =	
9	SEE NOTE	7/16 LAMI (.187HS/.090/.187HS)	TRIPLE DIAMOND GLASS OR =	
10	7PWSW	#6 x 7/8 FL. PH. TEK	SPENCER OR =	
11	SEE NOTE	7/16 LAMI (.187A/.090/.187A)	TRIPLE DIAMOND GLASS OR =	


NOTE: ITEM 9 & 11 USES DUPONT BUTACITE PVB INTERLAYER



② PW-701 U-CHANNEL
GLAZING BEAD

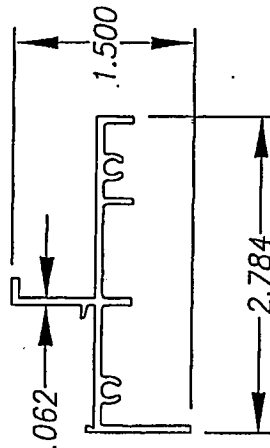

① PW-701 FRAME
EXTRUSION



VISIBLE LIGHT CALCULATION

WINDOW WIDTH "TIP TO TIP" - 3.00"

WINDOW HEIGHT "TIP TO TIP" - 3.00"

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 02-0101.07
Expiration Date 08/13/06
By *Robert L. Clark, PE*
Miami Code Product Control
Division

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE SEP 13 2001
BY *Robert L. Clark, PE*
PROJECT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0107.01

RGT
INDUSTRIES

Drawn By: F.K. Date: 8/13/01 REDRAWN

Description:
EXTRUSION PROFILES & B.O.M.

Title:
ALUMINUM FIXED WINDOW

1070 TECHNOLOGY DRIVE
HOMOS, FL 34275

P.O. BOX 1329
HOMOS, FL 34274

Series/Model:
PW-701

Scale:
NTS

Sheet:
6 of 8


Drawing No.

4231

Rev: C

REFERENCE TEST REPORTS: FTL-2763, FTL-2780, FTL-2797 & 2816

Robert L. Clark, PE
PE #39712
Structural

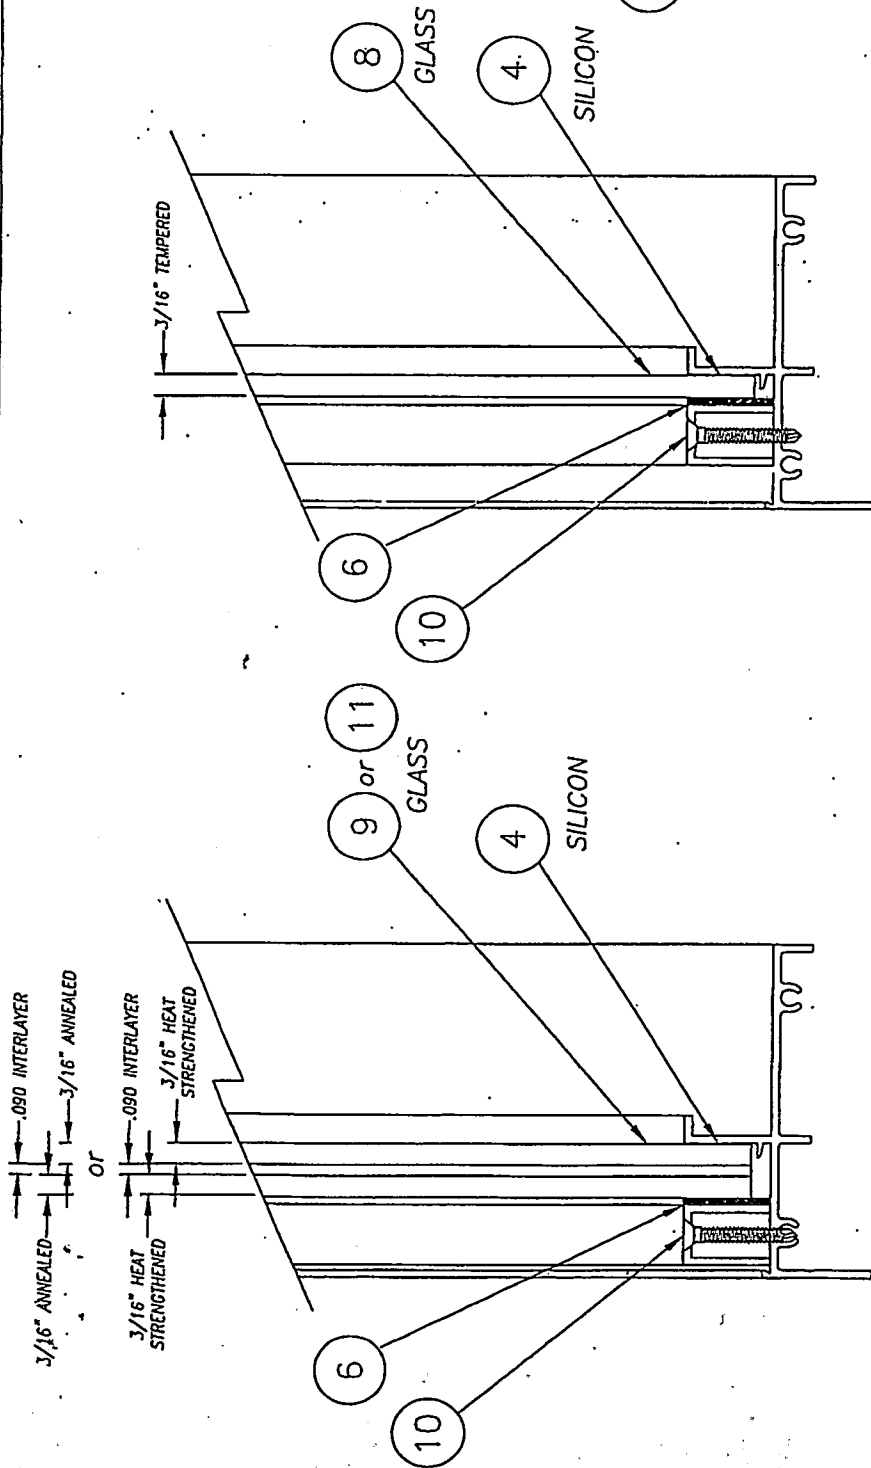

TYPICAL GLAZING DETAIL

3/16" TEMPERED GLASS

TYPICAL GLAZING DETAIL

7/16" LAMINATED GLASS

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 07-030107
Expiration Date 09/13/09
By *Glenn Korman*
Miami Dade Product Control
Division

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE *SEP 13 2009*
BY *Glenn Korman*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 07-030107

PCT
INDUSTRIES

Robert L. Clark, P.E.
PE #39712
Structural

REFERENCE TEST REPORTS: FTL-2763, FTL-2780, FTL-2797 & 2816

Drawn By: F.K.	Revised By: B.13/01	Revisions:
Description: GLAZING & CORNER DETAIL		
Title: ALUMINUM FIXED WINDOW		
P.O. BOX 1529 NOKOMUS, FL 31274	Series/Model: PW-701	Scale: NTS
Sheet: 7 of 8	Drawing No. 4231	Rev: C

3/16" TEMPERED GLASSNOTES:

- 1.) Negative Design Loads based on Comparative Analysis and Glass Table ASTM E1300.
- 2.) Positive Design Loads based on Comparative Analysis and Water Test Pressure.
- 3.) Numbers are for #12 screws or 3/16" Tapcons.
- 4.) Anchor maximum spacing: 12"

Negative Design Loads

Window Heights	Window Widths									
	19.125	24.000	26.500	37.000	48.000	60.000	97.000	111.000	120.000	120.000
26.000	135.00	135.00	135.00	135.00	135.00	135.00	135.00	122.90	112.60	
39.000	135.00	135.00	135.00	135.00	135.00	135.00	79.40	70.00	66.10	
51.000	135.00	135.00	135.00	135.00	90.60	80.30	77.40	63.00	55.90	
60.000	135.00	135.00	135.00	135.00	90.60	58.00	58.00	58.00	57.40	

Positive Design Loads

Window Heights	Window Widths									
	19.125	24.000	26.500	37.000	48.000	60.000	97.000	111.000	120.000	120.000
26.000	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	
39.000	100.00	100.00	100.00	100.00	100.00	100.00	79.40	70.00	66.10	
51.000	100.00	100.00	100.00	100.00	90.60	80.30	77.40	63.00	55.90	
60.000	100.00	100.00	100.00	100.00	90.60	58.00	58.00	58.00	57.40	

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 02-030103
Expiration Date 09/13/04
By *[Signature]*
General Trade Product Control
P. King


APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE SEP 13 2003
BY *[Signature]*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO 01-0102-01

PRT
INDUSTRIES

REFERENCE TEST REPORTS: FTL-2763, FTL-2780, & 2816

[Signature]
Robert L. Clark, PE.
PE #30712
Structural

Drawn By: F.K.	Revised By: Date:	Revisions:
	8/13/01	REDRAWN
Description: COMPARATIVE ANALYSIS, NON-IMPACT		
Title: ALUMINUM FIXED WINDOW		
P.O. BOX 1539 NOKOMIS, FL 32214	Series/Model: PW-701	Scale: NTS
	Sheet: 8 of 8	Drawn No. 4231
1070 TECHNOLOGY DRIVE NOKOMIS, FL 32215		Rev: C

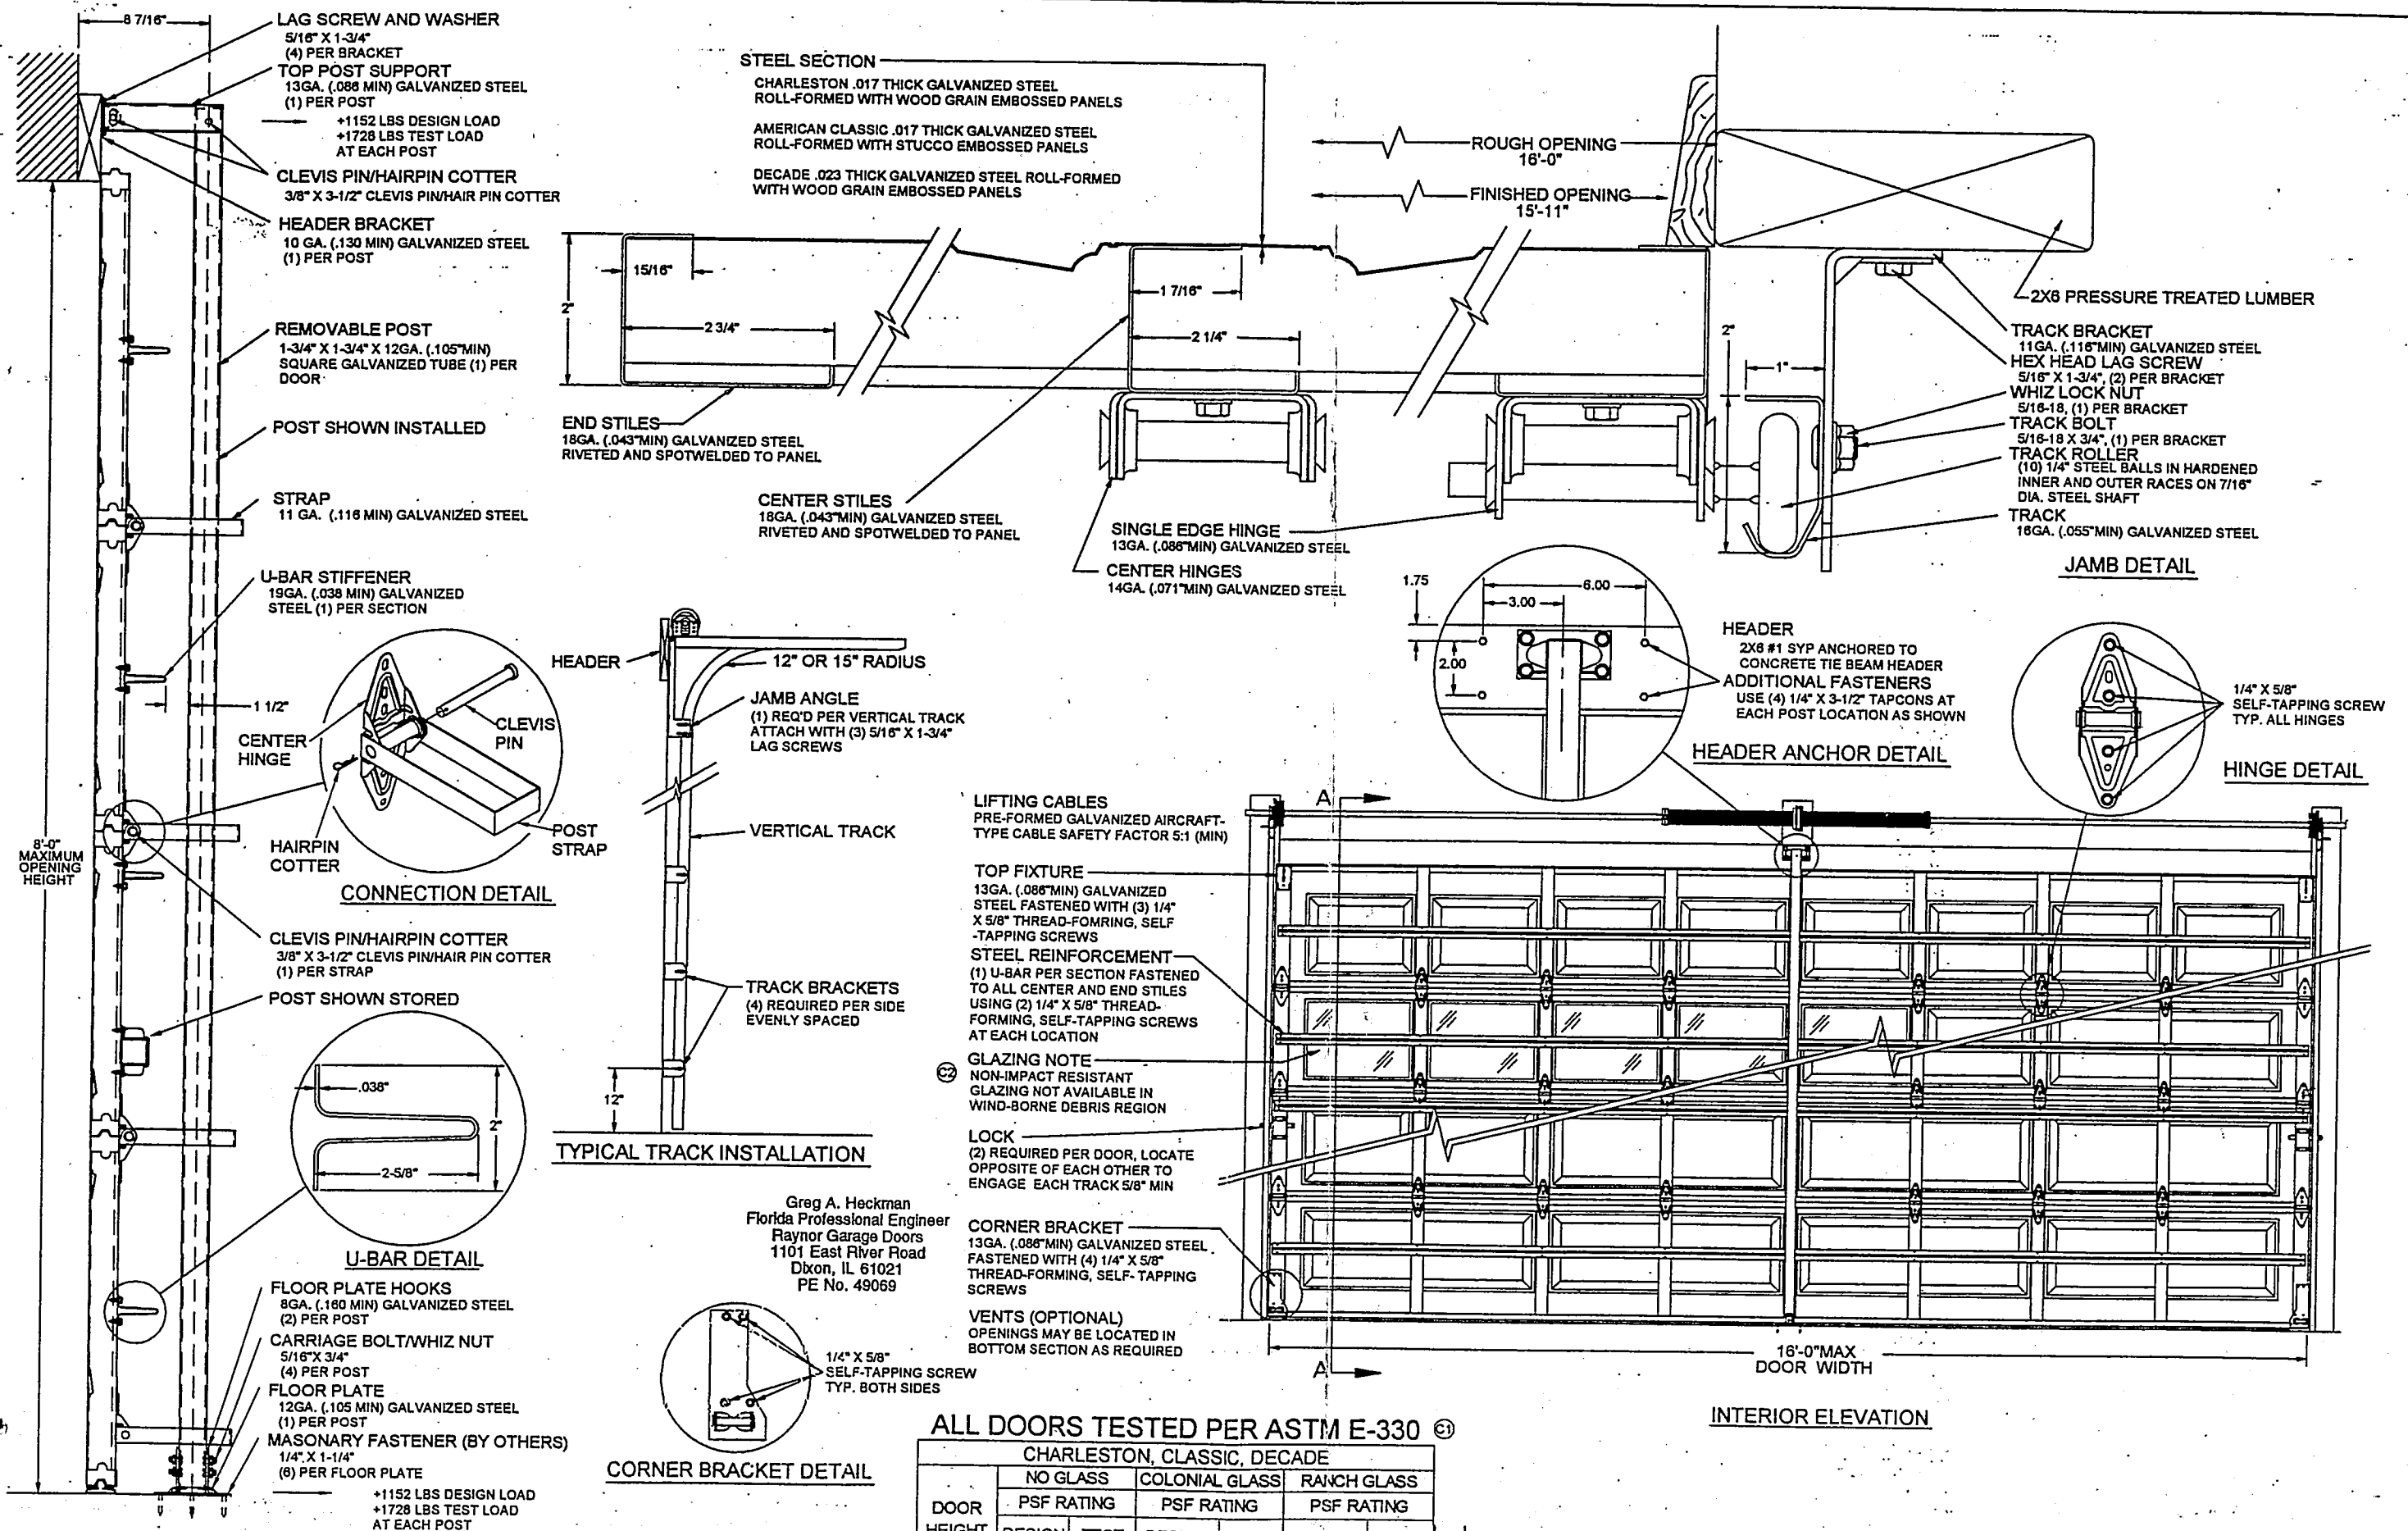

ALL DOORS TESTED PER ASTM E-330 ©

CHARLESTON, CLASSIC, DECADE						
DOOR HEIGHT	NO GLASS		COLONIAL GLASS		RANCH GLASS	
	DESIGN	TEST	DESIGN	TEST	DESIGN	TEST
7' 0"	33.3	50.0	33.3	50.0	N/A	N/A
8' 0"	29.0	43.5	N/A	N/A	N/A	N/A

REV	DESCRIPTION	ECH. NO.	DATE	ECH. NO.	DATE	SCALE	BY	CHECKED	DATE	TITLE	SHEET	REV
C	1) ADDED ASTM NOTE, 2) ADDED GLAZING NOTE	4281	09/17/02			NONE	G. WEDGEND			SPEC. WIND LOAD CHARLESTON/CLASSIC/DECADE 16' 0" WIDE	1	C
B	ADDED 7' HIGH COLONIAL GLASS	3759	05/31/00				GW					
A	RELEASED TO PRODUCTION	3239B	10/18/97									

SALE
9-19-02


OXO

Opaque Inswing Unit

8595
COP-WL-EN4104-02

WOOD-EDGE STEEL DOORS

APPROVED ARRANGEMENT:



Test Data Review Certificate #3026447C and COP/Test Report Validation Matrix #3026447C-001 provides additional information - available from the ITS/WH website (www.ettsemko.com), the Masonite website (www.masonite.com) or the Masonite technical center.

Note:

Units of other sizes are covered by this report as long as the panels used do not exceed 3'0" x 6'8".

Single Door with 2 Sidelites
Maximum unit size = 9'0" x 6'8"

Design Pressure

+67.0/-67.0 with maximum sidelite panel width of 1'2"

+55.0/-55.0 with maximum sidelite panel width of 3'0"
limited water unless special threshold design is used.

Large Missile Impact Resistance

Hurricane protective system (shutters) is NOT REQUIRED on opaque panels, but is required on glazed panels.

Actual design pressure and impact resistant requirements for a specific building design and geographic location is determined by ASCE 7-national, state or local building codes specify the edition required.

MINIMUM ASSEMBLY DETAIL:

Compliance requires that minimum assembly details have been followed - see MAD-WL-MA0004-02 or MAD-WL-MA0007-02 and MAD-WL-MA0041-02.


MINIMUM INSTALLATION DETAIL:

Compliance requires that minimum installation details have been followed - see MID-WL-MA0004-02.

APPROVED DOOR STYLES:



Flush



Arch Top 3-panel



6-panel



New England 4-panel



Eyebrow 4-panel



8-panel




9-panel




5-panel



5-panel with scroll



Eyebrow 5-panel



Eyebrow 5-panel with scroll

Entergy
Entry Systems

June 17, 2002
Our continuing program of product improvement makes specifications, design and product detail subject to change without notice.

PREMDOR Collection
Premium Quality Doors




Exclusively from

Masonite
Masonite International Corporation

OXO

Opaque Inswing Unit

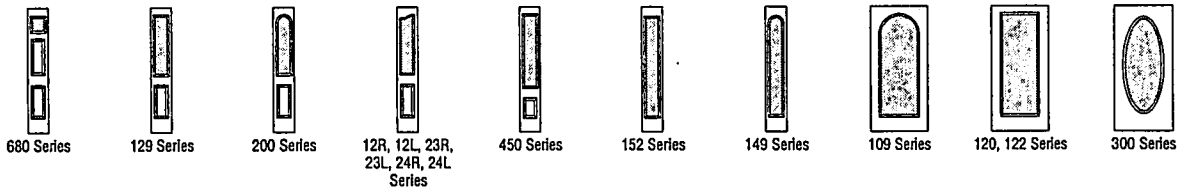COP-WL-EN4104-02**WOOD-EDGE STEEL DOORS****APPROVED SIDELITE STYLES:****CERTIFIED TEST REPORTS:**

NCTL 210-1905-7, 8, 9; NCTL-210-1880-10, 12

Certifying Engineer and License Number: Barry D. Portney, P.E. / 16258.

Unit Tested in Accordance with Miami-Dade BCCO PA201, PA202 and PA203.

Door panels constructed from 26-gauge 0.017" thick steel skins. Both stiles constructed from wood. Top end rails constructed of 0.032" steel. Bottom end rails constructed of 0.032" steel. Interior cavity of slab filled with rigid polyurethane foam core. Sidelite panels glazed with insulated glass mounted in a rigid plastic lip lite surround.

Frame constructed of wood with an extruded aluminum threshold.

PRODUCT COMPLIANCE LABELING:

TESTED IN ACCORDANCE WITH
MIAMI-DADE BCCO
PA201, PA202 & PA203

COMPANY NAME
CITY, STATE

To the best of my knowledge and ability the above side-hinged exterior door unit conforms to the requirements of the 2001 Florida Building Code, Chapter 17 (Structural Tests and Inspections).

State of Florida, Professional Engineer
Kurt Balthazor, P.E. – License Number 56533



Test Data Review Certificate #3026447C and COP/Test Report Validation Matrix #3026447C-001 provides additional information - available from the ITS/WH website (www.etssemko.com), the Masonite website (www.masonite.com) or the Masonite technical center.

2

Entergy
Entry Systems

June 17, 2002


Our continuing program of product improvement makes specifications, design and product detail subject to change without notice.



Exclusively from

Masonite International Corporation

SINGLE DOOR WITH 2 SIDELITES

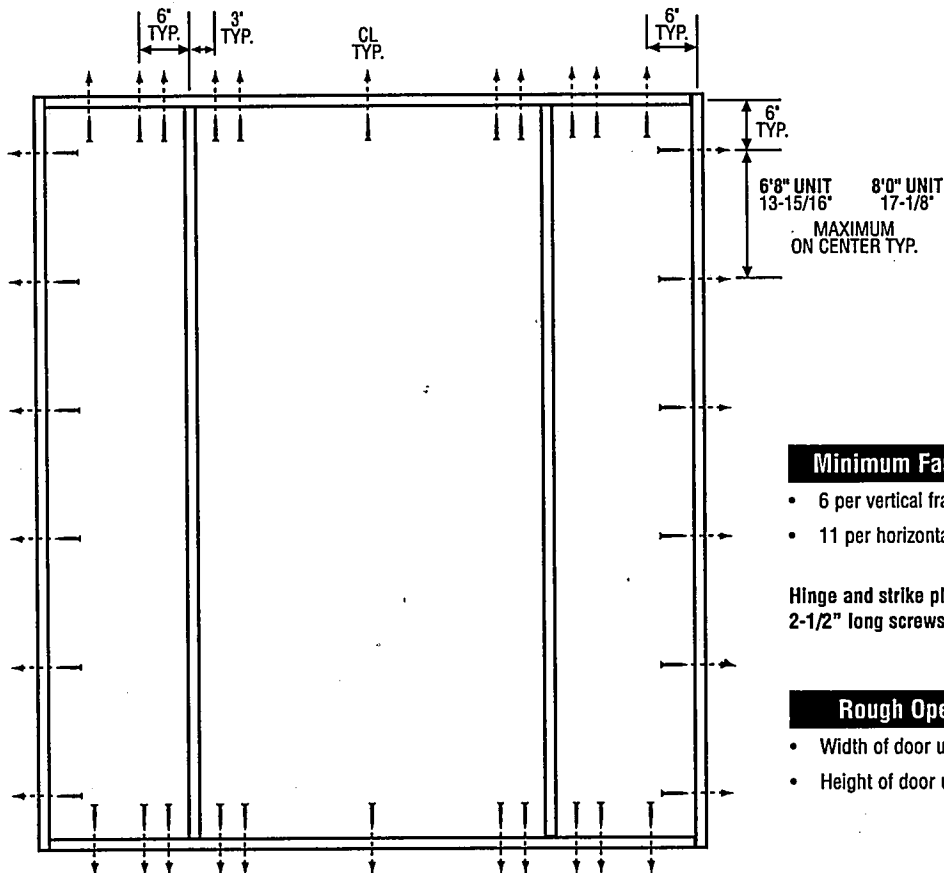

Minimum Fastener Count

- 6 per vertical framing member
- 11 per horizontal framing member

Hinge and strike plates require two 2-1/2" long screws per location.

Rough Opening (RO)

- Width of door unit plus 1/2"
- Height of door unit plus 1/4"



Test Data Review Certificate #3026447A; #3026447B; #3026447C and COP/Test Report Validation Matrix #3026447A-001, 002, 003; #3026447B-001, 002, 003; #3026447C-001, 002, 003 provides additional information - available from the ITS/WH website (www.itswh.com), the Masonite website (www.masonite.com) or the Masonite technical center.

Latching Hardware:

- Compliance requires that GRADE 3 or better (ANSI/BHMA A156.2) cylindrical and deadlock hardware be installed.
- **UNITS COVERED BY COP DOCUMENT 3244*, 3249, 3264* or 3269**
Compliance requires that 8" GRADE 1 (ANSI/BHMA A156.16) surface bolts be installed on latch side of active door panel - (1) at top and (1) at bottom.

*Based on required Design Pressure - see COP sheet for details.


Notes:

1. Anchor calculations have been carried out with the lowest (least) fastener rating from the different fasteners being considered for use. Fasteners analyzed for this unit include #8 and #10 wood screws or 3/16" Tapcons.
2. The wood screw single shear design values come from Table 11.3A of ANSI/AF & PA NDS for southern pine lumber with a side member thickness of 1-1/4" and achievement of minimum embedment. The 3/16" Tapcon single shear design values come from the ITW and ELCO Dade Country approvals respectively, each with minimum 1-1/4" embedment.
3. Wood bucks by others, must be anchored properly to transfer loads to the structure.




INSWING UNIT WITH SINGLE DOOR & TWO SIDELITES


TYPICAL HINGE ATTACHMENT

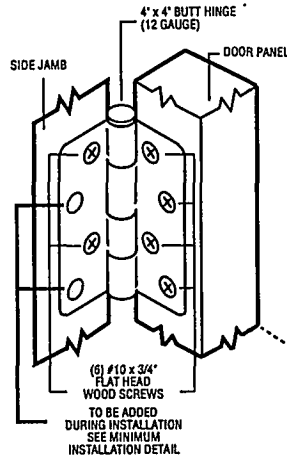


TYPICAL MULLION ATTACHMENT

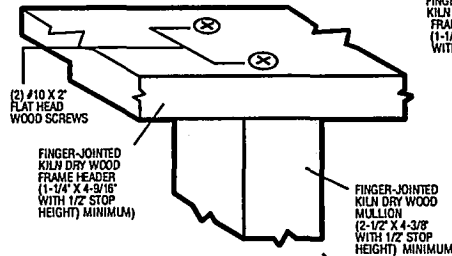


TYPICAL HEADER & SIDE JAMB ATTACHMENT

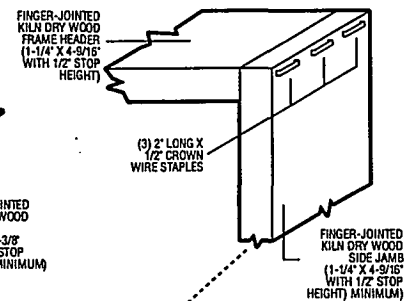


TYPICAL THRESHOLD & SIDE JAMB ATTACHMENT

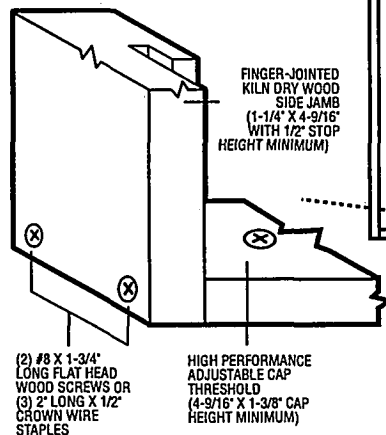


TYPICAL THRESHOLD & MULLION ATTACHMENT

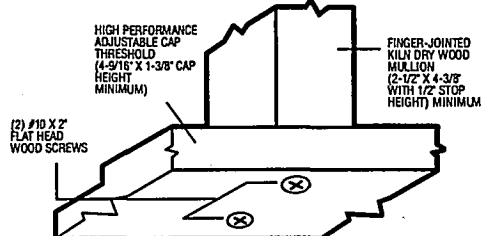

**SECTION A-A
TYPICAL SIDE JAMB &
SIDELITE PANEL
ATTACHMENT**

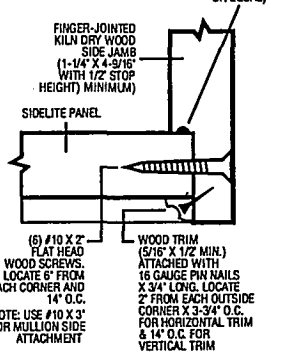

**SECTION B-B
TYPICAL THRESHOLD &
SIDELITE PANEL
ATTACHMENT**

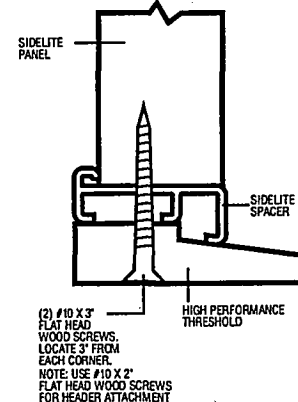

Test Data Review Certificate #3026447A; #3026447B;
#3026447C and COP/Test Report Validation Matrix
#3026447A-001, 002, 003; #3026447B-001, 002, 003;
#3026447C-001, 002, 003 provides additional
information - available from the ITSAWH website
(www.etsamko.com), the Masonite website
(www.masonite.com) or the Masonite technical center.


BUILDING CODE COMPLIANCE OFFICE
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908CONTRACTOR LICENSING SECTION
(305) 375-2527 FAX (305) 375-2558CONTRACTOR ENFORCEMENT DIVISION
(305) 375-2966 FAX (305) 375-2908PRODUCT CONTROL DIVISION
(305) 375-2902 FAX (305) 372-6339**PRODUCT CONTROL NOTICE OF ACCEPTANCE**Premdor Entry Systems
911 E. Jefferson, P.O. Box 76
Pittsburgh, KS 66762

Your application for Notice of Acceptance (NOA) of:

Entergy 6-8 S-W/E Inswing Opaque Single w/sidelites Residential Insulated Steel Door
under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

ACCEPTANCE NO.: 01-0314.18
EXPIRES: 04/02/2006
Raul Rodriguez
Chief Product Control Division**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL
CONDITIONS
BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.
Director
Miami-Dade County
Building Code Compliance OfficeAPPROVED: 06/05/2001

Premdor Entry SystemsACCEPTANCE No.: 01-0314.18APPROVED : JUN 05 2001EXPIRES : April 02, 2006NOTICE OF ACCEPTANCE: SPECIFIC CONDITIONS**1. SCOPE**

- 1.1 This renews the Notice of Acceptance No. 00-0321.20 which was issued on April 28, 2000. It approves a residential insulated door, as described in Section 2 of this Notice of Acceptance, designed to comply with the South Florida Building Code (SFBC), 1994 Edition for Miami-Dade County, for the locations where the pressure requirements, as determined by SFBC Chapter 23, do not exceed the Design Pressure Rating values indicated in the approved drawings.

2. PRODUCT DESCRIPTION

- 2.1 The Series Entergy 6-8 S-W/E Inswing Opaque Single Residential Insulated Steel Door with Sidelites- Impact Resistant Door Slab Only and its components shall be constructed in strict compliance with the following documents: Drawing No 31-1020-EW-I, Sheets 1 through 6 of 6, titled "Premdor (Entergy Brand) Wood Edge Single Door in Wood Frames with a Bumper Threshold (Inswing)," prepared by manufacturer, dated 7/29/97 with revision C dated 01/15/01, bearing the Miami-Dade County Product Control approval stamp with the Notice of Acceptance number and approval date by the Miami-Dade County Product Control Division. These documents shall hereinafter be referred to as the approved drawings.

3. LIMITATIONS

- 3.1 This approval applies to single unit applications of single door only, as shown in approved drawings.
- 3.2 Unit shall be installed only at locations protected by a canopy or overhang such that the angle between the edge of canopy or overhang to sill is less than 45 degrees. Unless unit is installed in non-habitable areas where the unit and the area are designed to accept water infiltration.

4. INSTALLATION


- 4.1 The residential insulated steel door and its components shall be installed in strict compliance with the approved drawings.
- 4.2 Hurricane protection system (shutters):
- 4.2.1 Door: the installation of this unit will not require a hurricane protection system.
- 4.2.2 Sidelite: the installation of this unit will require a hurricane protection system.

5. LABELING

- 5.1 Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved".

6. BUILDING PERMIT REQUIREMENTS

- 6.1 Application for building permit shall be accompanied by copies of the following:
- 6.1.1 This Notice of Acceptance
- 6.1.2 Duplicate copies of the approved drawings, as identified in Section 2 of this Notice of Acceptance, clearly marked to show the components selected for the proposed installation.
- 6.1.3 Any other documents required by the Building Official or the South Florida Building Code (SFBC) in order to properly evaluate the installation of this system.

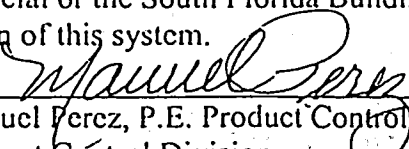
 Manuel Perez, P.E. Product Control Examiner
 Product Control Division

Premdor Entry Systems

20
ACCEPTANCE No.: 01-0314.18


APPROVED : JUN 05 2001

EXPIRES : April 02, 2006


NOTICE OF ACCEPTANCE: STANDARD CONDITIONS

1. Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
2. Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
3. Renewals of Acceptance will not be considered if:
 - a. There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes.
 - b. The product is no longer the same product (identical) as the one originally approved.
 - c. If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product.
 - d. The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
4. Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
5. Any of the following shall also be grounds for removal of this Acceptance:
 - a. Unsatisfactory performance of this product or process.
 - b. Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
6. The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
7. A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all time. The engineer needs not rescal the copies.
8. Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
9. This Notice of Acceptance consists of pages 1, 2 and this last page 3.

END OF THIS ACCEPTANCE

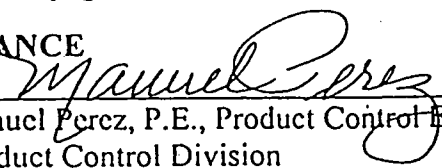
Manuel Perez, P.E., Product Control Examiner
Product Control Division

PREMDOR (ENTERGY BRAND) WOOD EDGE SINGLE DOOR WITH SIDELITES IN WOOD FRAME WITH BUMPER THRESHOLD (INSWING)

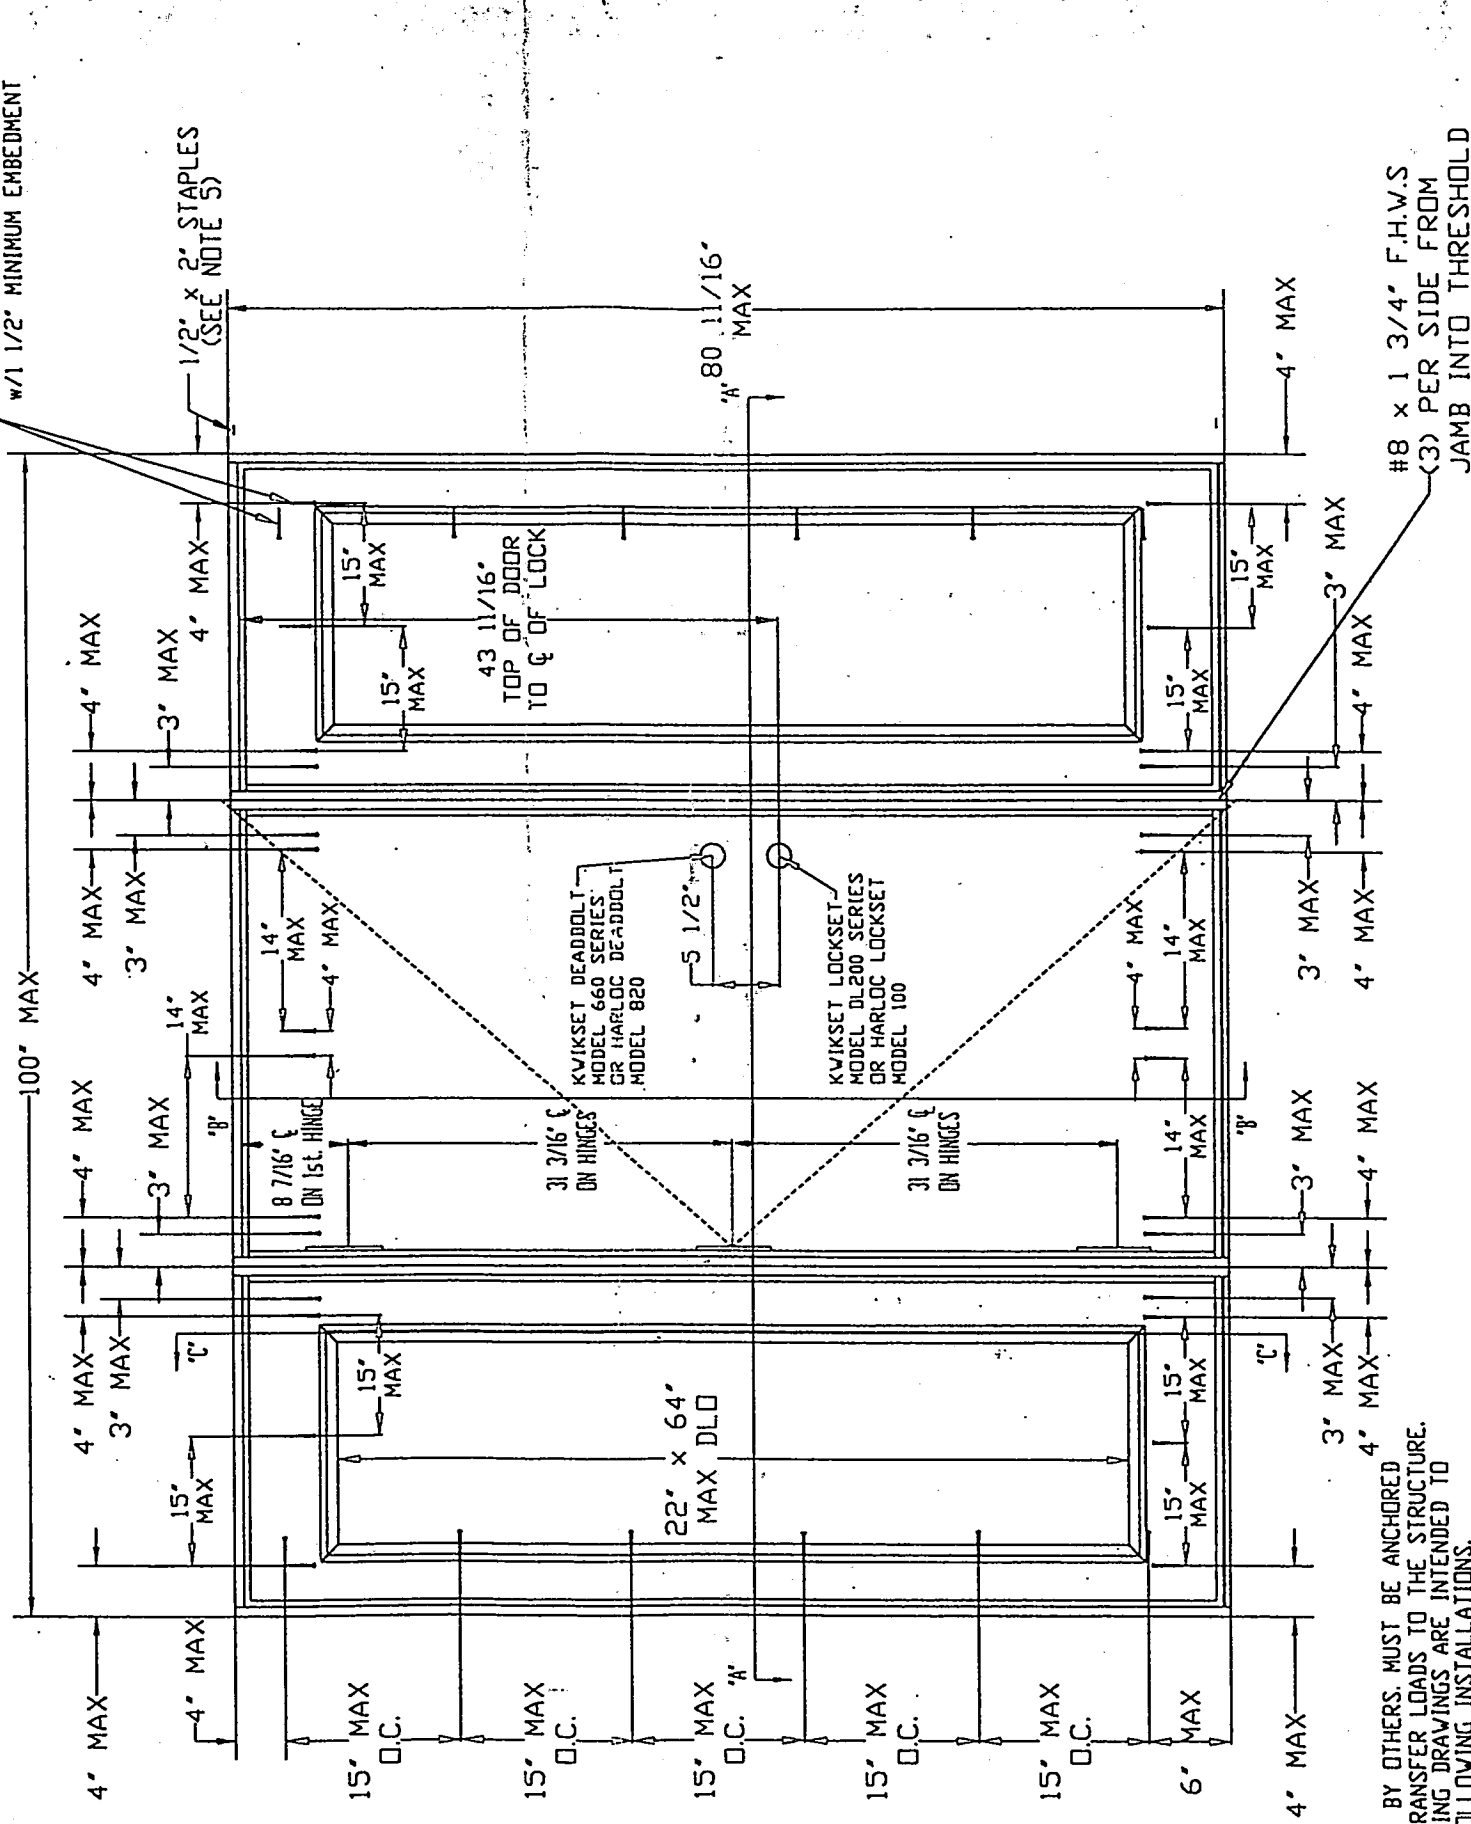

NOTES:

1.) WOOD BUCKS BY OTHERS MUST BE ANCHORED PROPERLY TO TRANSFER LOADS TO THE STRUCTURE.
2.) THE PRECEDING DRAWINGS ARE INTENDED TO QUALIFY THE FOLLOWING INSTALLATIONS.

A. WOOD FRAME CONSTRUCTION WHERE DOOR SYSTEM IS ANCHORED TO A MINIMUM TWO BY WOOD OPENING.

B. MASONRY OR CONCRETE CONSTRUCTION WHERE DOOR SYSTEM IS ANCHORED TO A MINIMUM TWO BY STRUCTURAL WOOD BUCK.

C. MASONRY OR CONCRETE CONSTRUCTION WHERE DOOR SYSTEM IS ANCHORED DIRECTLY TO CONCRETE OR MASONRY WITH OR WITHOUT A NON-STRUCTURAL ONE BY WOOD BUCK.

3. ALL ANCHORING SCREWS TO BE #10 WITH MINIMUM 1 1/2\"

4. UNIT MUST BE INSTALLED WITH \"MIAMI-DADE COUNTY APPROVED\" SHUTTERS

5. THREE STAPLES PER SIDE JAMB INTO HEADER ON SIDELITES AND DOOR, THREE STAPLES PER JAMB INTO BASE ON SIDELITES.

6. LATEX SEALANT TO BE APPLIED AT SIDE BY SIDE JAMBS AND SIDELITES.

7. DOOR/SIDELITE HEADER, DOOR/SIDELITE JAMBS, AND SIDELITE BASE CORNERS ARE COPED AND BUTT JOINED.

8. DOORS SHALL BE PRE-PAINTED WITH A WATER-BASED EPOXY RUST INHIBITIVE PRIMER PAINT WITH A DRY FILM THICKNESS OF 0.8 TO 1.2 MIL.

9. FRAMES SHALL BE PRE-PAINTED WITH AN ACRYLIC LATEX WATER-BASED/ WATER-REDUCIBLE WHITE PRIMER WITH A DRY FILM THICKNESS OF 0.8 TO 1.2 MIL.

DESIGN PRESSURE RATINGS		
WHERE WATER INFILTRATION REQUIREMENT IS NEEDED *	WHERE WATER INFILTRATION REQUIREMENT IS NOT NEEDED	
Positive	NOT APPROVED *	+67.0 psf
Negative	NOT APPROVED *	-67.0 psf

* UNITS SHALL BE INSTALLED ONLY AT LOCATIONS PROTECTED BY A CANOPY OR OVERHANG SUCH THAT THE ANGLE BETWEEN THE EDGE OF CANOPY OR OVERHANG TO SILL IS LESS THAN 45 DEGREES. UNLESS UNIT IS INSTALLED IN NON-HABITABLE AREAS WHERE THE UNIT AND THE AREA ARE DESIGNED TO ACCEPT WATER INFILTRATION.

R.H. INSWING L.H. INSWING

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE **JUN 05 2003**


BY *Manuel...*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314,18

DATE	DESCRIPTION	BY	DATE
01-0314,18	REVISIONS	MANUEL...	01-0314,18
01-0314,18	REVISIONS	MANUEL...	01-0314,18
01-0314,18	REVISIONS	MANUEL...	01-0314,18

DATE	DESCRIPTION	BY	DATE
01-0314,18	REVISIONS	MANUEL...	01-0314,18
01-0314,18	REVISIONS	MANUEL...	01-0314,18
01-0314,18	REVISIONS	MANUEL...	01-0314,18

DATE	DESCRIPTION	BY	DATE
01-0314,18	REVISIONS	MANUEL...	01-0314,18
01-0314,18	REVISIONS	MANUEL...	01-0314,18
01-0314,18	REVISIONS	MANUEL...	01-0314,18



DATE	DESCRIPTION	BY	DATE
01-0314,18	REVISIONS	MANUEL...	01-0314,18
01-0314,18	REVISIONS	MANUEL...	01-0314,18
01-0314,18	REVISIONS	MANUEL...	01-0314,18

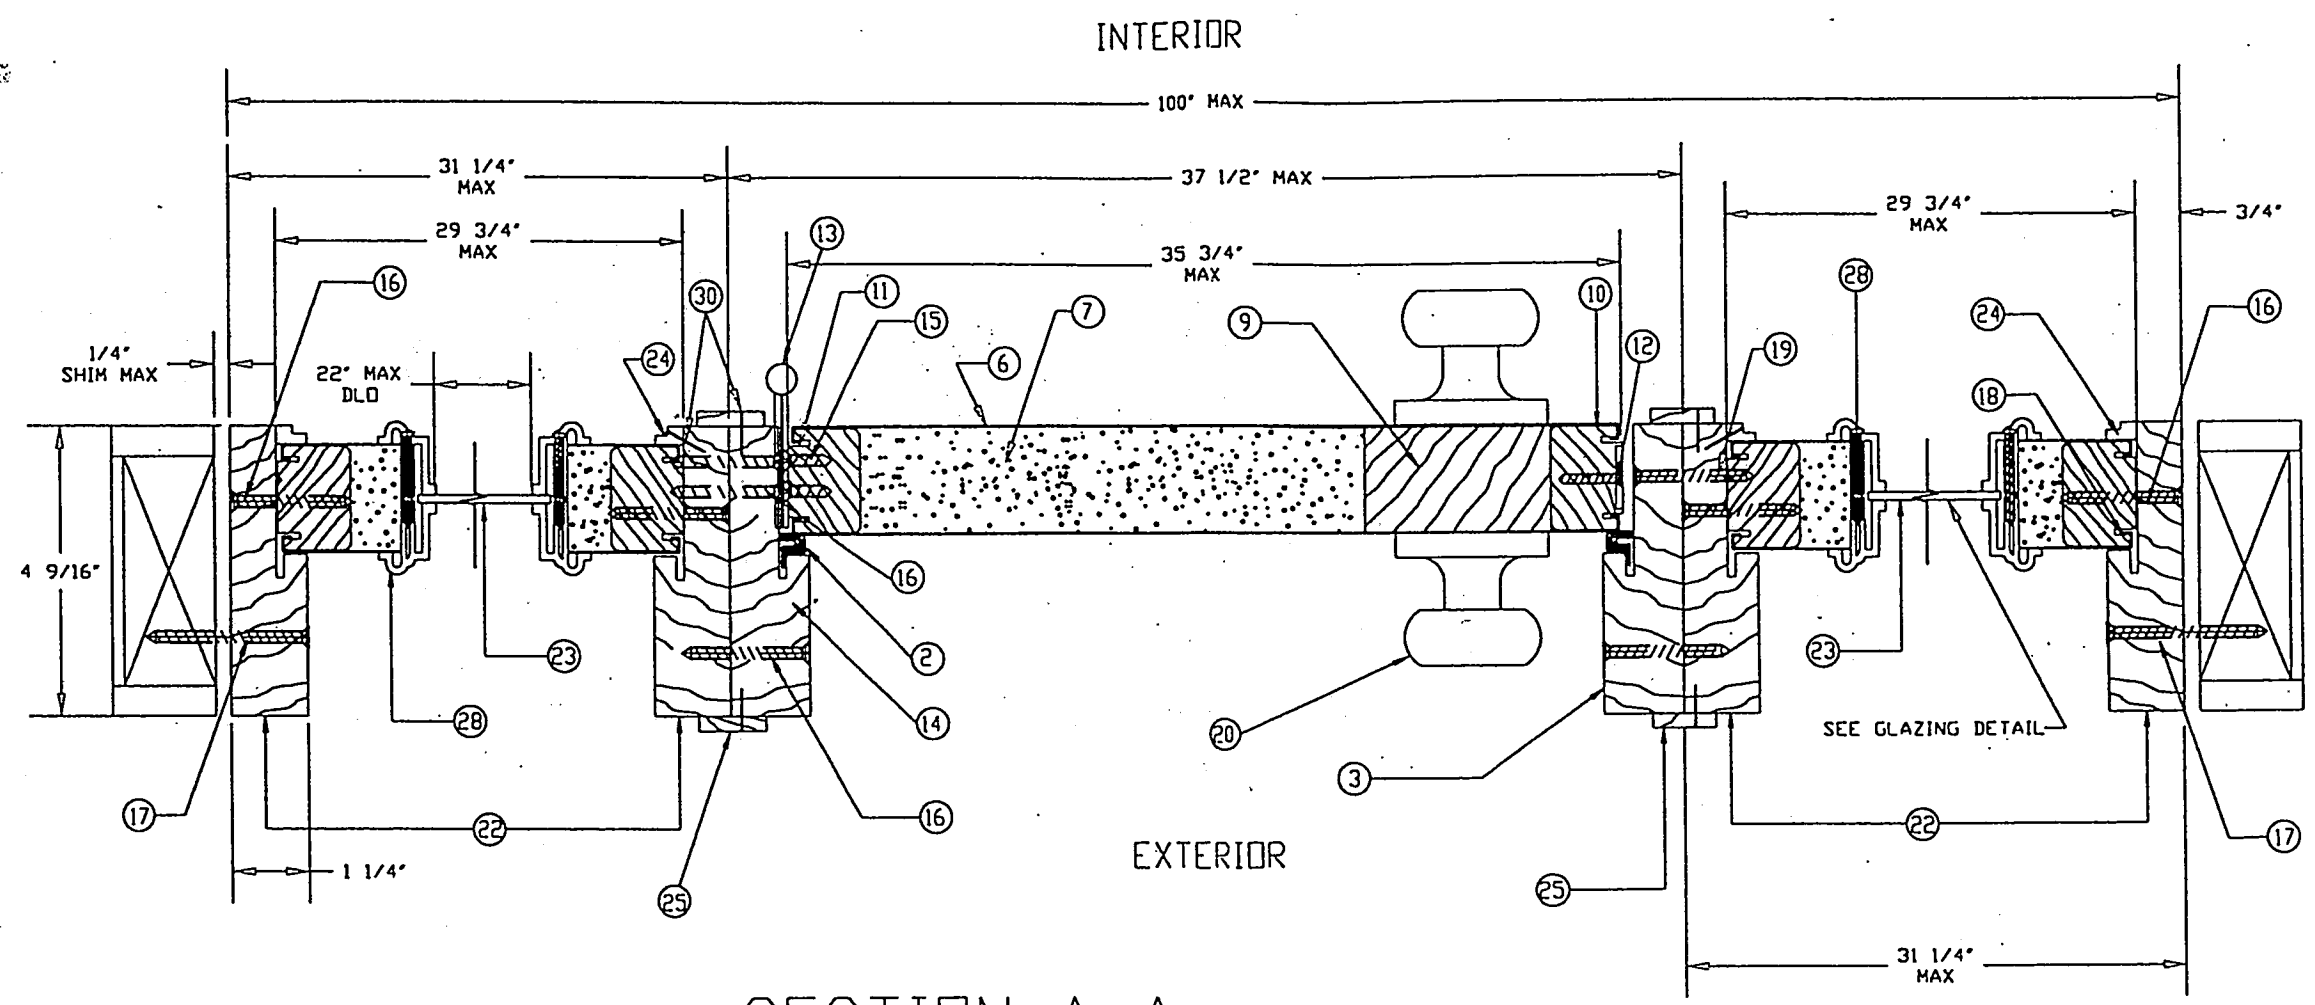

SECTION A-A
INSWING

OTHER CONFIGURATIONS


GLAZING DETAIL

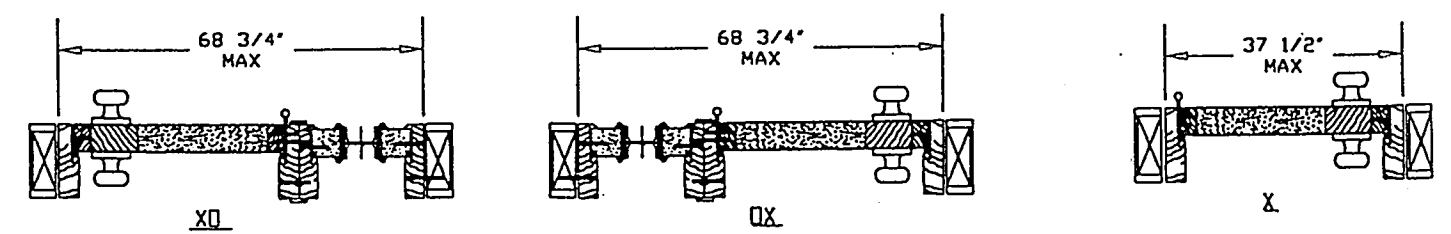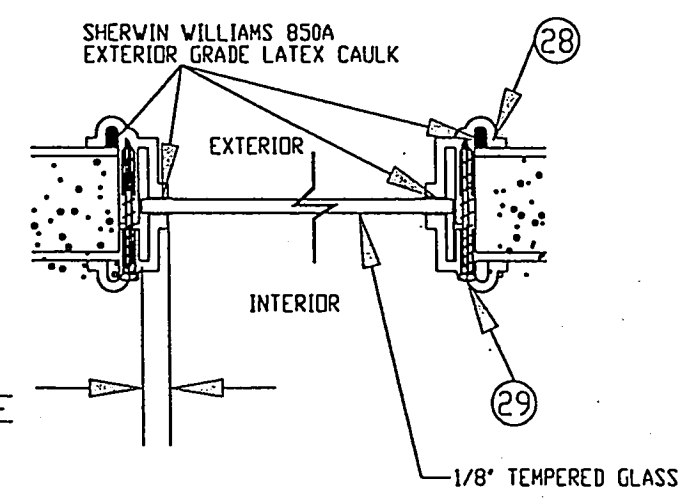

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE **JUN 05 2001**
BY *Manuel Lopez*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. _____

LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :
EXTRUSIONS: UNLESS NOTED, STD. COMPL. TOL'S
ENGINEER: _____
DR. BY R.S. DATE 7-29-97
PREDDOR ENTRY SYSTEMS
911 E. JEFFERSON
PITTSBURGH, PA 15212

C	DADE COUNTY MODIFICATIONS	7/11/01
B	ADDED PAGE 5 (DOOR OPTIONS)	10-1-98
A	ADD SCREWS TO LITE FRAMES & ADD OTHER DOOR CONFIGURATIONS	2-10-97
LTR	REVISIONS	DATE
PART NAME: ENERGY DOOR W/SIDELITES (A-A)		SCALE: NTS
31-1020-EW-I		SHEET 2 OF 6
REVISION LETTER		C

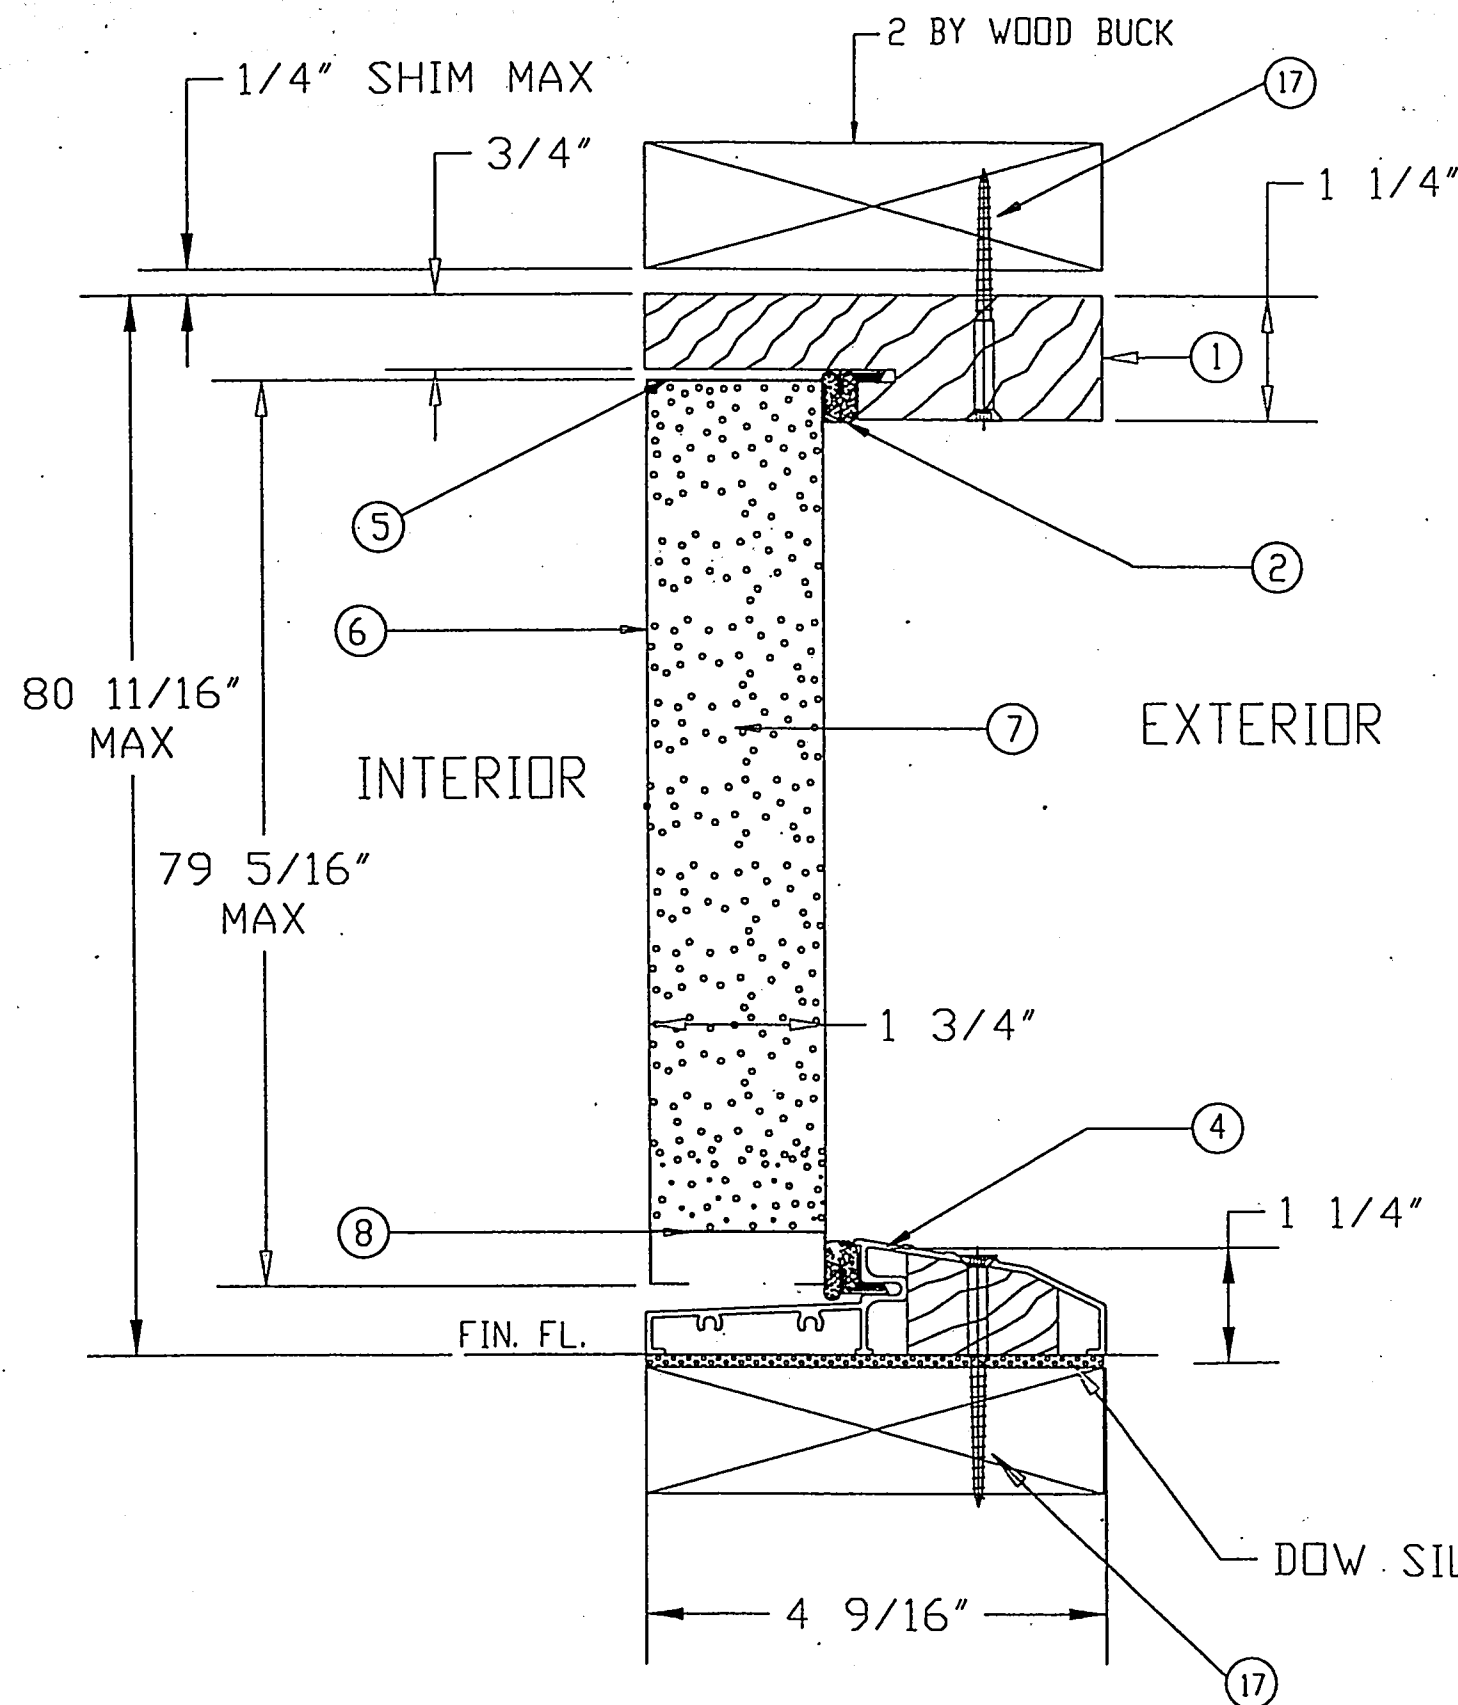

SECTION B-B


APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2001
BY Manuel Perez
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314.18

MATERIALS LIST

ITEM NO.	DESCRIPTION	PART NUMBER	COMMENTS
①	WOOD HEAD JAMB	EW-12	1 1/4' X 4 9/16' MTL. TO BE PINE OR EQUIVALENT
②	COMPRESSION WEATHERSTRIP	EW-14	LOCKSCREEN BRAND LOXSEAL 9650 (BRONZE)
③	WOOD STRIKE JAMB	EW-10	1 1/4' X 4 9/16' MTL. TO BE PINE OR EQUIVALENT
④	ALUMINUM-BUMPER THRESHOLD	EW-13	PREMDOR BRAND OR EQUIVALENT - 1 1/4' x 4 9/16'
⑤	TOP CHANNEL	EW-05	PREMDOR BRAND - 1 11/16' - 20 GA STEEL
⑥	STEEL SKIN	26 ga. (.017 +.004 -.000)	MIN. YIELD STRENGTH 31,000 PSI MIN. THICKNESS PER TENSILE TEST REPORT IS .021"
⑦	POLYURETHANE FOAM CORE	BASF FOAM - DENSITY 2.0 TO 2.5 lbs./ft ³	
⑧	BOTTOM CHANNEL	EW-04	PREMDOR BRAND - 1 11/16' - 20 GA STEEL
⑨	WOOD LOCK BLOCK	EW-08	4' X 9 1/2' MTL. TO BE PINE OR EQUIVALENT
⑩	STRIKE STILE	EW-07	15/16' X 1 11/16' MTL. TO BE PINE OR EQUIVALENT
⑪	HINGE STILE	EW-06	15/16' X 1 11/16' MTL. TO BE PINE OR EQUIVALENT
⑫	LOCK PREP FILLER PLATE	EW-09	PREMDOR BRAND - .050" THICK- MTL. TO BE POLYETHYLENE
⑬	4"x4" HINGE	EW-15	HAGER BRAND HINGE OR EQUIVALENT - .097 THICK (STEEL)
⑭	WOOD HINGE JAMB	EW-11	1 1/4' X 4 9/16' MTL. TO BE PINE OR EQUIVALENT
⑮	#10 x 3/4" F.H.W.S.		(4) SCREWS PER HINGE INTO DOOR
⑯	#10 X 2" F.H.W.S.		(5) SCREWS THROUGH HINGE JAMB INTO SIDELITE JAMB, 8" DOWN FROM TOP, MAX 18" O.C. THEREAFTER (10) SCREWS THROUGH STRIKE JAMB INTO SIDELITE JAMB, 4" DOWN FROM TOP, MAX 8" O.C. THEREAFTER (4) SCREWS THROUGH EACH HINGE INTO DOOR JAMB (6) SCREWS THROUGH EACH SIDELITE JAMB INTO SIDELITE, 4" DOWN FROM TOP, MAX 15" O.C. THEREAFTER
⑰	#10 F.H.W.S. V/MINIMUM 1 1/2" EMBEDMENT OR 3/16" PFH TAPCONS V/MINIMUM 1 1/2" EMBEDMENT		REFER TO ELEVATION VIEW, FOR # OF SCREWS USED AND LOCATION
⑱	SIDELITE WOOD STILE	EW-07	15/16' X 1 11/16' MTL. TO BE PINE OR EQUIVALENT
⑲	#8 x 2" F.H.W.S.		(2) SCREWS AT EACH STRIKE PLATE
⑳	LOCKSET		KWIKSET BRAND 200 LOCK OR HARLOC BRAND 100 LOCK
㉑	NOT USED ON THIS MODEL		
㉒	WOOD SIDELITE JAMB	EW-18	1 1/4' X 4 9/16' MTL. TO BE PINE OR EQUIVALENT
㉓	22' X 64' SINGLE PANEL GLASS	EW-19	TEMPERED GLASS IN POLYPROPYLENE FRAME- DC-1643 - (ODL-2) 1/8" CLEAR TEMPERED GLASS
㉔	SIDELITE TRIM (WOOD)	EW-20	5/16 x 1/2" MTL. TO BE PINE OR EQUIVALENT
㉕	WOOD CASING	EW-21	1/8" x 1" MTL. TO BE PINE OR EQUIVALENT - ITEMS ARE MOLDINGS USED FOR "SIDE BY SIDE JAMBS" AS MULLIONS
㉖	WOOD SIDELITE HEAD JAMB	EW-22	1 1/4' X 4 9/16' MTL. TO BE PINE OR EQUIVALENT
㉗	WOOD SIDELITE BASE	EW-23	1 1/4' X 4 9/16' MTL. TO BE PINE OR EQUIVALENT
㉘	POLYPROPYLENE LITE FRAME	DC-1643, ODL-2	HP Polypropylene by ODL
㉙	#6 X 1 1/2" PAN HEAD SCREWS		18 PER FRAME SCREW SPACING TO BE 3" IN FROM EACH CORNER AND NOT TO EXCEED 14" O.C. THEREAFTER.
㉚	PIN NAIL		3/4" LONG NAIL, 4" IN FROM END, MAX 8" O.C. THEREAFTER, USED ON MULLIONS AND TRIM

DOW SILICONE #995

LIMITS: UNLESS NOTED, FRAC. :	DEC. :	ANG. :	B	DADE COUNTY MODIFICATIONS	1/11/01	JD
EXTRUSIONS: UNLESS NOTED, STD. COM'L. TOL'S.			A	ADDED PAGE 5 (DOOR OPTIONS)	10-1-98	RS
ENGINEER:			LTR.	REVISIONS	DATE	BY
DR. BY R.S.	DATE 7-29-97			PART NAME: ENTERGY WOOD EDGE DOOR (B-B)		
				MAT'L:	SCALE:	
PREMDOR ENTRY SYSTEMS				31-1020-EW-I		
911 E. JEFFERSON PITTSBURG, KS. 66762				SHEET 3 OF 6		
				REVISION LETTER . B		

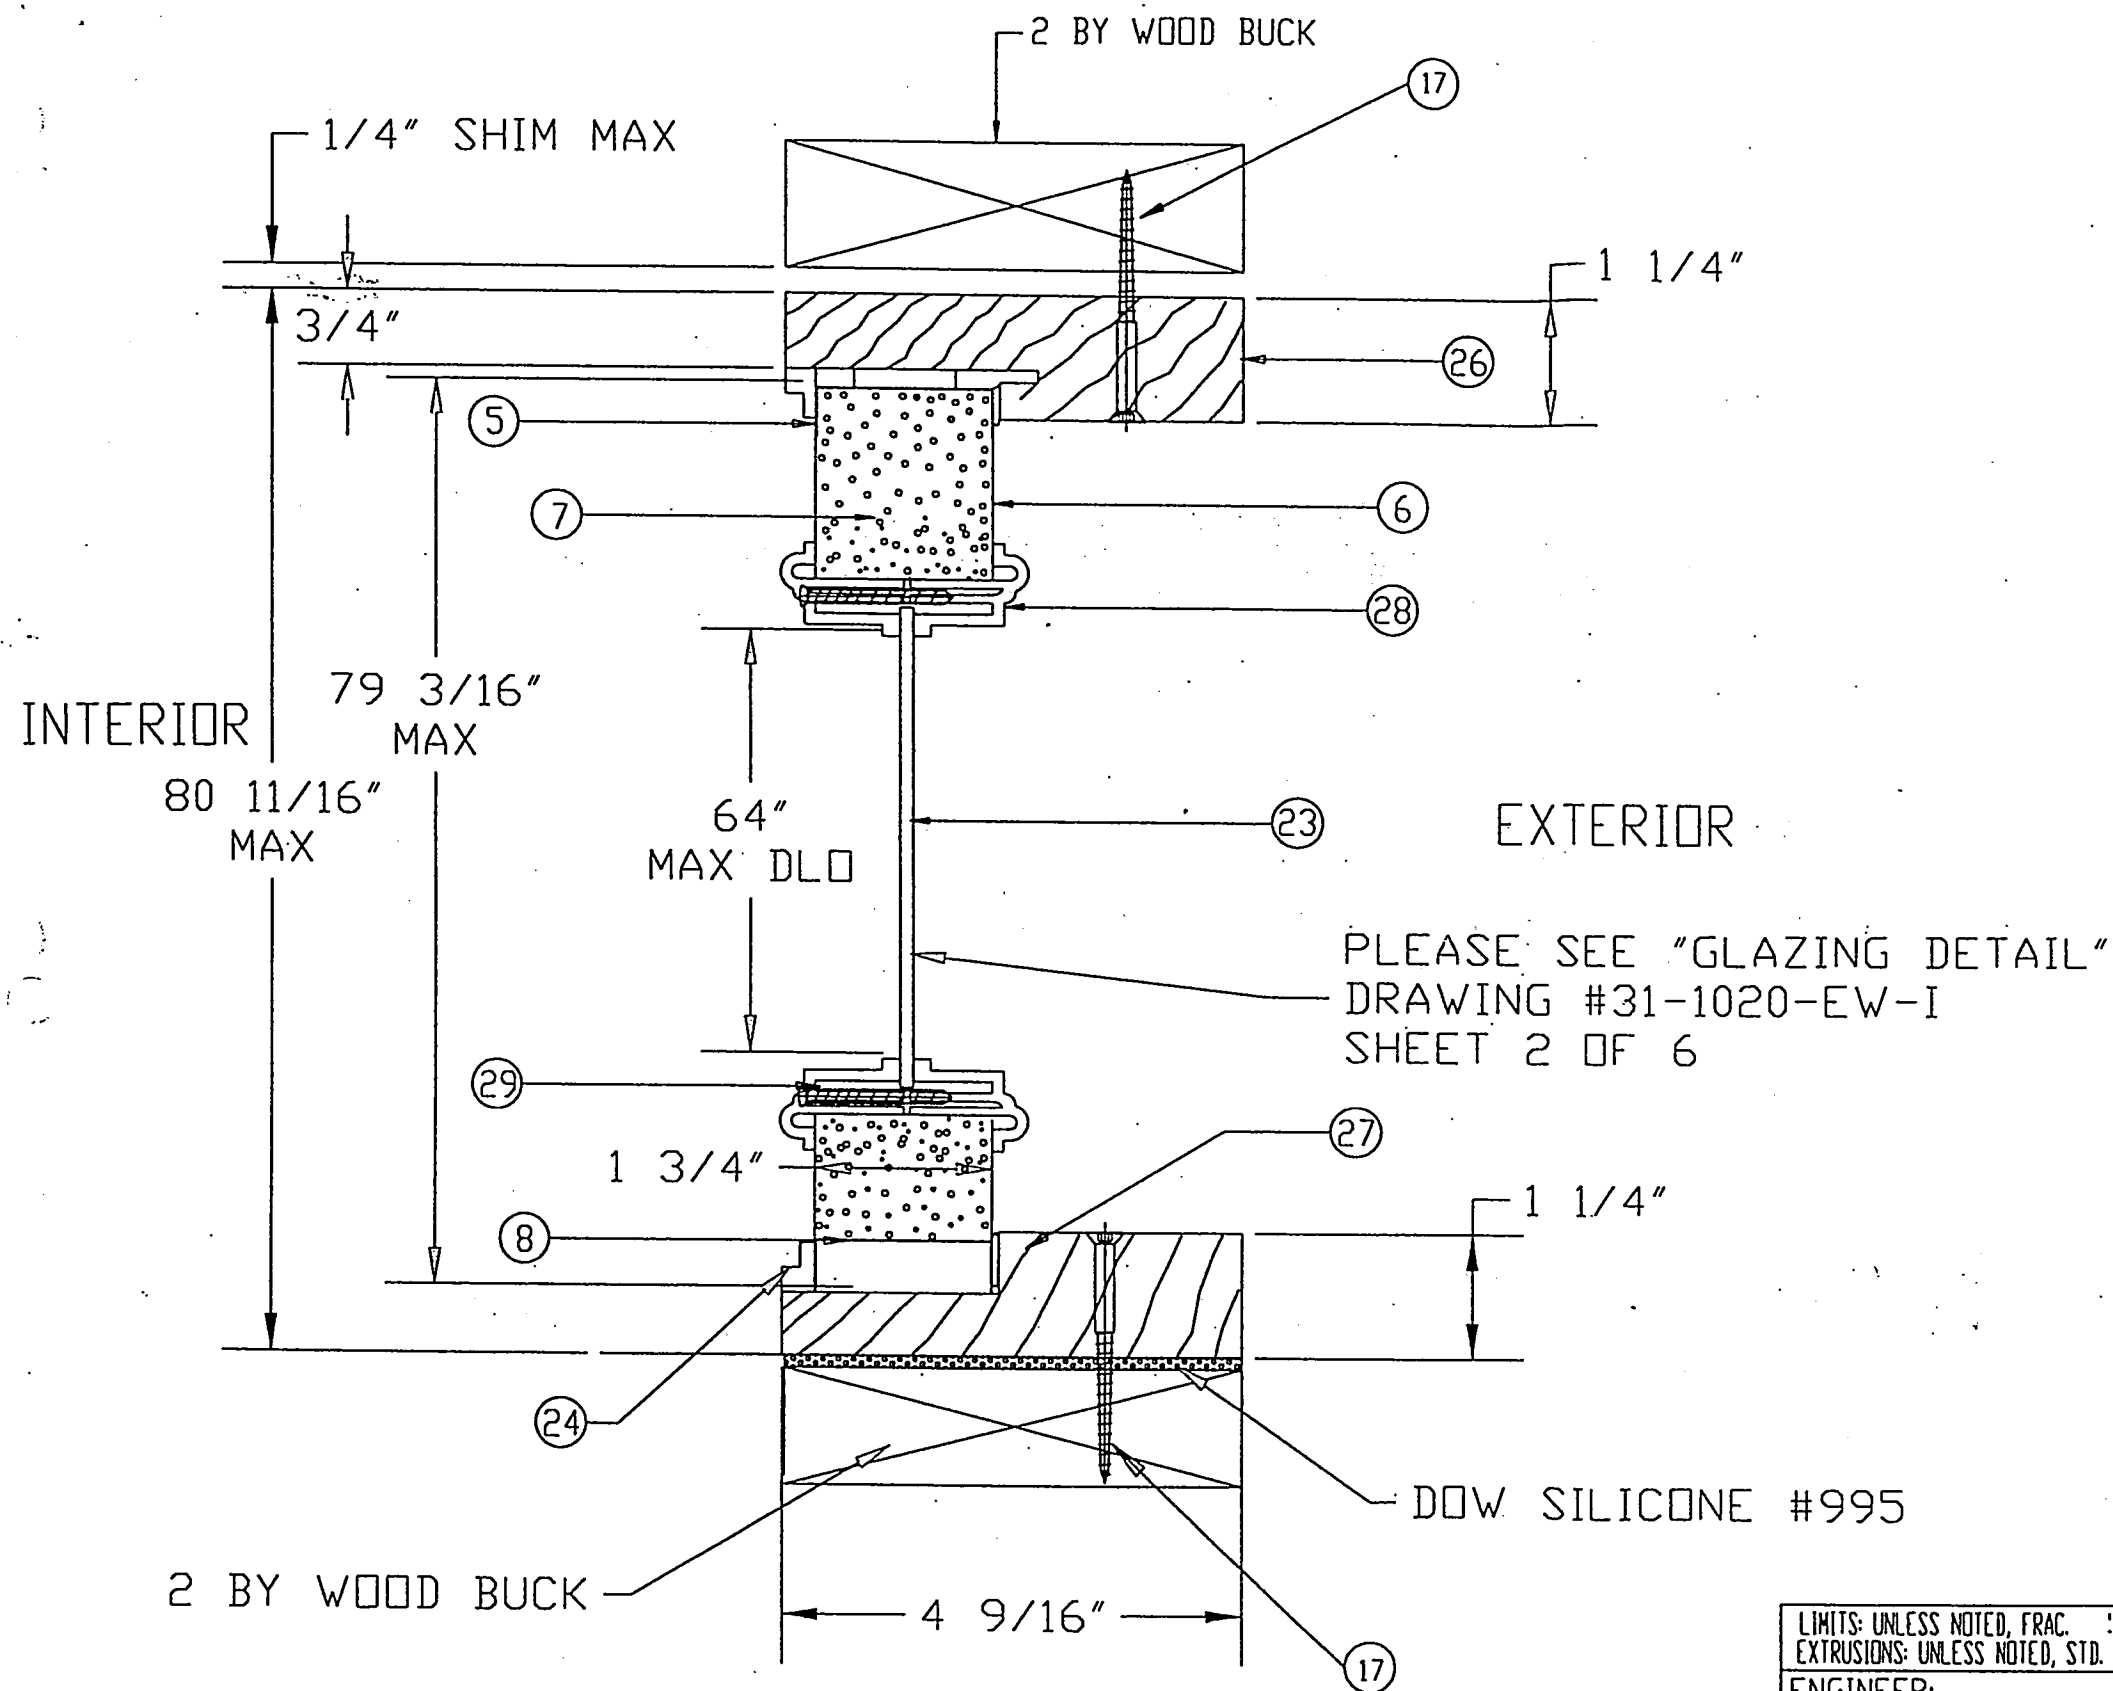

SECTION C-C

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE **JUN 05 2001**
BY *[Signature]*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. **01-0314.18**

LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :
EXTRUSIONS: UNLESS NOTED, STD. COM'L. TOL'S.

ENGINEER:

DR. BY R.S. DATE 7-29-97

PREMDOR ENTRY SYSTEMS
911 E. JEFFERSON
PITTSBURG, KS. 66762


D	DADE COUNTY MODIFICATIONS	1/11/01	JD
C	MATERIAL WAS POLYSTYRENE	6-2-99	RS
B	ADDED PAGE 5 (DOOR OPTIONS)	10-1-98	RS
A	ADD SCREWS TO LITE FRAME & MATERIAL LIST	12-18-97	R.S.
LTR.	REVISIONS	DATE	BY

PART NAME: ENTERGY WOOD EDGE SIDELITE (C-C)
MAT'L: SCALE:


31-1020-EW-I
SHEET 4 OF 6

REVISION LETTER D


OTHER DOOR CONFIGURATIONS

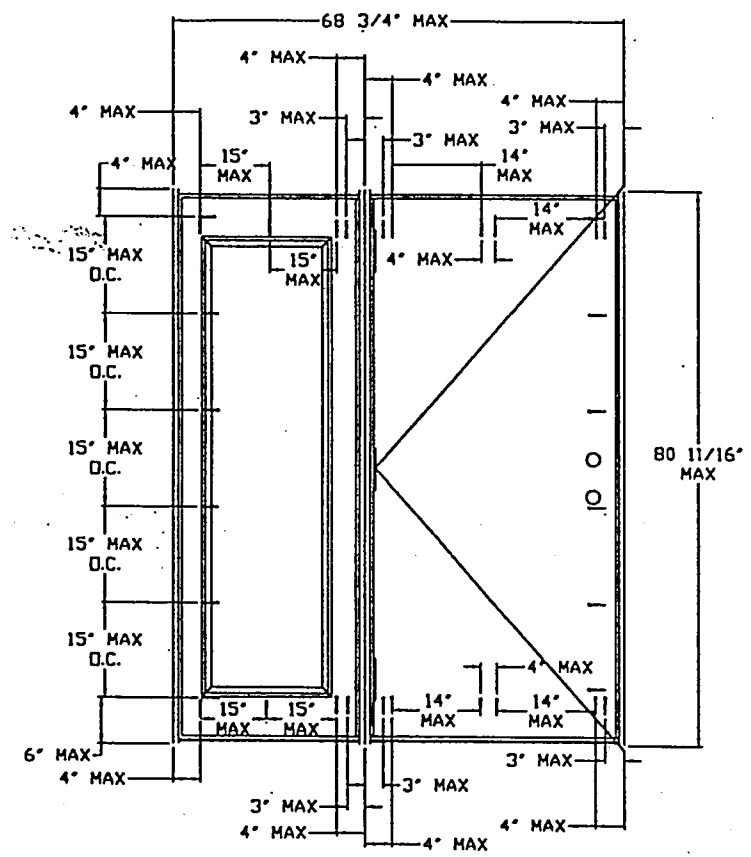


OX

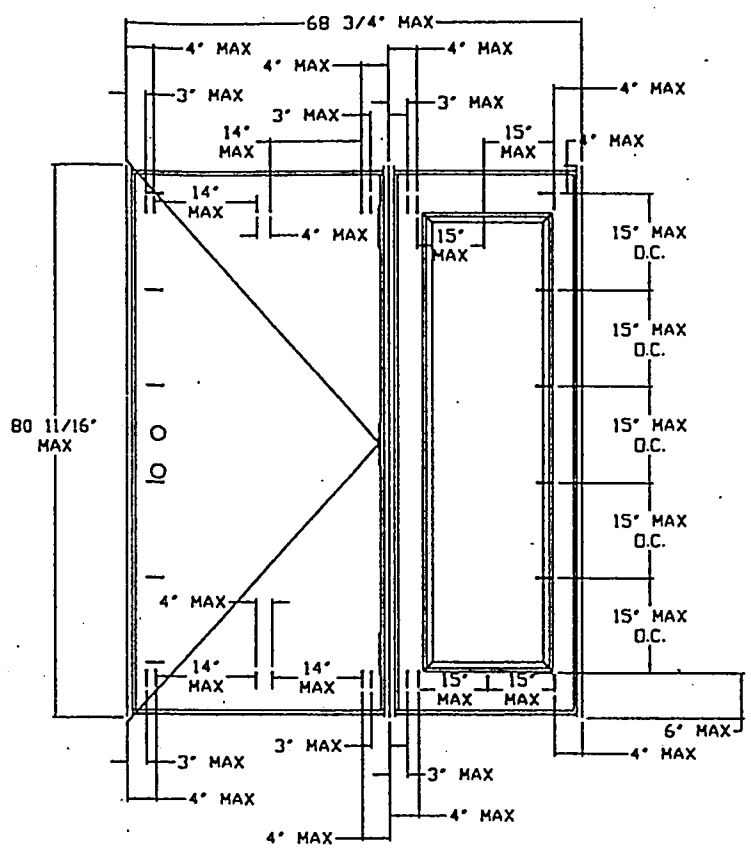

XO

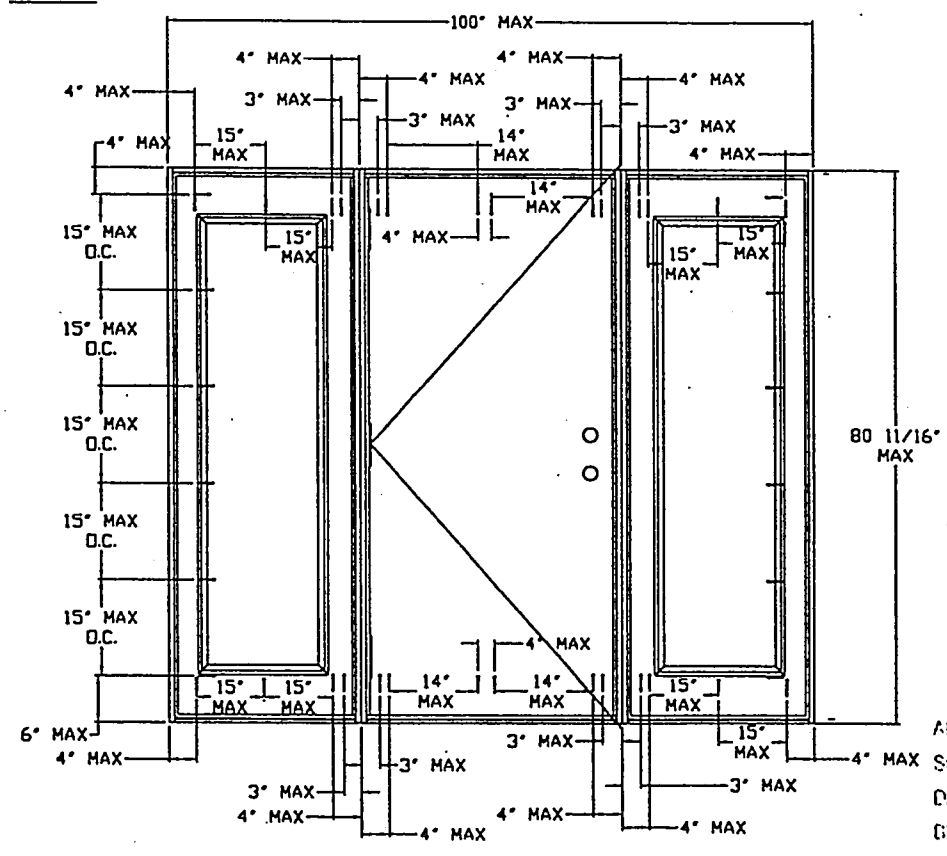

OXO

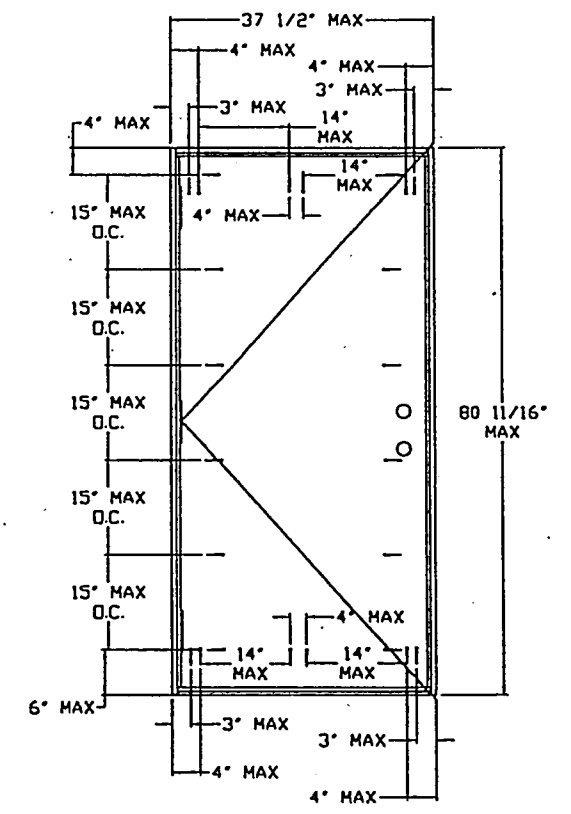


X



ALL SHOWN AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2004
BY *Matthew*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO 01-0314.18

LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :				
EXTRUSIONS: UNLESS NOTED, STD. COM'L. TOL'S.				
ENGINEER:	LTR.	REVISIONS	DATE	RY
DR. BY J.D.	DATE 1-11-01	PART NAME:	MAT'L:	SCALE:
PREMDOR ENTRY SYSTEMS				
911 E. JEFFERSON				
PITTSBURG, KS. 66762				
31-1020-EW-I				REVISION LETTER
SHEET 5 OF 6				

OTHER DOOR PANEL STYLES

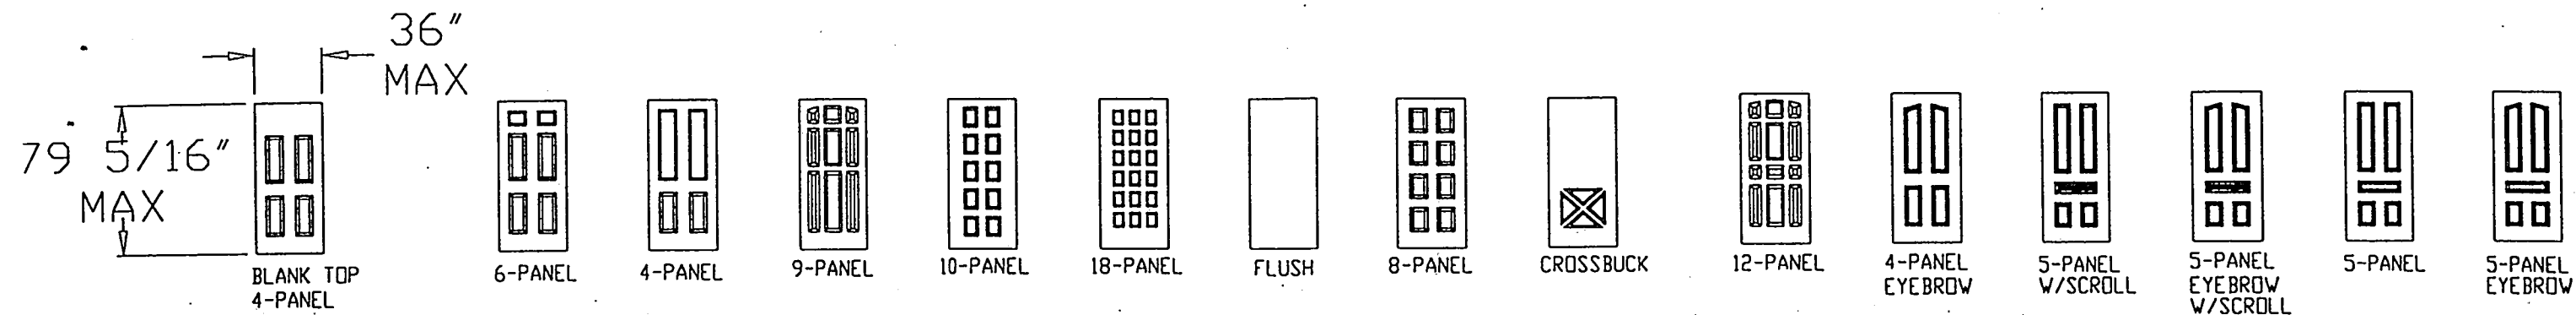

OTHER SIDELITE STYLES

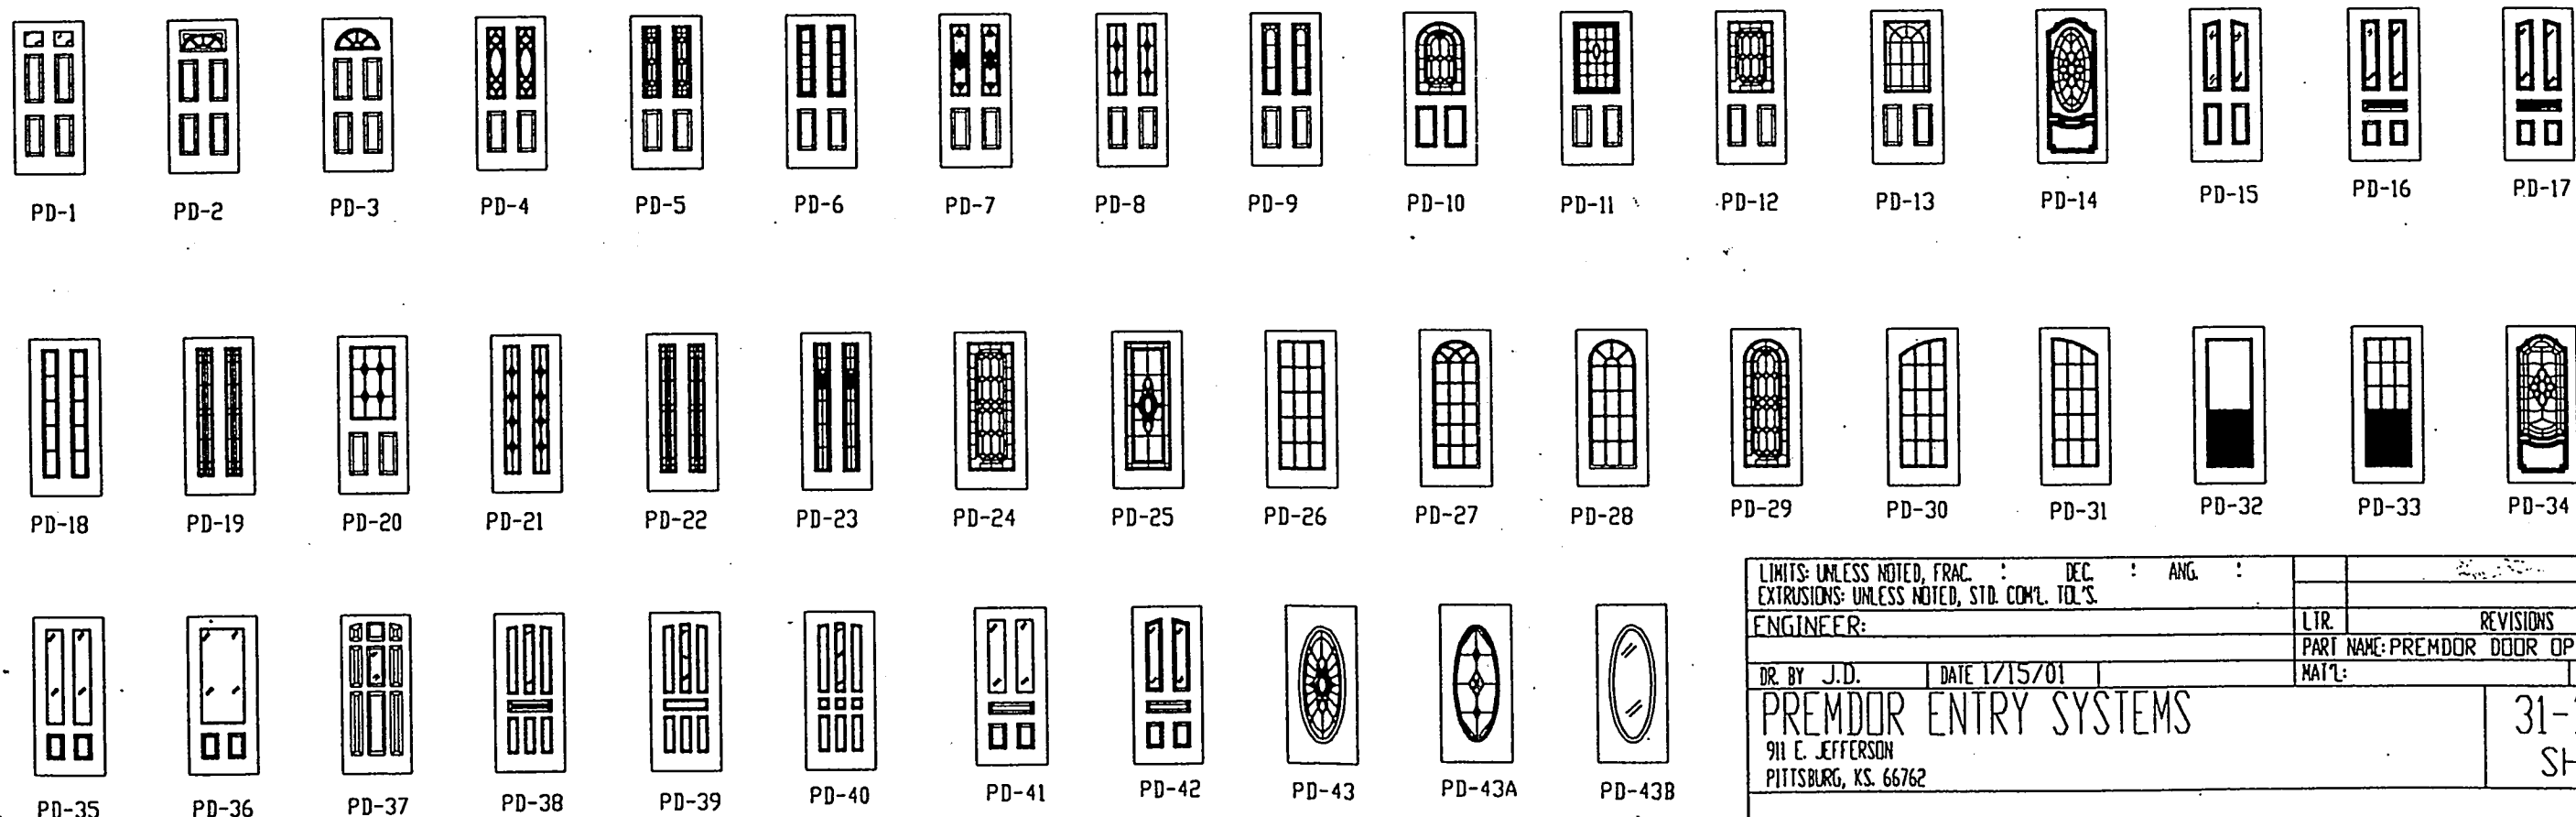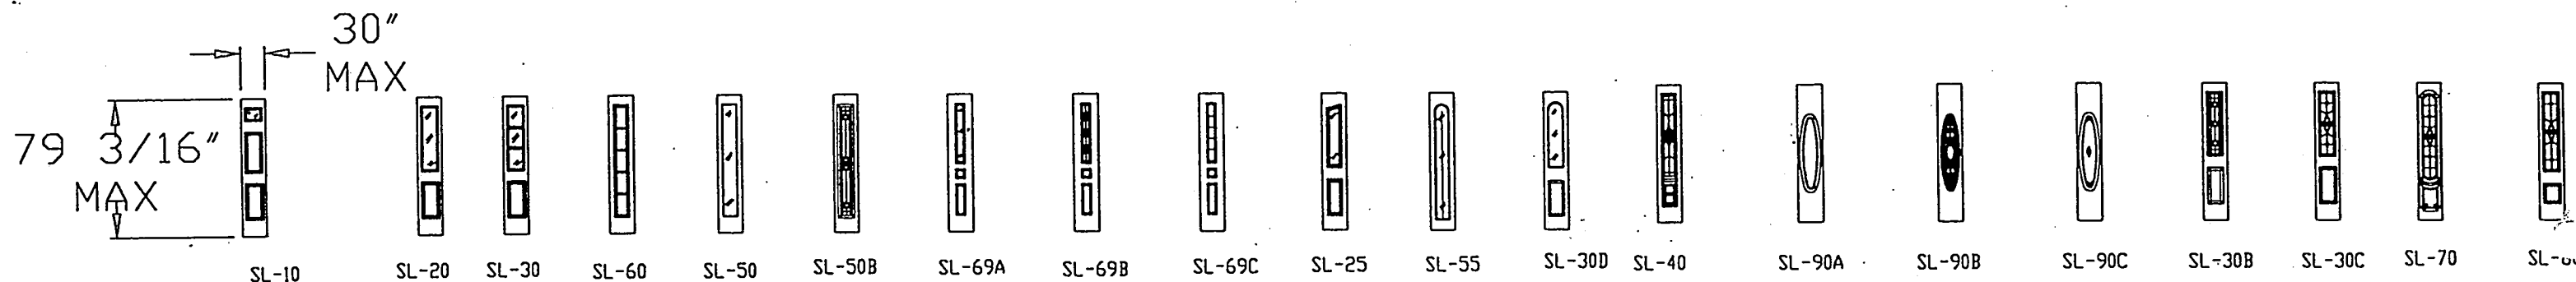


APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2001
BY *Manuel Perez*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314-18

LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :			
EXTRUSIONS: UNLESS NOTED, STD. COM'L. TOL'S			
ENGINEER:	LTR.	REVISIONS	DATE BY
DR. BY J.D. DATE 1/15/01		PART NAME: PREMDOR DOOR OPTIONS	
PITTSBURG, KS. 66762		SCALE:	
PREMDOR ENTRY SYSTEMS		31-1020-EW-I	
SHEET 6 OF 6		REVISION LETTER	

XX

Glazed Outswing Unit

COP-WL-EN4162-02**WOOD-EDGE STEEL DOORS****APPROVED ARRANGEMENT:**

Test Data Review Certificate #3026447C and COP/Test Report Validation Matrix #3026447C-001 provides additional information - available from the ITS/WH website (www.ettsemko.com), the Masonite website (www.masonite.com) or the Masonite technical center.

Note:

Units of other sizes are covered by this report as long as the panels used do not exceed 3'0" x 6'8".

Double Door
Maximum unit size = 6'0" x 6'8"

Design Pressure**+50.5/-50.5**

Limited water unless special threshold design is used.

Large Missile Impact Resistance

Hurricane protective system (shutters) is REQUIRED.


Actual design pressure and impact resistant requirements for a specific building design and geographic location is determined by ASCE 7-national, state or local building codes specify the edition required.

MINIMUM ASSEMBLY DETAIL:

Compliance requires that minimum assembly details have been followed – see MAD-WL-MA0012-02 and MAD-WL-MA0041-02.

MINIMUM INSTALLATION DETAIL:

Compliance requires that minimum installation details have been followed – see MID-WL-MA0002-02.

APPROVED DOOR STYLES:**1/4 GLASS:**

100 Series



133, 135 Series




136 Series



680 Series



822 Series

1/2 GLASS:

105 Series*




106, 160 Series*




129 Series*



200 Series*



12 R/L, 23 R/L, 24 R/L Series*



107 Series*



108 Series



304 Series

*This glass kit may also be used in the following door styles: 5-panel; 5-panel with scroll; Eyebrow 5-panel; Eyebrow 5-panel with scroll.

1

Entergy
Entry Systems

June 17, 2002
Our continuing program of product improvement makes specifications, design and product detail subject to change without notice.



Exclusively from

Masonite International Corporation

XX

Glazed Outswing Unit

COP-WL-EN4162-02**WOOD-EDGE STEEL DOORS****APPROVED DOOR STYLES:****3/4 GLASS:**

404 Series



410 Series



450 Series

FULL GLASS:


109 Series

114, 120, 122
Series

152 Series



149 Series



300 Series

CERTIFIED TEST REPORTS:

NCTL 210-1897-7, 8, 9

Certifying Engineer and License Number: Barry D. Portney, P.E. / 16258.

Unit Tested in Accordance with Miami-Dade BCCO PA202.

Door panels constructed from 26-gauge 0.017" thick steel skins. Both stiles constructed from wood. Top end rails constructed of 0.032" steel. Bottom end rails constructed of 0.032" steel. Interior cavity of slab filled with rigid polyurethane foam core. Slab glazed with insulated glass mounted in a rigid plastic lip lite surround.

Frame constructed of wood with an extruded aluminum bumper threshold.

PRODUCT COMPLIANCE LABELING:

TESTED IN
ACCORDANCE WITH
MIAMI-DADE BCCO PA202

COMPANY NAME
CITY, STATE

To the best of my knowledge and ability the above side-hinged exterior door unit conforms to the requirements of the 2001 Florida Building Code, Chapter 17 (Structural Tests and Inspections).

State of Florida, Professional Engineer
Kurt Balthazor, P.E. – License Number 56533

Warnock Hersey



Test Data Review Certificate #3026447C and COP/Test Report Validation Matrix #3026447C-001 provides additional information - available from the ITSAWH website (www.itsawh.com), the Masonite website (www.masonite.com) or the Masonite technical center.

2

Entergy
Entry Systems


June 17, 2002
Our continuing program of product improvement makes specifications, design and product detail subject to change without notice.



Exclusively from

Masonite International Corporation

DOUBLE DOOR

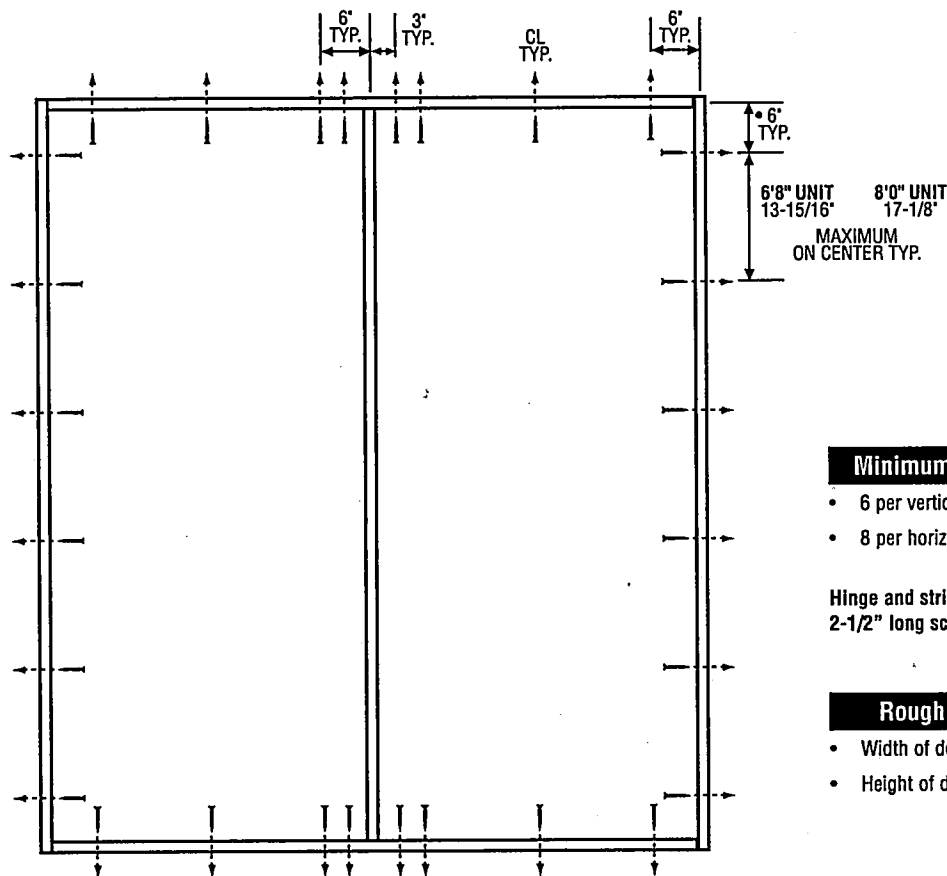

Minimum Fastener Count

- 6 per vertical framing member
- 8 per horizontal framing member

Hinge and strike plates require two 2-1/2" long screws per location.

Rough Opening (RO)

- Width of door unit plus 1/2"
- Height of door unit plus 1/4"

Warnock Hersey Test Data Review Certificate #3026447A; #3026447B; #3026447C and COP/Test Report Validation Matrix #3026447A-001, 002, 003; #3026447B-001, 002, 003; #3026447C-001, 002, 003 provides additional information - available from the ITS/WH website (www.itswh.com), the Masonite website (www.masonite.com) or the Masonite technical center.

Latching Hardware:

- Compliance requires that GRADE 3 or better (ANSI/BHMA A156.2) cylindrical and deadlock hardware be installed.
- **UNITS COVERED BY COP DOCUMENT 3147, 3167, 3242*, 3247, 3262* or 3267.**
Compliance requires that 8" GRADE 1 (ANSI/BHMA A156.16) surface bolts be installed on latch side of active door panel - (1) at top and (1) at bottom.

*Based on required Design Pressure - see COP sheet for details.

Notes:


1. Anchor calculations have been carried out with the lowest (least) fastener rating from the different fasteners being considered for use. Fasteners analyzed for this unit include #8 and #10 wood screws or 3/16" Tapcons.
2. The wood screw single shear design values come from Table 11.3A of ANSI/AF & PA NDS for southern pine lumber with a side member thickness of 1-1/4" and achievement of minimum embedment. The 3/16" Tapcon single shear design values come from the ITW and ELCO Dade County approvals respectively, each with minimum 1-1/4" embedment.
3. Wood bucks by others, must be anchored properly to transfer loads to the structure.

XX
Unit


MAD-WL-MA0012-02

OUTSWING UNITS WITH DOUBLE DOOR

TYPICAL HINGE ATTACHMENT

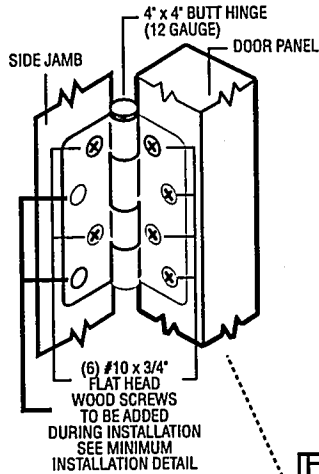

TYPICAL ASTRAGAL PROFILES

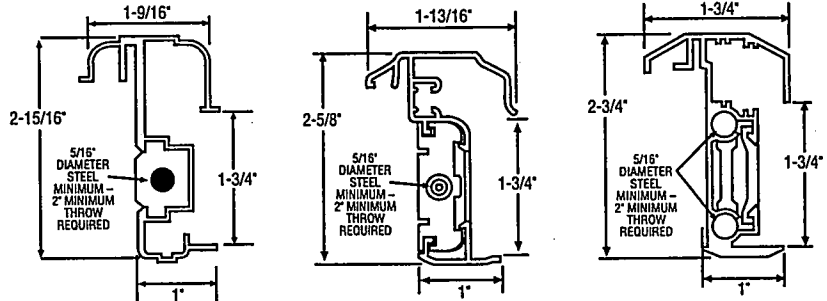

ALUMINUM EXTRUDED ASTRAGAL (0.06\"/>


TYPICAL HEADER & SIDE JAMB ATTACHMENT

FINGER-JOINTED KILN DRY WOOD
FRAME HEADER (1-1/4\"/>

(3) 2\"/>

FINGER-JOINTED
KILN DRY WOOD
SIDE JAMB
(1-1/4\"/>

TYPICAL THRESHOLD & SIDE JAMB ATTACHMENT

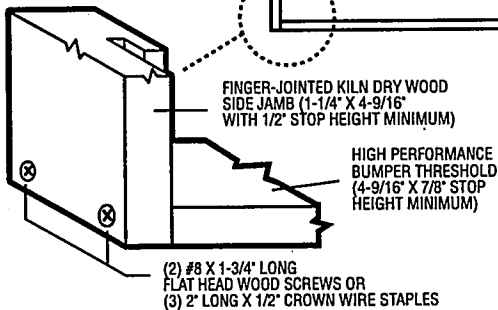

FINGER-JOINTED KILN DRY WOOD
SIDE JAMB (1-1/4\"/>

HIGH PERFORMANCE
BUMPER THRESHOLD
(4-9/16\"/>

(2) #8 X 1-3/4\"/>



Test Data Review Certificate
#3026447A; #3026447B;
#3026447C and COP/Test Report
Validation Matrix #3026447A-001,
002, 003; #3026447B-001, 002,
003; #3026447C-001, 002, 003
provides additional information -
available from the ITS/WH website
(www.itswh.com), the Masonite
website (www.masonite.com) or
the Masonite technical center.

1



BUILDING CODE COMPLIANCE OFFICE
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

CONTRACTOR LICENSING SECTION
(305) 375-2527 FAX (305) 375-2558

CONTRACTOR ENFORCEMENT DIVISION
(305) 375-2966 FAX (305) 375-2908

PRODUCT CONTROL DIVISION
(305) 375-2902 FAX (305) 372-6339

PRODUCT CONTROL NOTICE OF ACCEPTANCE

Premdor Entry Systems
911 E. Jefferson, P.O. Box 76
Pittsburgh, KS 66762

Your application for Notice of Acceptance (NOA) of:

Entergy 6-8 S/E Outswing Glazed Double w/sidelites Residential Insulated Steel Door
under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

ACCEPTANCE NO.: 01-0314.20
EXPIRES: 04/02/2006

Raul Rodriguez
Chief Product Control Division

**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL
CONDITIONS
BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.


Francisco J. Quintana, R.A.
Director
Miami-Dade County
Building Code Compliance Office

APPROVED: 06/05/2001

Premdor Entry SystemsACCEPTANCE No.: 01-0314.20APPROVED : JUN 05 2001EXPIRES : April 02, 2006NOTICE OF ACCEPTANCE: STANDARD CONDITIONS

1. Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
2. Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
3. Renewals of Acceptance will not be considered if:
 - a. There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes.
 - b. The product is no longer the same product (identical) as the one originally approved.
 - c. If the Acceptance holder has not complied with all the requirements of this acceptance including the correct installation of the product.
 - d. The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
4. Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
5. Any of the following shall also be grounds for removal of this Acceptance:
 - a. Unsatisfactory performance of this product or process.
 - b. Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
6. The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
7. A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all time. The engineer needs not reseal the copies.
8. Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
9. This Notice of Acceptance consists of pages 1, 2 and this last page 3.

END OF THIS ACCEPTANCE

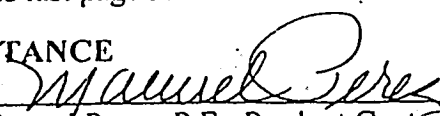
 Manuel Perez, P.E., Product Control Examiner
 Product Control Division

Premdor Entry Systems

ACCEPTANCE No.: 01-0314.20

APPROVED : JUN 05 2001

EXPIRES : April 02, 2006

NOTICE OF ACCEPTANCE: SPECIFIC CONDITIONS

1. SCOPE

- 1.1 This renews the Notice of Acceptance No. 00-0321.22 which was issued on April 28, 2000. It approves a residential insulated door, as described in Section 2 of this Notice of Acceptance, designed to comply with the South Florida Building Code (SFBC), 1994 Edition for Miami-Dade County, for the locations where the pressure requirements, as determined by SFBC Chapter 23, do not exceed the Design Pressure Rating values indicated in the approved drawings.

2. PRODUCT DESCRIPTION

- 2.1 The Series Entergy 6-8 S/E Outswing Glazed Double Residential Insulated Steel Doors with Sidelites and its components shall be constructed in strict compliance with the following documents: Drawing No 31-1028-EM-O, Sheets 1 through 6 of 6, titled "Premdor (Entergy Brand) Double Door with Sidelites with 1/8" Glass in a Wood Frames with Bumper Threshold (Outswing)," prepared by manufacturer, dated 7/29/97 with revision C dated 01/11/00, bearing the Miami-Dade County Product Control approval stamp with the Notice of Acceptance number and approval date by the Miami-Dade County Product Control Division. These documents shall hereinafter be referred to as the approved drawings.

3. LIMITATIONS

- 3.1 This approval applies to single unit applications of pair of doors and single door only, as shown in approved drawings. Single door units shall include all components described in the active leaf of this approval.

4. INSTALLATION


- 4.1 The residential insulated steel door and its components shall be installed in strict compliance with the approved drawings.
- 4.2 Hurricane protection system (shutters): the installation of this unit will require a hurricane protection system.

5. LABELING

- 5.1 Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved".


6. BUILDING PERMIT REQUIREMENTS

- 6.1 Application for building permit shall be accompanied by copies of the following:
- 6.1.1 This Notice of Acceptance
- 6.1.2 Duplicate copies of the approved drawings, as identified in Section 2 of this Notice of Acceptance, clearly marked to show the components selected for the proposed installation.
- 6.1.3 Any other documents required by the Building Official or the South Florida Building Code (SFBC) in order to properly evaluate the installation of this system.


Manuel Perez, P.E. Product Control Examiner
Product Control Division

X

Opaque Outswing Unit

COP-WL-EN4121-02**WOOD-EDGE STEEL DOORS****APPROVED ARRANGEMENT:****Note:**

Units of other sizes are covered by this report as long as the panel used does not exceed 3'0" x 6'8".



Test Data Review Certificate #3026447C and COP/Test Report Validation Matrix #3026447C-001 provides additional information - available from the ITS/WH website (www.itswh.com), the Masonite website (www.masonite.com) or the Masonite technical center.

Single Door

Maximum unit size = 3'0" x 6'8"

Design Pressure

+76.0/-76.0

limited water unless special threshold design is used.

Large Missile Impact Resistance

Hurricane protective system (shutters) is NOT REQUIRED.

Actual design pressure and impact resistant requirements for a specific building design and geographic location is determined by ASCE 7-national, state or local building codes specify the edition required.

MINIMUM ASSEMBLY DETAIL:

Compliance requires that minimum assembly details have been followed – see MAD-WL-MA0011-02.

MINIMUM INSTALLATION DETAIL:

Compliance requires that minimum installation details have been followed – see MID-WL-MA0001-02.

APPROVED DOOR STYLES:

Flush



Arch Top 3-panel



6-panel



New England 4-panel



Eyebrow 4-panel



8-panel



9-panel



5-panel



5-panel with scroll



Eyebrow 5-panel



Eyebrow 5-panel with scroll

Entergy
Entry Systems

June 17, 2002

Our continuing program of product improvement makes specifications, design and product detail subject to change without notice.

PREMIER Collection
Premium Quality Doors



Exclusively from

Masonite
Masonite International Corporation

X

Opaque Outswing Unit

COP-WL-EN4121-02

WOOD-EDGE STEEL DOORS

CERTIFIED TEST REPORTS:

NCTL 210-1861-4, 5, 6

Certifying Engineer and License Number: Barry D. Portney, P.E. / 16258.

Unit Tested in Accordance with Miami-Dade BCCO PA201, PA202 and PA203.

Door panels constructed from 26-gauge 0.017" thick steel skins. Both stiles constructed from wood. Top end rails constructed of 0.032" steel. Bottom end rails constructed of 0.032" steel. Interior cavity of slab filled with rigid polyurethane foam core.

Frame constructed of wood with an extruded aluminum bumper threshold.

PRODUCT COMPLIANCE LABELING:

TESTED IN ACCORDANCE WITH
MIAMI-DADE BCCO
PA201, PA202 & PA203

COMPANY NAME
CITY, STATE

To the best of my knowledge and ability the above side-hinged exterior door unit conforms to the requirements of the 2001 Florida Building Code, Chapter 17 (Structural Tests and Inspections).



State of Florida, Professional Engineer
Kurt Balthazor, P.E. – License Number 56533

Warnock Hersey



Test Data Review Certificate #3026447C and COP/Test Report Validation Matrix #3026447C-001 provides additional information - available from the ITS/WH website (www.itsmko.com), the Masonite website (www.masonite.com) or the Masonite technical center.

2

Entergy
Entry Systems


June 17, 2002

Our continuing program of product improvement makes specifications, design and product detail subject to change without notice.

PREMDOR Collection
Premium Quality Doors

Exclusively from
Masonite
Masonite International Corporation

PREMDOR (ENTERGY BRAND) DOUBLE DOOR WITH SIDELITES W/ 1/8" GLASS - IN A WOOD FRAME W/BUMPER THRESHOLD (OUTSWING)

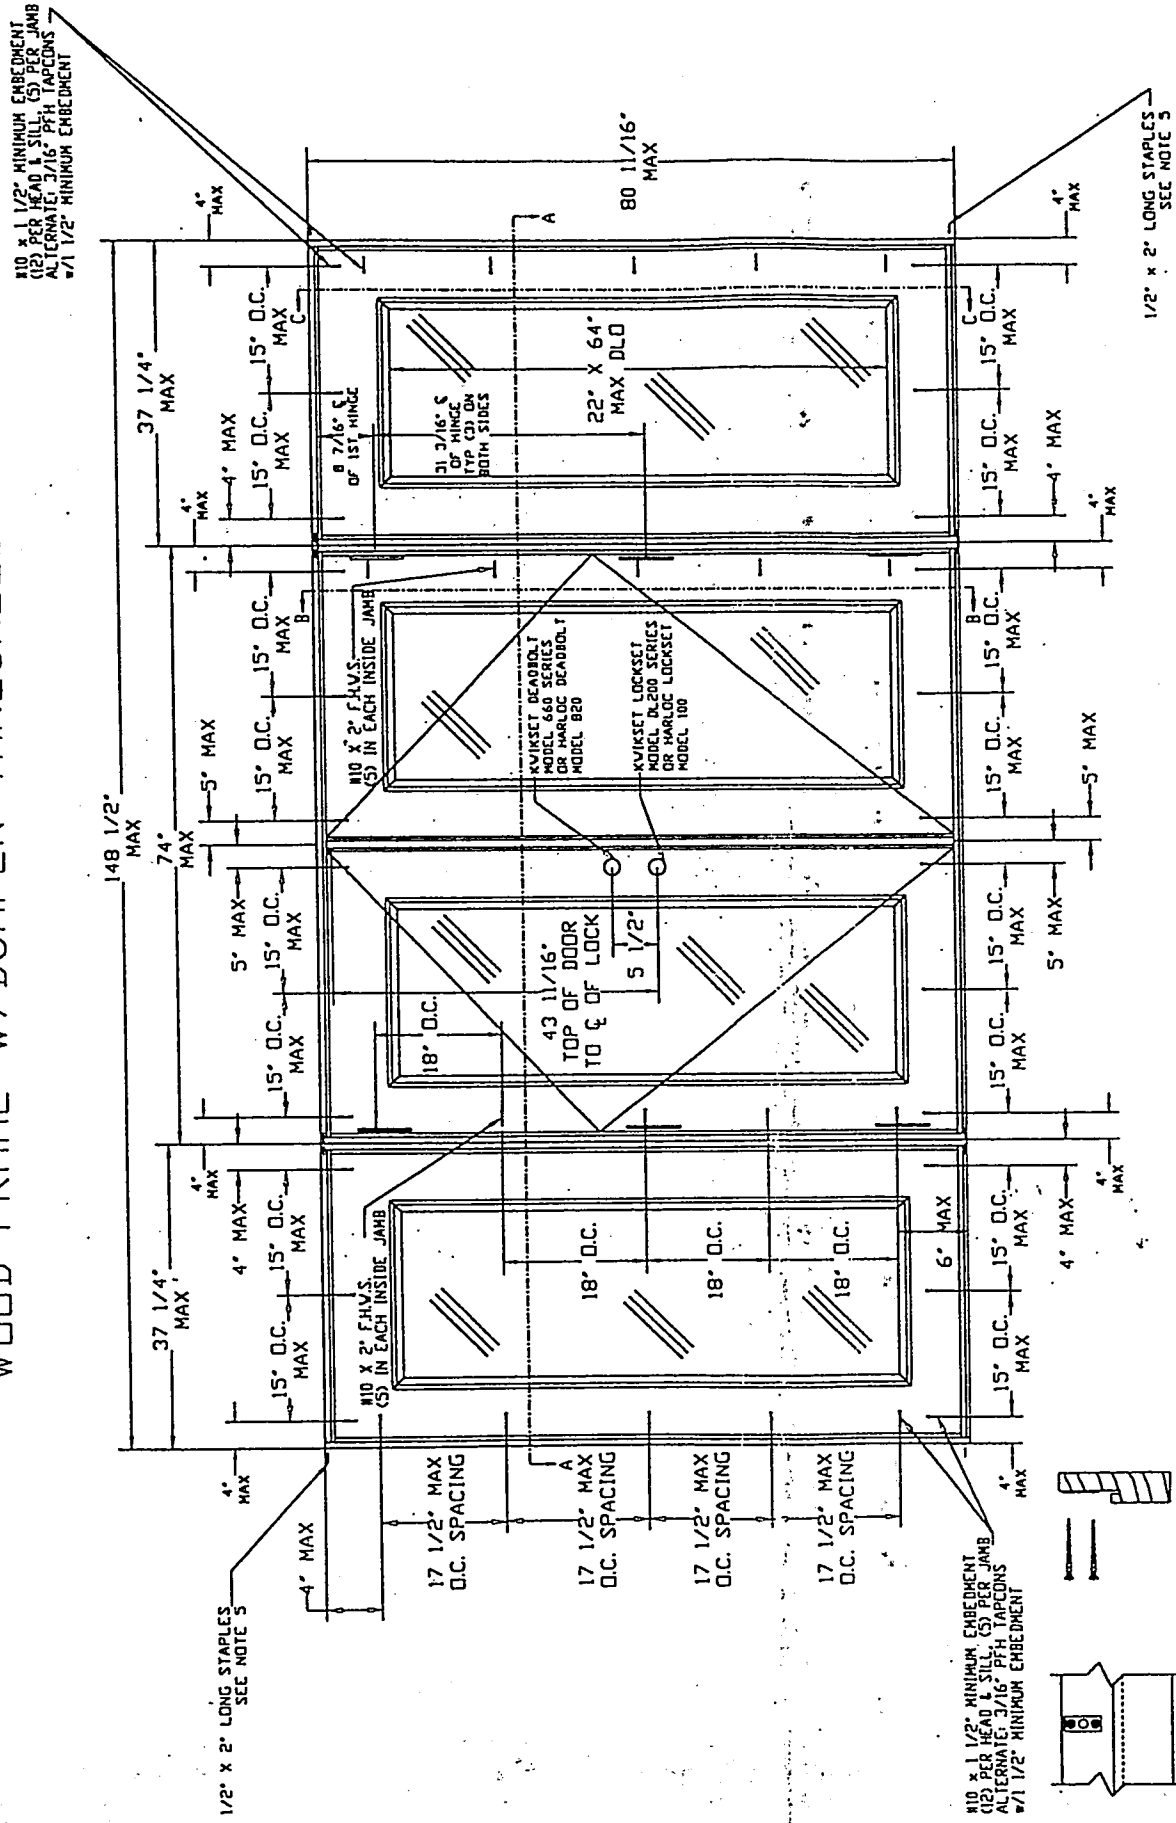

ATTACH ASTRAGAL THROW BOLT
STRIKE PLATE TO THE HEADER
AND THRESHOLD WITH #10 x 1 3/4\"/>

NOTES:

1.) WOOD BUCKS BY OTHERS. MUST BE ANCHORED
PROPERLY TO TRANSFER LOADS TO THE STRUCTURE.
2.) THE PRECEDING DRAWINGS ARE INTENDED TO
QUALIFY THE FOLLOWING INSTALLATIONS.

A. WOOD FRAME CONSTRUCTION WHERE DOOR
SYSTEM IS ANCHORED TO A MINIMUM TWO BY WOOD
OPENING.

B. MASONRY OR CONCRETE CONSTRUCTION WHERE
DOOR SYSTEM IS ANCHORED TO A MINIMUM TWO BY
STRUCTURAL WOOD BUCK.

C. MASONRY OR CONCRETE CONSTRUCTION WHERE
DOOR SYSTEM IS ANCHORED DIRECTLY TO CONCRETE
OR MASONRY WITH OR WITHOUT A NON-STRUCTURAL
ONE BY WOOD BUCK.

3. ALL ANCHORING SCREWS TO BE #10 WITH
MINIMUM 1 1/2\"/>


4. UNIT MUST BE INSTALLED WITH 'MIAMI-DADE COUNTY
'APPROVED' SHUTTERS
5. THREE STAPLES PER SIDE JAMB INTO HEADER ON SIDELITES
AND DOOR, THREE STAPLES PER JAMB INTO THRESHOLD ON
SIDELITES AND DOOR.

6. LATEX SEALANT TO BE APPLIED AT SIDE BY SIDE
JAMBS AND SIDELITES.

7. DOOR/SIDELITE HEADER, DOOR/SIDELITE JAMBS, AND SIDELITE BASE
CORNERS ARE COPED AND BUTT JOINED.

8. DOORS SHALL BE PRE-PAINTED WITH A WATER-BASED EPOXY RUST
INHIBITIVE PRIMER PAINT WITH A DRY FILM THICKNESS OF 0.8 TO 1.2 MIL.

9. FRAMES SHALL BE PRE-PAINTED WITH AN ACRYLIC LATEX WATER-BASED/
WATER-REDUCIBLE WHITE PRIMER WITH A DRY FILM THICKNESS OF 0.8 TO 1.2 MIL.



ASTRAGAL

R.H. OUTSWING L.H. OUTSWING

DESIGN PRESSURE RATINGS	
WHERE WATER INFILTRATION REQUIREMENT IS NEEDED *	WHERE WATER INFILTRATION REQUIREMENT IS NOT NEEDED
Positive +50.5 psf	+50.5 psf
Negative NOT APPROVED*	-50.5 psf

* UNITS SHALL BE INSTALLED ONLY AT LOCATIONS PROTECTED BY A CANOPY OR
OVERHANG SUCH THAT THE ANGLE BETWEEN THE EDGE OF CANOPY OR OVERHANG
TO SILL IS LESS THAN 45 DEGREES. UNLESS UNIT IS INSTALLED IN
NON-HABITABLE AREAS WHERE THE UNIT AND THE AREA ARE DESIGNED TO
ACCEPT WATER INFILTRATION.




APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE **JUN 05 2001**
BY *Manuel Jerez*
PROD/CT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. *01-0314.20*

C	DATE	COUNTY	MODIFICATIONS	JOB
B	ADDED	PAGE 5	DOOR OPTIONS	10-1-98
A	ADDED	OTHER	DOOR CONFIGURATIONS	12/18/97
LIR	REVISIONS	DATE	BY	
PART NAME	CHERRY OAK, COLORED DOOR VERTICALS	SCALE	N.T.S.	

PREMDOR ENTRY SYSTEMS


911 E. JEFFERSON
PITTSBURGH, KS 66762

31-1028-EM-D
SHEET 1 OF 6

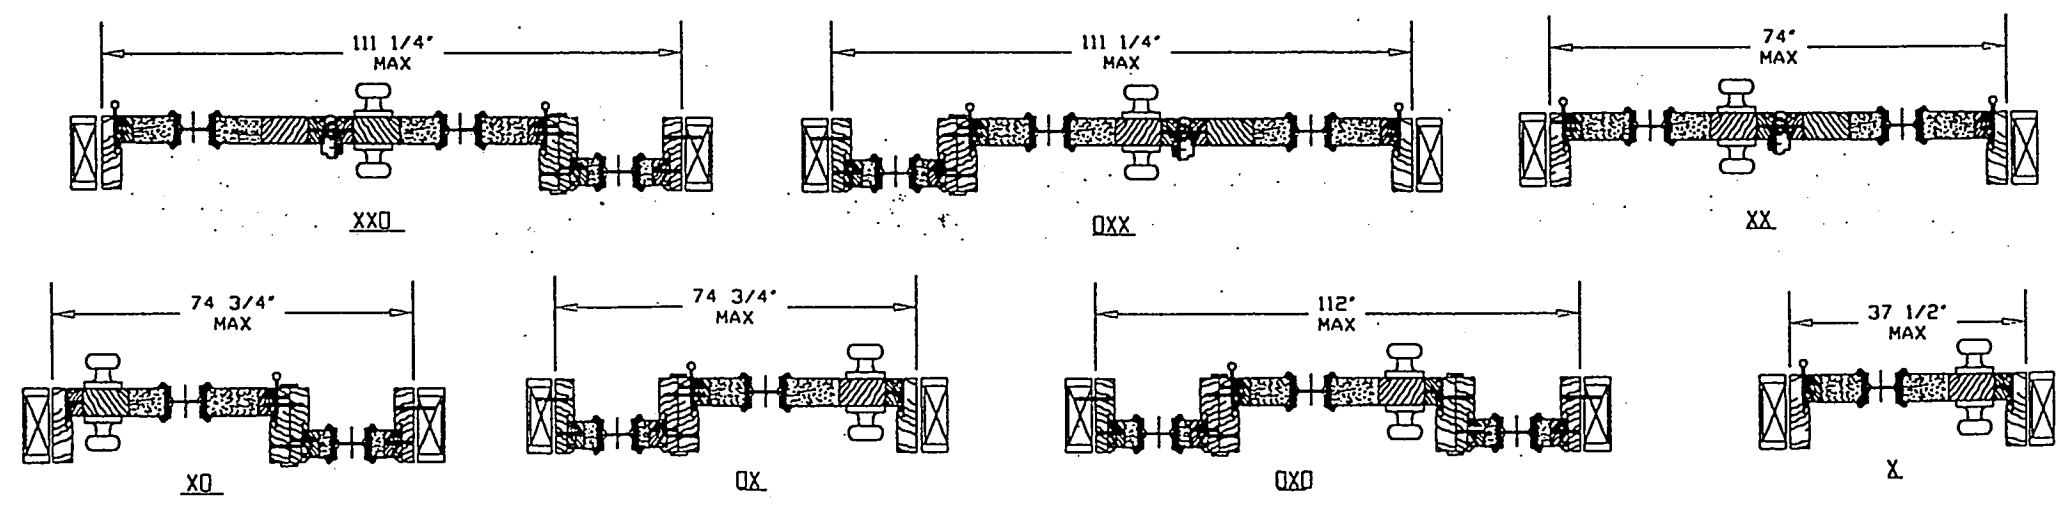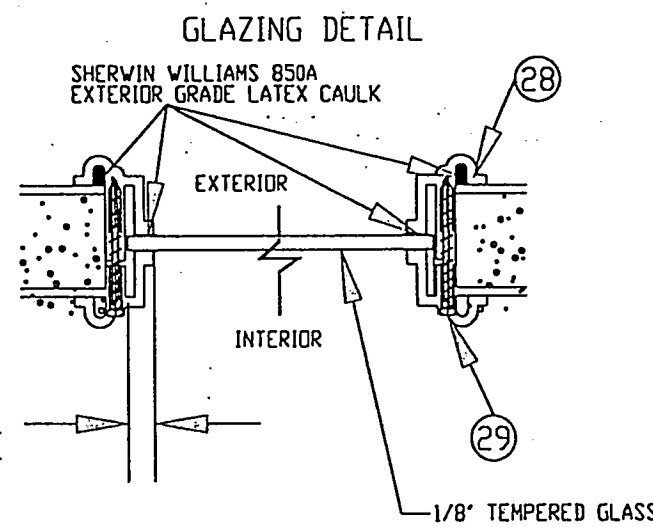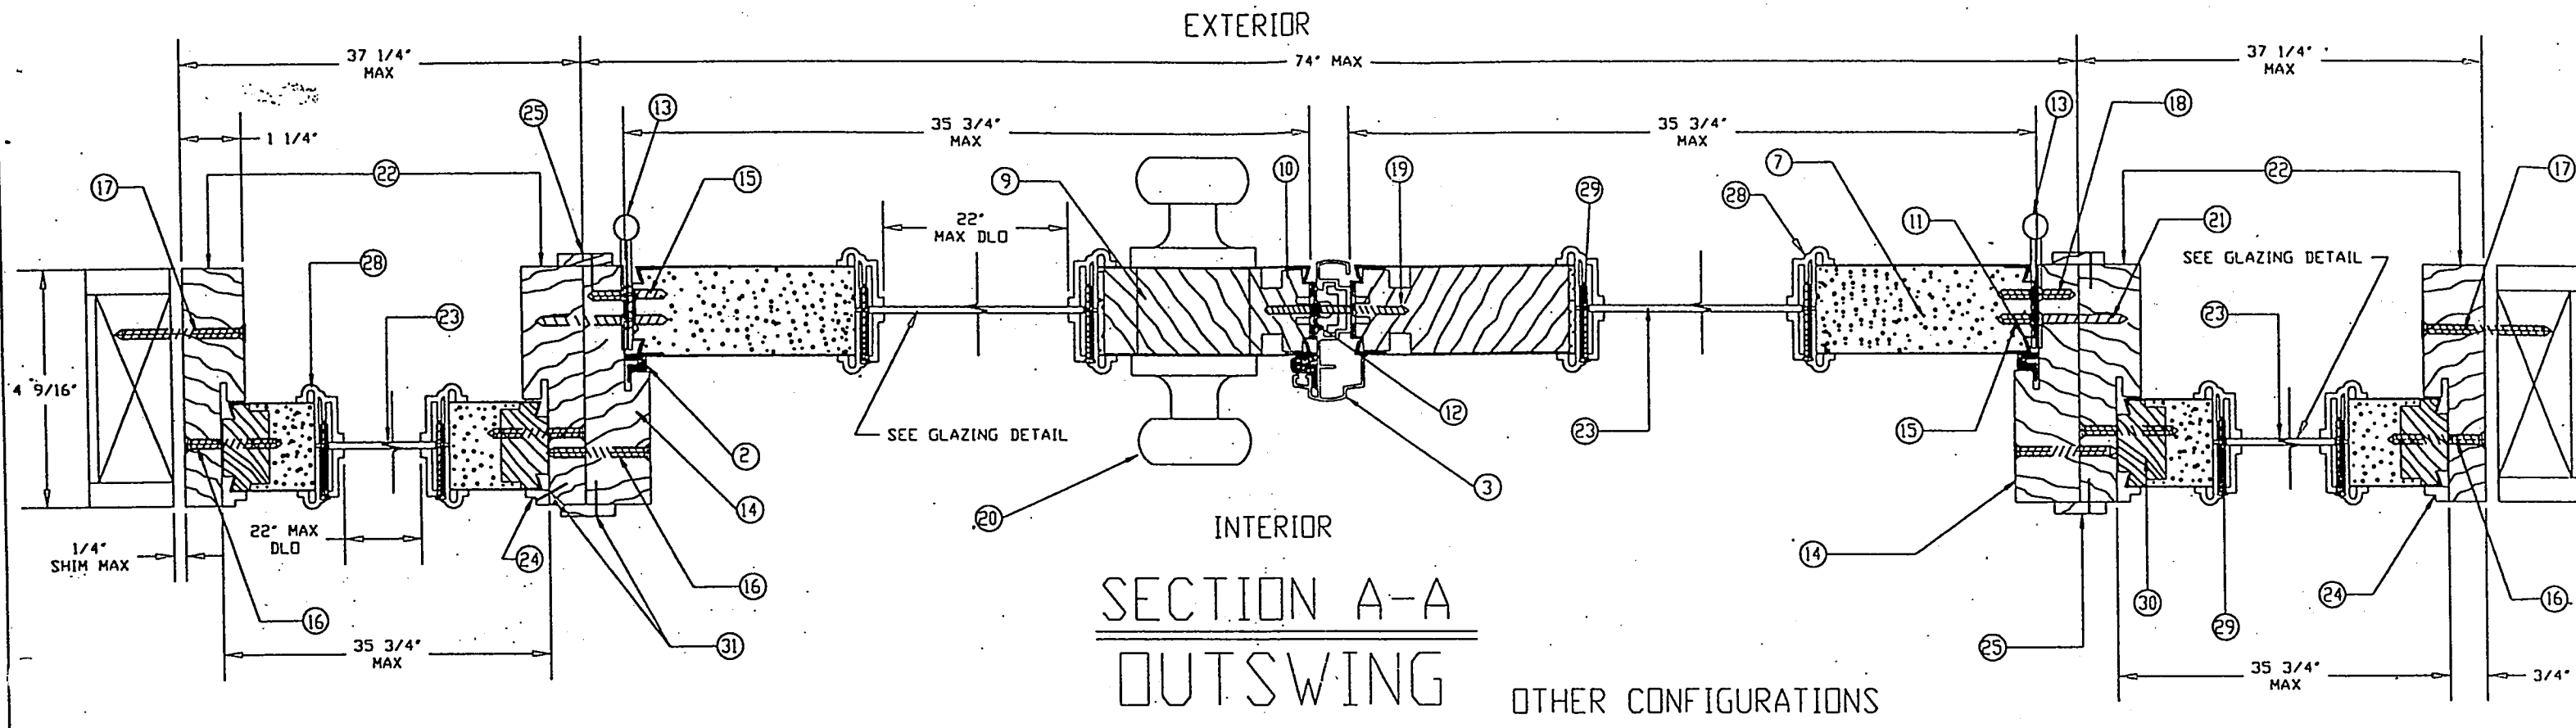

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2001
BY *Manuel Perez*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314.20

LIMITS: UNLESS NOTED, FRAC. : DEC : ANG : EXTRUSIONS: UNLESS NOTED, STD. COMPL. TO S. ENGINEER: DR. BY R.S. DATE 7-29-97 PREMDOR ENTRY SYSTEMS 911 E. JEFFERSON PITTSBURGH, KS 66762	C	DADE COUNTY MODIFICATIONS	7/11/01	J.D.
	B	ADDED PAGE 5 (DOOR OPTIONS)	10-1-98	R.S.
	A	ADD SCREWS TO LITE FRAMES & ADD OTHER DOOR CONFIGURATIONS	2-18-97	R.S.
	LIR	REVISIONS	DATE	BY
PART NAME: ENTRY DOOR W/ SIDELITES (A-A)		SCALE: N.T.S.		
31-1028-EM-0				REVISION LETTER C
SHEET 2 OF 6				

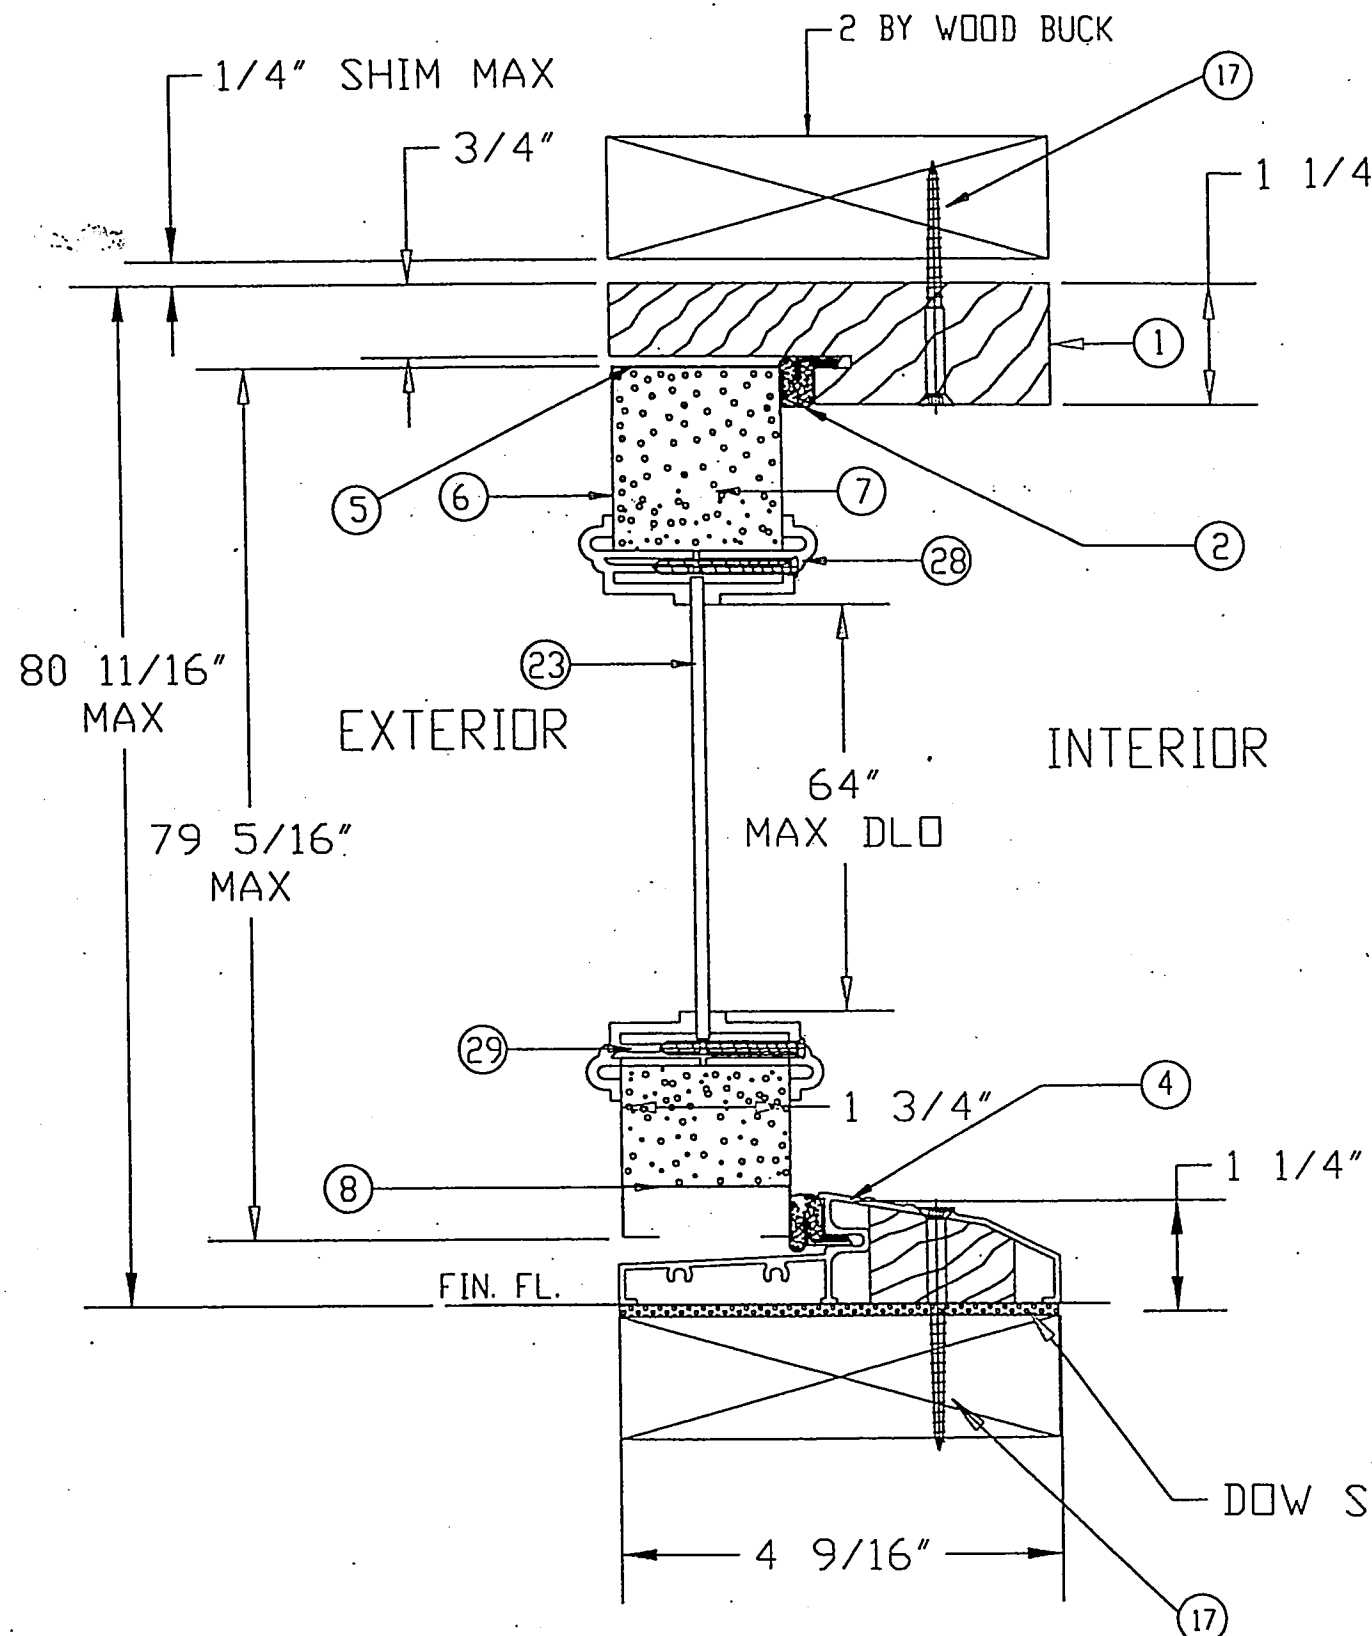


SECTION B-B

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE **JUN 05 2001**
BY *[Signature]*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. **01-0314.20**

MATERIALS LIST			
ITEM NO.	DESCRIPTION	PART NUMBER	COMMENTS
①	WOOD HEAD JAMB	EM-14	1 1/4" X 4 9/16" MTL. TO BE PINE OR EQUIVALENT
②	COMPRESSION WEATHERSTRIP	EM-25	LOCKSCREEN BRAND LOXSEAL 9650 (BRONZE)
③	ALUMINUM ASTRAGAL	EM-12	PREMDOR BRAND OR EQUIVALENT- 5/8" ALUMINUM ASTRAGAL
④	ALUMINUM-BUMPER THRESHOLD	EM-15	PREMDOR BRAND OR EQUIVALENT - 1 1/4" x 4 9/16"
⑤	TOP CHANNEL	EM-08	PREMDOR BRAND - 1 11/16" - 20 GA STEEL
⑥	STEEL SKIN	26 ga. (.017 ±.004 -.000)	MIN. YIELD STRENGTH 45,000 PSI - MIN. THICKNESS PER TEXTILE TEST REPORT IS OK
⑦	POLYURETHANE FOAM CORE	BASF FOAM -	DENSITY 2.0 TO 2.5 lbs./ft ³
⑧	BOTTOM CHANNEL	EM-07	PREMDOR BRAND - 1 11/16" - 20 GA STEEL
⑨	WOOD LOCK BLOCK	EM-09	4" X 9 1/2" MTL. TO BE PINE OR EQUIVALENT
⑩	STRIKE STILE	EM-06	PREMDOR BRAND - 1 11/16" - 20 GA STEEL
⑪	HINGE STILE	EM-05	PREMDOR BRAND - 1 11/16" - 20 GA STEEL
⑫	LOCK PREP FILLER PLATE	EM-10	PREMDOR BRAND - .050" THICK- MTL. TO BE POLYETHYLENE
⑬	4"x4" HINGE	EM-16	HAGER BRAND HINGE OR EQUIVALENT - .097 THICK (STEEL)
⑭	WOOD HINGE JAMB	EM-13	1 1/4" X 4 9/16" MTL. TO BE PINE OR EQUIVALENT
⑮	#10-24 x 1/2" F.H.M.S.		(4) SCREWS PER HINGE INTO DOOR
⑯	#10 X 2" F.H.W.S.		(5) SCREWS THROUGH HINGE JAMB INTO SIDELITE JAMB, 8" DOWN FROM TOP MAX 18" O.C. THEREAFTER (10) SCREWS THROUGH STRIKE JAMB INTO SIDELITE JAMB, 4" DOWN FROM TOP MAX 8" O.C. THEREAFTER (6) SCREWS THROUGH EACH SIDELITE JAMB INTO SIDELITE, 4" DOWN FROM TOP, MAX 15" O.C. THEREAFTER
⑰	#10 F.H.W.S. V/MINIMUM 1 1/2" EMBEDMENT OR 3/16" P.F.H. TAPCONS V/MINIMUM 1 1/2" EMBEDMENT		REFER TO ELEVATION VIEW, FOR # OF SCREWS USED AND LOCATIONS
⑱	#10 X 3/4" F.H.W.S.		(2) SCREWS PER HINGE INTO JAMB
⑲	#8 x 2" F.H.W.S.		(2) SCREWS AT EACH STRIKE PLATE
⑳	LOCKSET		KWIKSET BRAND 200 LOCK OR HARLOC BRAND 100 LOCK
㉑	#10 X 1 3/4" F.H.W.S.		(2) SCREWS PER HINGE INTO JAMB
㉒	WOOD SIDELITE JAMB	EM-18	1 1/4" X 4 9/16" MTL. TO BE PINE OR EQUIVALENT
㉓	22' X 64' SINGLE PANEL GLASS	EM-19	TEMPERED GLASS IN POLYPROPYLENE FRAME- DC-1643 - (ODL- 1/8" CLEAR TEMPERED GLASS
㉔	SIDELITE TRIM (WOOD)	EM-20	5/16" X 1/2" MTL. TO BE PINE OR EQUIVALENT
㉕	WOOD CASING	EM-21	1/8" X 1" MTL. TO BE PINE OR EQUIVALENT - ITEMS ARE MOLDINGS US FOR "SIDE BY SIDE JAMBS" AS MULLIONS
㉖	WOOD SIDELITE HEAD JAMB	EM-22	1 1/4" X 4 9/16" MTL. TO BE PINE OR EQUIVALENT
㉗	WOOD SIDELITE BASE	EM-23	1 1/4" X 4 9/16" MTL. TO BE PINE OR EQUIVALENT
㉘	POLYPROPYLENE LITE FRAME	DC-1643, ODL-2	HP Polypropylene by ODL
㉙	#6 X 1 1/2" PAN HEAD SCREWS		18 PER FRAME SCREW SPACING TO BE 3" IN FROM EACH CORNER AND IN TO EXCEED 14" O.C. THEREAFTER
㉚	SIDELITE STILES	EM-26	15/16" X 1 11/16" MTL. TO BE PINE OR EQUIVALENT
㉛	PIN NAIL		3/4" LONG NAIL, 4" IN FROM END, MAX 8" O.C. THEREAFTER, USED ON MULLIONS AND IF

LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :		B	DADE COUNTY MODIFICATIONS	1/11/01	JD
EXTRUSIONS: UNLESS NOTED, STD. COM'L. TOL'S.		A	ADDED PAGE 5 (DOOR OPTIONS)	10-1-98	RS
ENGINEER:		LTR	REVISIONS	DATE	BY
DR. BY R.S. DATE 7-29-97		PART NAME: ENTERGY STEEL EDGE DOOR (B-B)		SCALE:	
PREMDOR ENTRY SYSTEMS		31-1028-EM-D		SHEET 3 OF 6	
911 E. JEFFERSON PITTSBURG, KS. 66762		A		REVISION LETTER B	

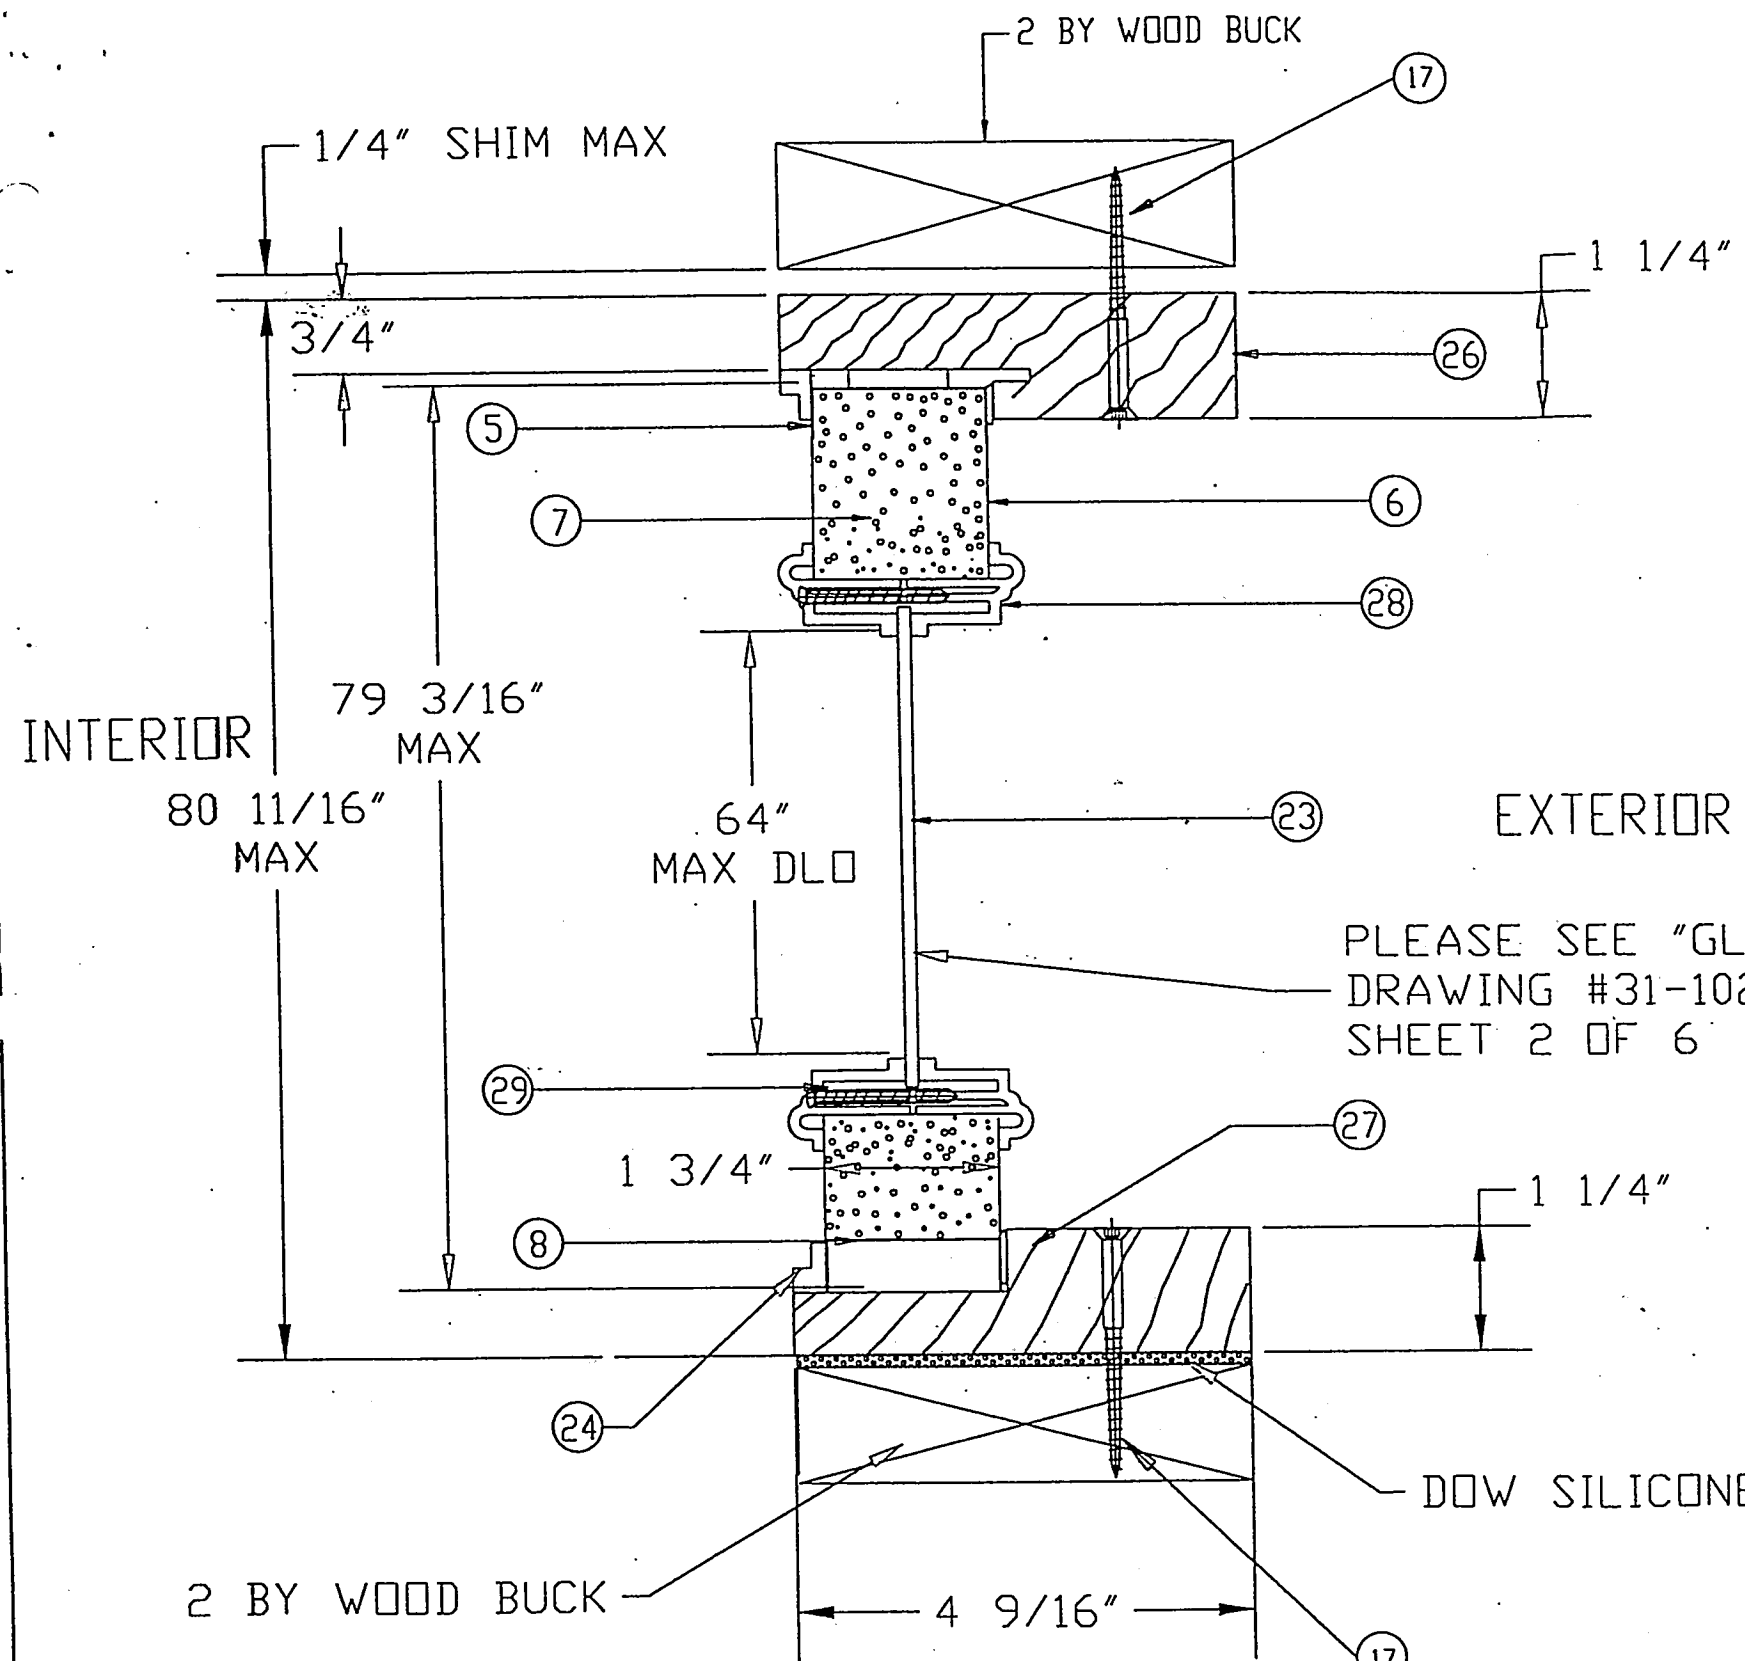

SECTION C-C

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2001
BY [Signature]
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314.20

LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :
EXTRUSIONS: UNLESS NOTED, STD. COM'L. TOL'S.

ENGINEER:

DR. BY R.S. DATE 7-29-97

PREMDOR ENTRY SYSTEMS
911 E. JEFFERSON
PITTSBURG, KS. 66762

D	DADE COUNTY MODIFICATIONS	1/11/01	JD
C	MATERIAL WAS POLYSTYRENE	6-2-99	RS
B	ADDED PAGE 5 (DOOR OPTIONS)	10-1-98	RS
A	ADD SCREWS TO LITE FRAME & MATERIAL LIST	12-18-97	R.S.
LTR.	REVISIONS	DATE	B


PART NAME: ENTERGY STEEL EDGE SIDELITE (C-C)

MAT'L: SCALE:


31-1028-EM-0
SHEET 4 OF 6

REVISION LETTER D


OTHER DOOR CONFIGURATIONS

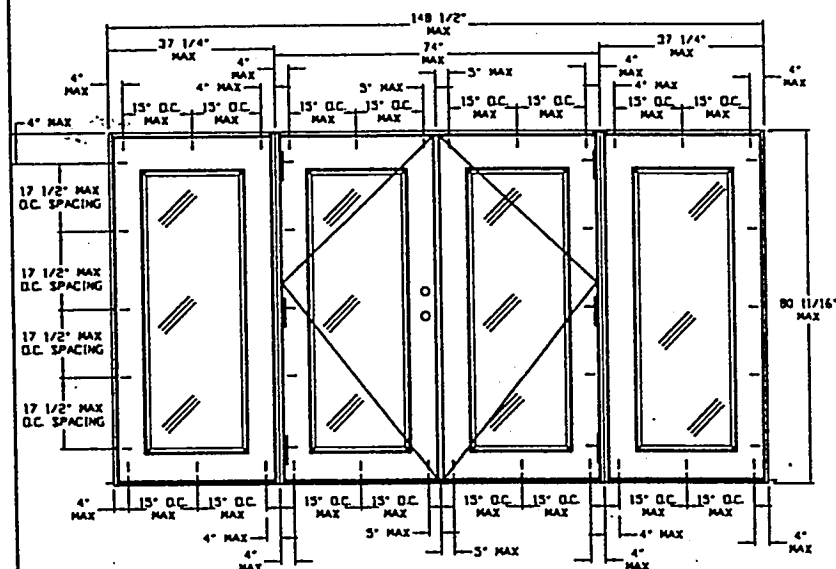


OXXO

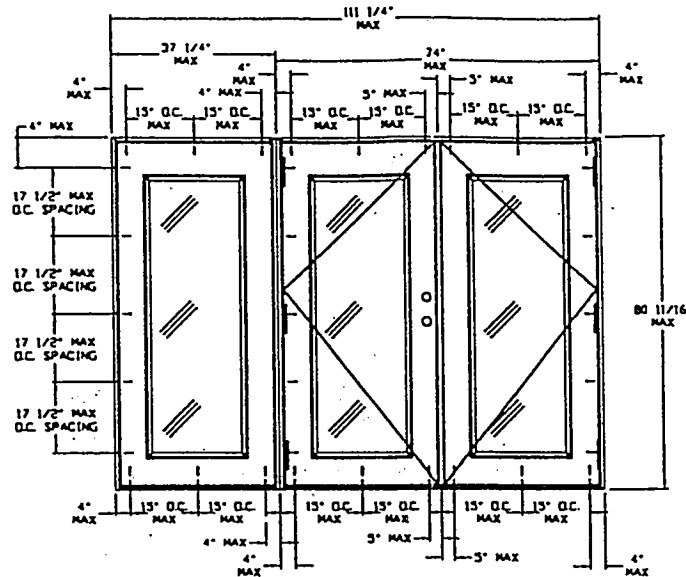


OXX

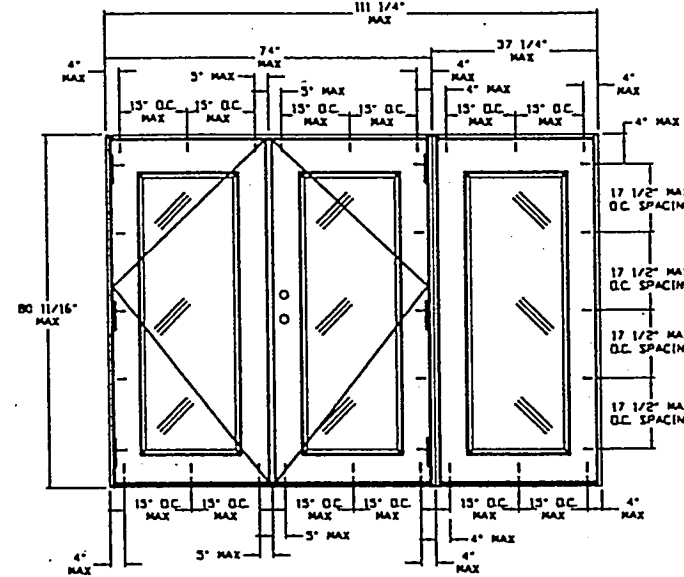


XXO

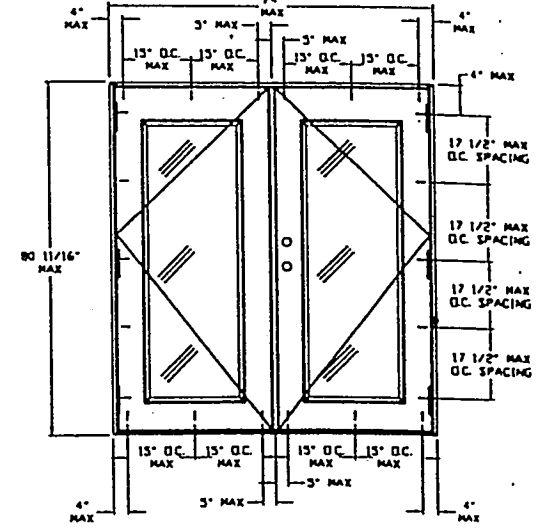


XX

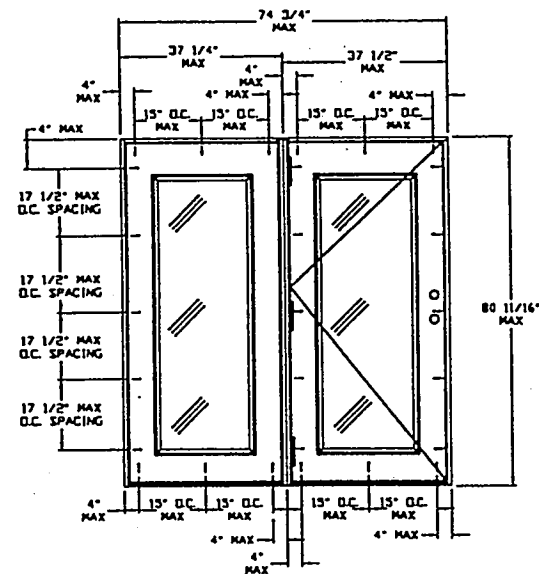


OX

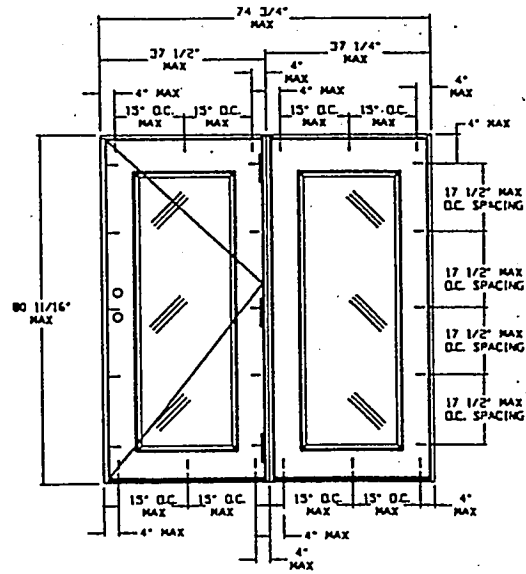

XO

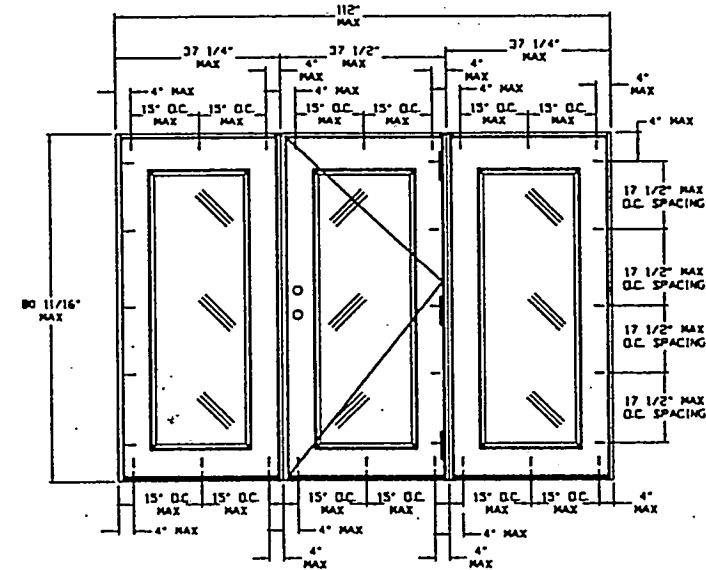

OXO

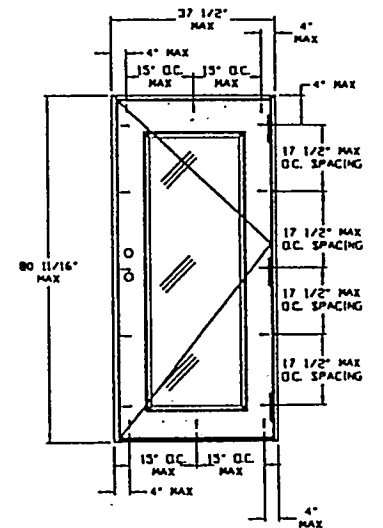


X

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2001
BY Mmanuel Perez
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314.20

LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :					
EXTRUSIONS: UNLESS NOTED, STD. COM'L. TOL'S.					
ENGINEER:		LTR.	REVISIONS		DATE BY
DR. BY J.D.		PART NAME:		SCALE:	
DATE 1-11-01		MAT'L:			
PREMDOR ENTRY SYSTEMS				31-1028-EM-O	
911 E. JEFFERSON				SHEET 5 OF 6	
PITTSBURG, KS. 66762				REVISION LETTER	

OTHER GLAZED DOOR PANEL/SIDELITE STYLES W/SURFACE APPLIED MUNTINS

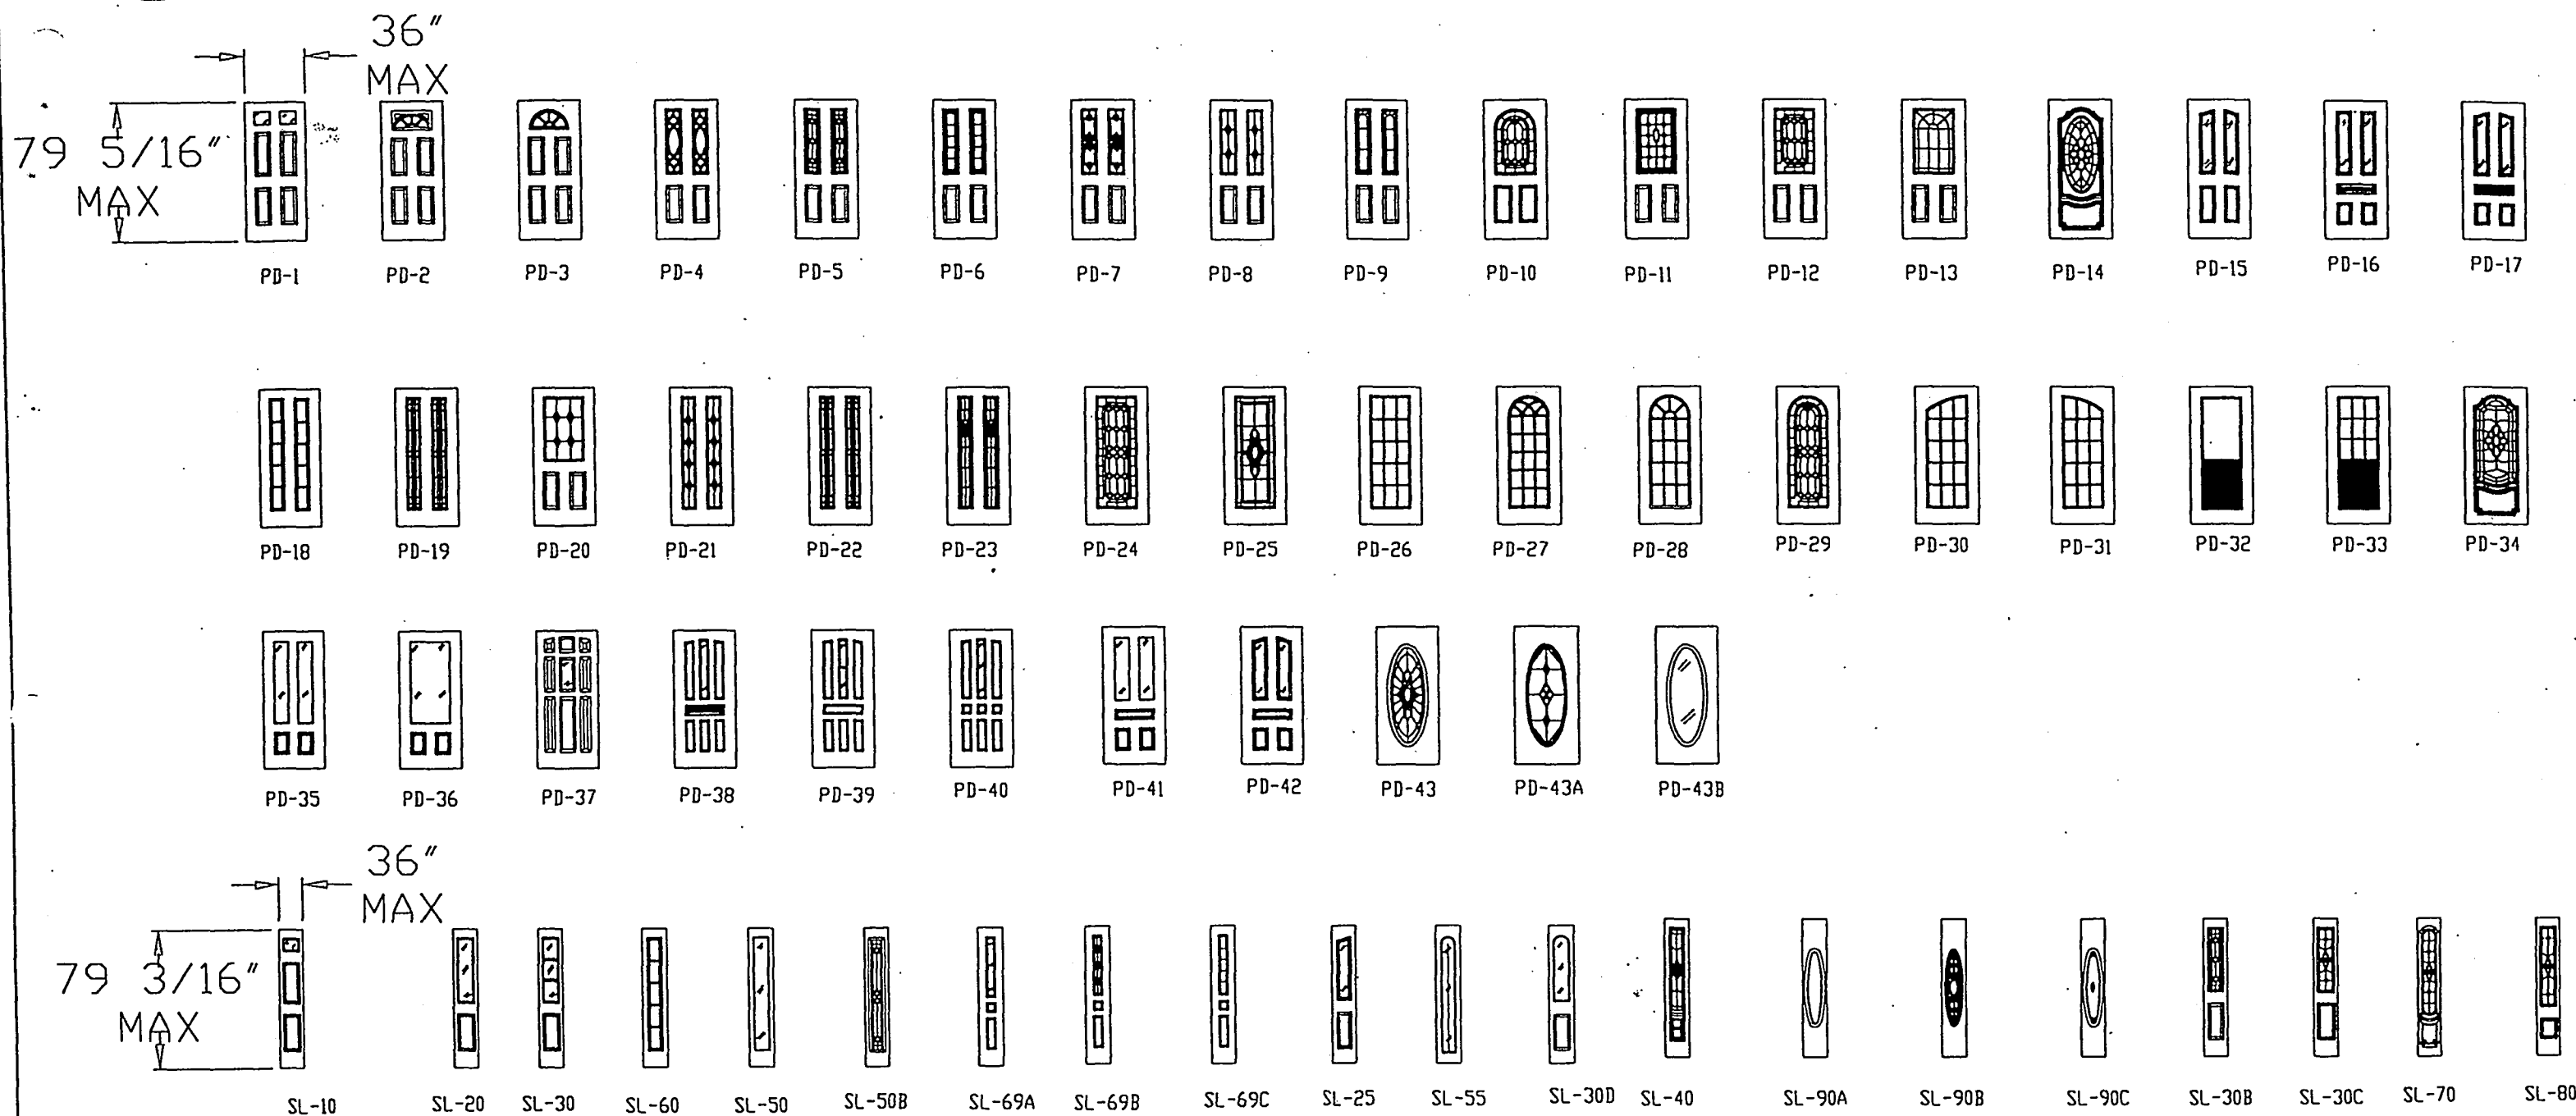


APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE **JUN 05 2001**
BY *Manuel Perez*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO **01-0314.20**


LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :			
EXTRUSIONS: UNLESS NOTED, STD. COM. TOL'S.			
ENGINEER:	LTR.	REVISIONS	DATE BY
DR. BY J.D. DATE 1/15/01		PART NAME: PREMDOR DOOR OPTIONS	
PREMDOR ENTRY SYSTEMS		SCALE:	
911 E. JEFFERSON PITTSBURG, KS. 66762		31-1028-EM-0 SHEET 6 OF 6	
		REVISION LETTER	

OUTSWING UNITS WITH SINGLE DOOR


TYPICAL HINGE ATTACHMENT

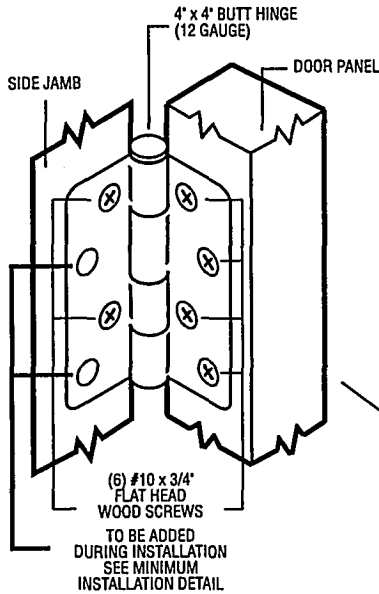

TYPICAL HEADER & SIDE JAMB ATTACHMENT

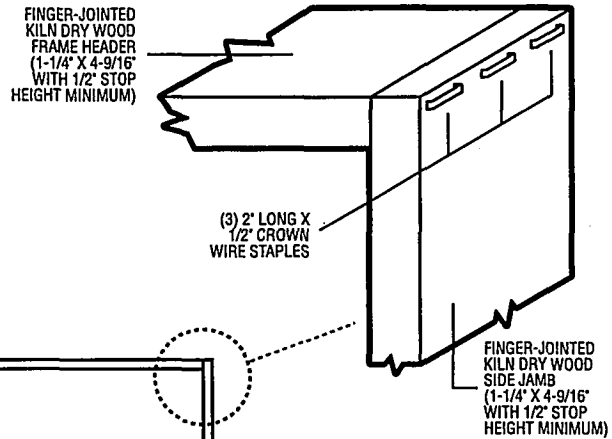


TYPICAL THRESHOLD & SIDE JAMB ATTACHMENT

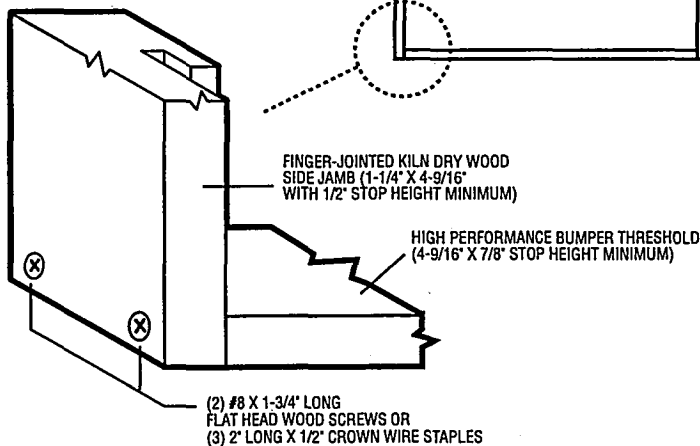

Test Data Review Certificate
#3026447A; #3026447B;
#3026447C and COP Test Report
Validation Matrix #3026447A-001,
002, 003; #3026447B-001, 002,
003; #3026447C-001, 002, 003
provides additional information -
available from the ITS/WH website
(www.itssemko.com), the Masonite
website (www.masonite.com) or
the Masonite technical center.

SINGLE DOOR

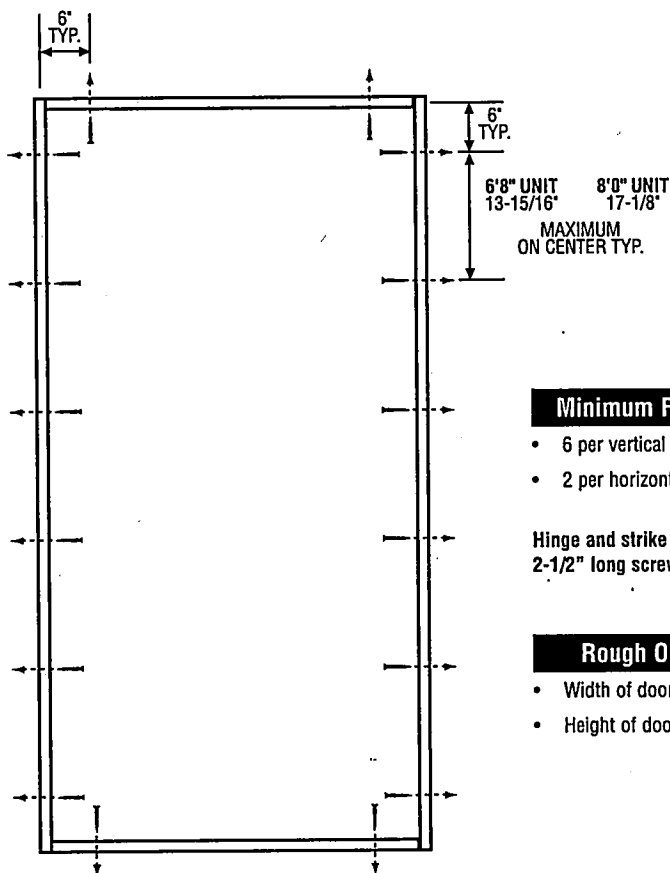

Minimum Fastener Count

- 6 per vertical framing member
- 2 per horizontal framing member

Hinge and strike plates require two 2-1/2" long screws per location.

Rough Opening (RO)

- Width of door unit plus 1/2"
- Height of door unit plus 1/4"

Warnock Hersey Test Data Review Certificate #3026447A; #3026447B; #3026447C and COP/Test Report Validation Matrix #3026447A-001, 002, 003; #3026447B-001, 002, 003; #3026447C-001, 002, 003 provides additional information - available from the ITS/WH website (www.itssemko.com), the Masonite website (www.masonite.com) or the Masonite technical center.

Latching Hardware:

- Compliance requires that GRADE 3 or better (ANSI/BHMA A156.2) cylindrical and deadlock hardware be installed.
- **UNITS COVERED BY COP DOCUMENT 3146, 3166, 3241*, 3246, 3261* or 3266**
Compliance requires that 8" GRADE 1 (ANSI/BHMA A156.16) surface bolts be installed on latch side of active door panel - (1) at top and (1) at bottom.

*Based on required Design Pressure - see COP sheet for details.

Notes:

1. Anchor calculations have been carried out with the lowest (least) fastener rating from the different fasteners being considered for use. Fasteners analyzed for this unit include #8 and #10 wood screws or 3/16" Tapcons.
2. The wood screw single shear design values come from Table 11.3A of ANSI/AF & PA NDS for southern pine lumber with a side member thickness of 1-1/4" and achievement of minimum embedment. The 3/16" Tapcon single shear design values come from the ITW and ELCO Dade County approvals respectively, each with minimum 1-1/4" embedment.
3. Wood bucks by others, must be anchored properly to transfer loads to the structure.



BUILDING CODE COMPLIANCE OFFICE
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

PRODUCT CONTROL NOTICE OF ACCEPTANCE

Premdor Entry Systems
911 E. Jefferson, P.O. Box 76
Pittsburgh, KS 66762

CONTRACTOR LICENSING SECTION
(305) 375-2527 FAX (305) 375-2558

CONTRACTOR ENFORCEMENT DIVISION
(305) 375-2966 FAX (305) 375-2908

PRODUCT CONTROL DIVISION
(305) 375-2902 FAX (305) 372-6339

Your application for Notice of Acceptance (NOA) of:

Entergy 6-8 S/E Outswing Opaque Single w/sidelites Residential Insulated Steel Door
under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

ACCEPTANCE NO.: 01-0314.19
EXPIRES: 04/02/2006

Raul Rodriguez
Chief Product Control Division

THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL CONDITIONS BUILDING CODE & PRODUCT REVIEW COMMITTEE

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.
Director
Miami-Dade County
Building Code Compliance Office

APPROVED: 06/05/2001

Premdor Entry Systems

ACCEPTANCE No.: 01-0314.19

APPROVED : JUN 05 2001

EXPIRES : April 02, 2006

NOTICE OF ACCEPTANCE: SPECIFIC CONDITIONS

1. **SCOPE**

- 1.1 This renews the Notice of Acceptance No. 00-0321.21 which was issued on April 28, 2000. It approves a residential insulated door, as described in Section 2 of this Notice of Acceptance, designed to comply with the South Florida Building Code (SFBC), 1994 Edition for Miami-Dade County, for the locations where the pressure requirements, as determined by SFBC Chapter 23, do not exceed the Design Pressure Rating values indicated in the approved drawings.

2. **PRODUCT DESCRIPTION**

- 2.1 The Series Entergy 6-8 S/E Outswing Opaque Single Residential Insulated Steel Door with Sidelites- Impact Resistant Door Slab Only and its components shall be constructed in strict compliance with the following documents: Drawing No 31-1020-EM-O, Sheets 1 through 6 of 6, titled "Premdor (Entergy Brand) Steel Edge Single Door with Sidelites in Wood Frames with Bumper Threshold (Outswing)," prepared by manufacturer, dated 4/09/97 with revision C dated 01/15/01, bearing the Miami-Dade County Product Control approval stamp with the Notice of Acceptance number and approval date by the Miami-Dade County Product Control Division. These documents shall hereinafter be referred to as the approved drawings.

3. **LIMITATIONS**

- 3.1 This approval applies to single unit applications of single door only, as shown in approved drawings.

4. **INSTALLATION**


- 4.1 The residential insulated steel door and its components shall be installed in strict compliance with the approved drawings.
- 4.2 Hurricane protection system (shutters):
- 4.2.1 Door: the installation of this unit will not require a hurricane protection system.
- 4.2.2 Sidelite: the installation of this unit will require a hurricane protection system.

5. **LABELING**

- 5.1 Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved".

6. **BUILDING PERMIT REQUIREMENTS**

- 6.1 Application for building permit shall be accompanied by copies of the following:
- 6.1.1 This Notice of Acceptance
- 6.1.2 Duplicate copies of the approved drawings, as identified in Section 2 of this Notice of Acceptance, clearly marked to show the components selected for the proposed installation.
- 6.1.3 Any other documents required by the Building Official or the South Florida Building Code (SFBC) in order to properly evaluate the installation of this system.

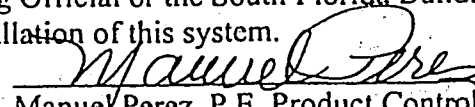
Manuel Perez, P.E. Product Control Examiner
Product Control Division

Premdor Entry Systems

ACCEPTANCE No.: 01-0314.19


APPROVED : JUN 05 2001

EXPIRES : April 02, 2006


NOTICE OF ACCEPTANCE: STANDARD CONDITIONS

1. Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
2. Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
3. Renewals of Acceptance will not be considered if:
 - a. There has been a change in the South Florida Building Code affecting the evaluation of the product and the product is not in compliance with the code changes.
 - b. The product is no longer the same product (identical) as the one originally approved.
 - c. If the Acceptance holder has not complied with all the requirements of this acceptance including the correct installation of the product.
 - d. The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
4. Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
5. Any of the following shall also be grounds for removal of this Acceptance:
 - a. Unsatisfactory performance of this product or process.
 - b. Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
6. The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
7. A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all time. The engineer needs not reseal the copies.
8. Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
9. This Notice of Acceptance consists of pages 1, 2 and this last page 3.

END OF THIS ACCEPTANCE

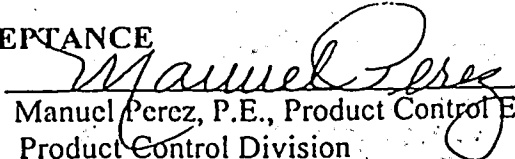
Manuel Perez, P.E., Product Control Examiner
Product Control Division

PREMDOR (ENTERGY BRAND) STEEL EDGE
SINGLE DOOR WITH SIDELITES IN
WOOD FRAME WITH BUMPER THRESHOLD
(OUTSWING)

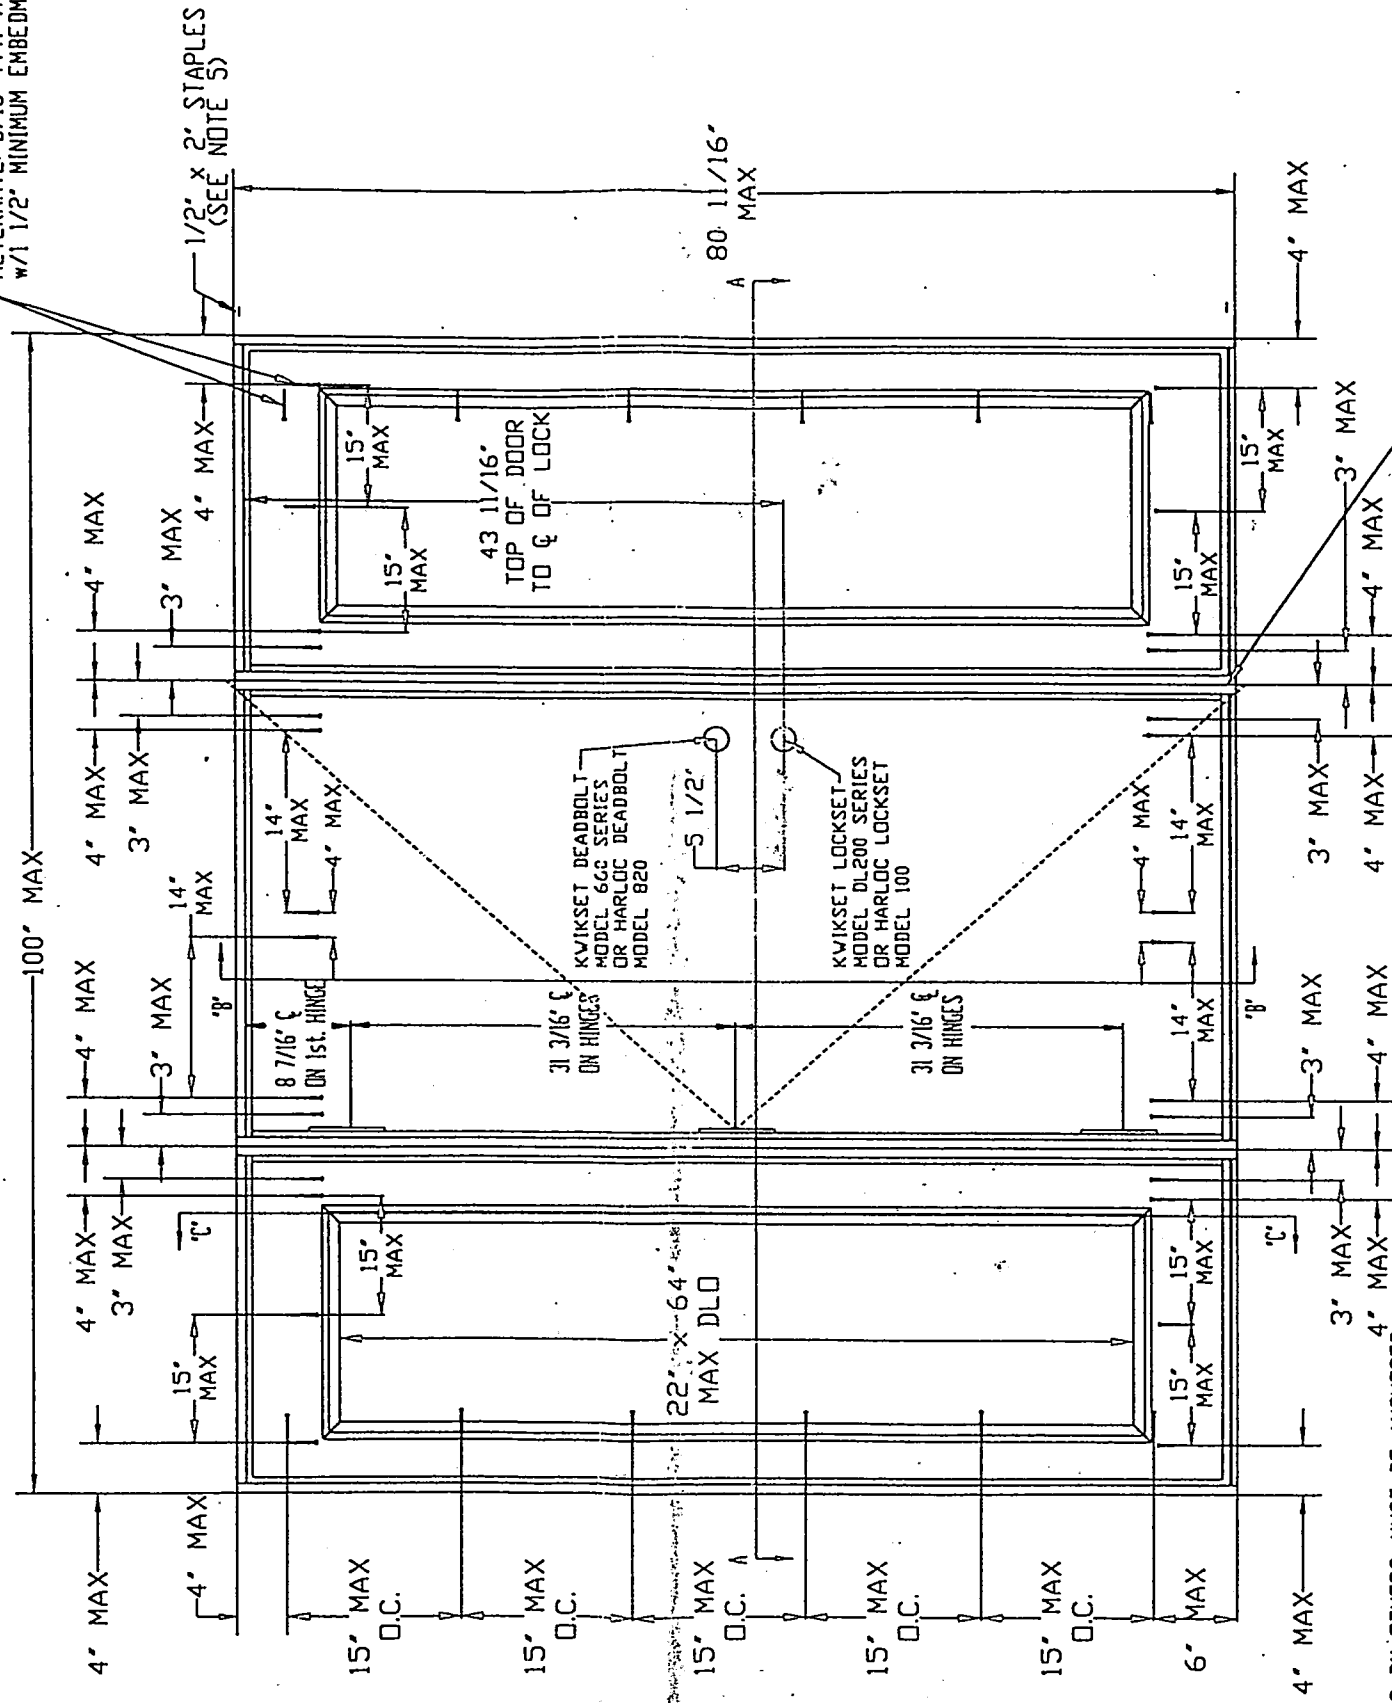

NOTES:

- 1.) WOOD BUCKS BY OTHERS, MUST BE ANCHORED PROPERLY TO TRANSFER LOADS TO THE STRUCTURE.
- 2.) THE PRECEDING DRAWINGS ARE INTENDED TO QUALIFY THE FOLLOWING INSTALLATIONS.
- A. WOOD FRAME CONSTRUCTION WHERE DOOR SYSTEM IS ANCHORED TO A MINIMUM TWO BY WOOD OPENING.
- B. MASONRY OR CONCRETE CONSTRUCTION WHERE DOOR SYSTEM IS ANCHORED TO A MINIMUM TWO BY STRUCTURAL WOOD BUCK.
- C. MASONRY OR CONCRETE CONSTRUCTION WHERE DOOR SYSTEM IS ANCHORED DIRECTLY TO CONCRETE OR MASONRY WITH OR WITHOUT A NON-STRUCTURAL ONE BY WOOD BUCK.
3. ALL ANCHORING SCREWS TO BE #10 WITH MINIMUM 1 1/2" EMBEDMENT INTO WOOD SUBSTRATE OR 3/16" PFH TAPCONS WITH 1 1/2" MINIMUM EMBEDMENT INTO MASONRY.
4. UNIT MUST BE INSTALLED WITH "MIAMI-DADE COUNTY APPROVED" SHUTTERS
5. THREE STAPLES PER SIDE JAMB INTO HEADER ON TOP AND DOOR, THREE STAPLES PER JAMB INTO BASE OF DOOR.
6. LATEX SEALANT TO BE APPLIED AT SIDE BY SIDE JAMBS AND SIDELITES.
7. DOOR/SIDELITE HEADER, DOOR/SIDELITE JAMBS, CORNERS ARE COPED AND BUTT JOINED.
8. DOORS SHALL BE PRE-PAINTED WITH A WATER-BASED INHIBITIVE PRIMER PAINT WITH A DRY FILM THICKNESS OF 1.5 MILS.
9. FRAMES SHALL BE PRE-PAINTED WITH AN ACRYLIC WATER-REDUCING WHITE PRIMER WITH A DRY FILM THICKNESS OF 1.5 MILS.

DESIGN PRESSURE RATINGS	
	WHERE WATER INFILTRATION REQUIREMENT IS NOT NEEDED
Positive	+55.0 psf
Negative	-76.0 psf


✱ UNITS SHALL BE INSTALLED ONLY AT LOCATIONS PROTECTED BY A CANDY OR OVERHANG SUCH THAT THE ANGLE BETWEEN THE EDGE OF CANDY OR OVERHANG TO SILL IS LESS THAN 45 DEGREES. UNLESS UNIT IS INSTALLED IN NON-HABITABLE AREAS WHERE THE UNIT AND THE AREA ARE DESIGNED TO ACCEPT WATER INFILTRATION.

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2007
BY Spawell
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO 06-0314.19

C	DATE COUNTY MODIFICATIONS		LJSM	JD
B	ADD RATINGS & REPAIR		R5	
A	ADD SECTIONS FROM JAWB TO T-HOLD		11-11-97	R.S.
	ADD NOTE A FOR STAPLES		01-01-97	R.S.
L12	REVISES		BAW	71
PW	MAKE ENERGY STEEL FORD			
PAV	FOR VEHICLE LIFE			

PREMDOR ENTRY SYSTEMS





31-1020-EM-D

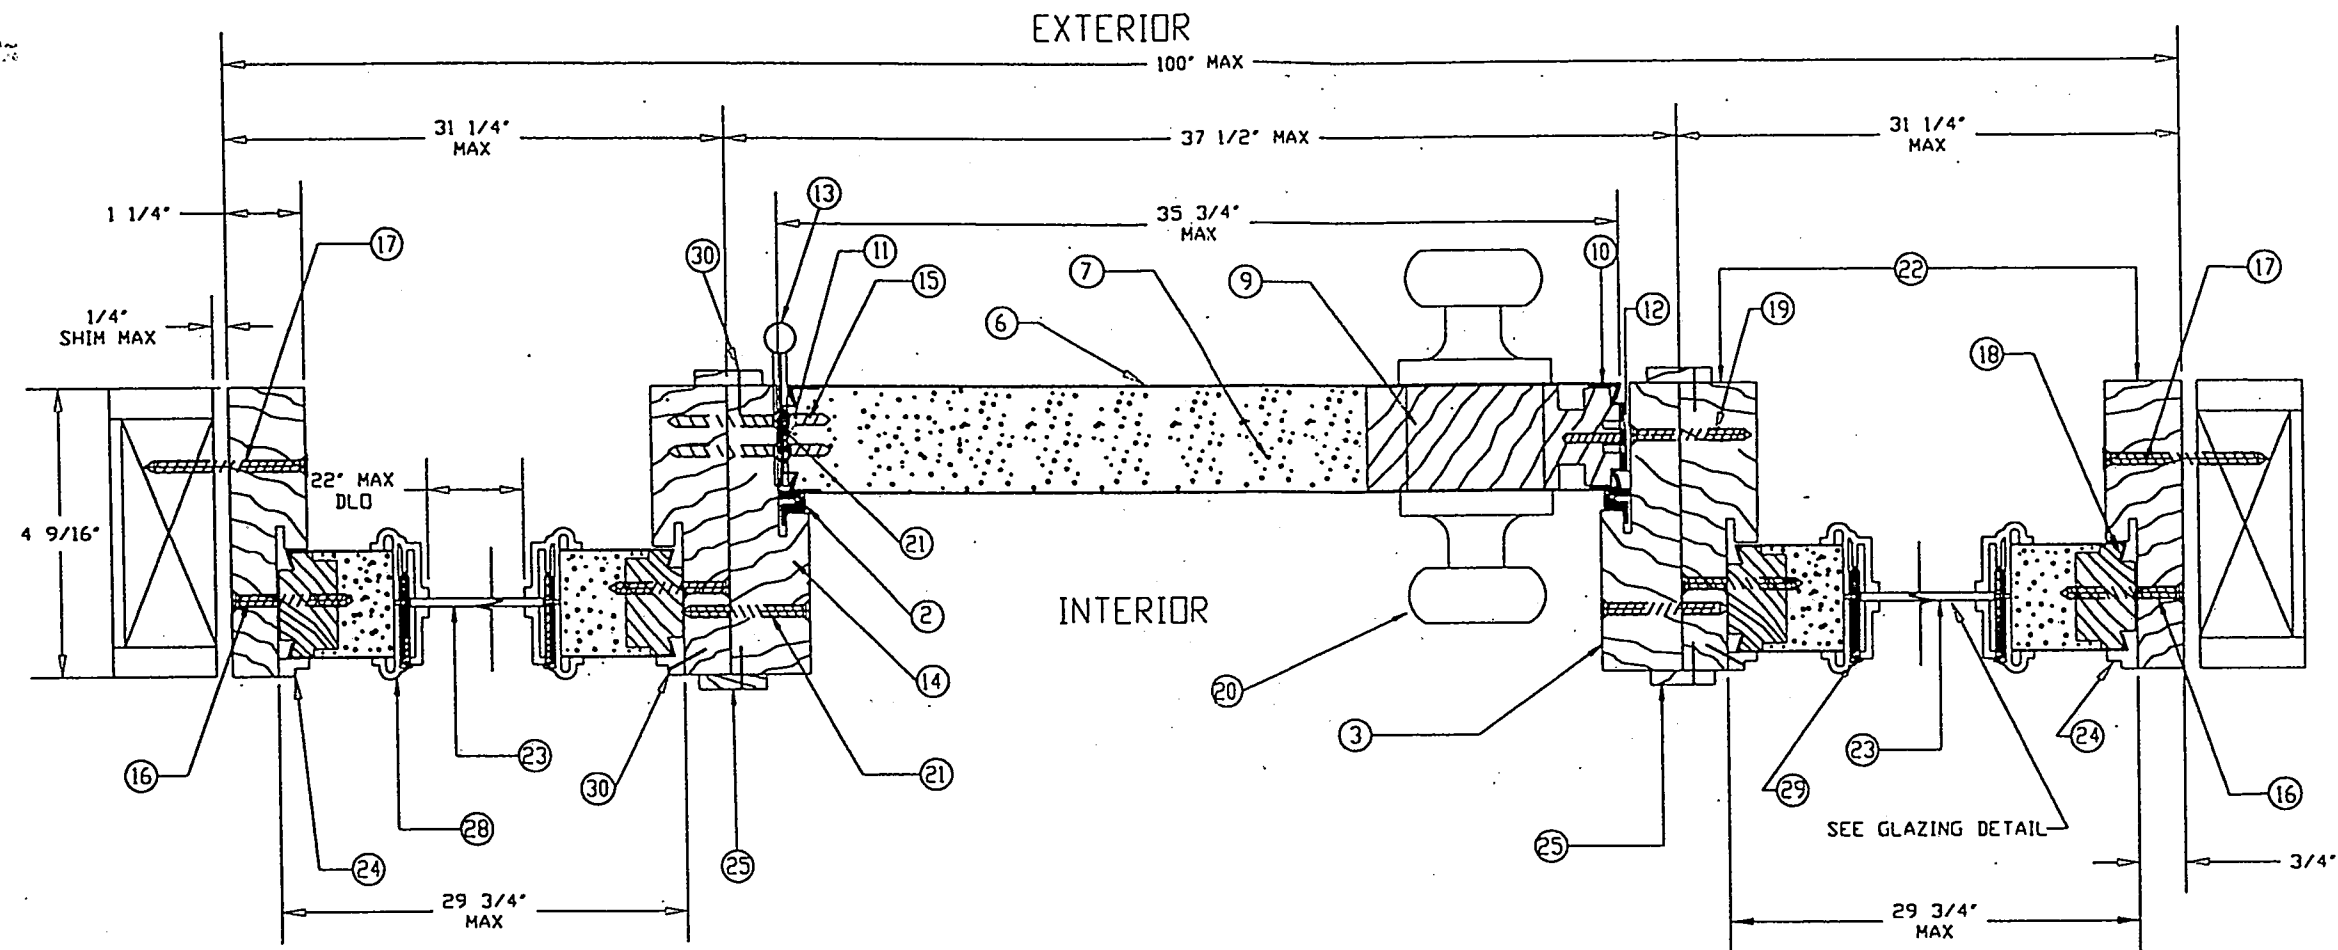

SECTION A-A OUTSWING

OTHER CONFIGURATIONS

GLAZING DETAIL

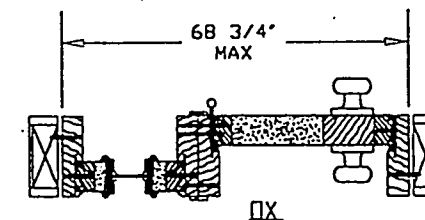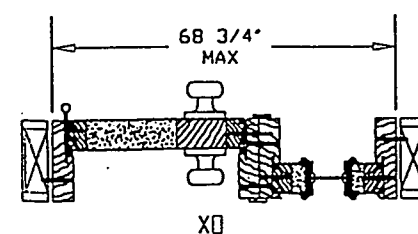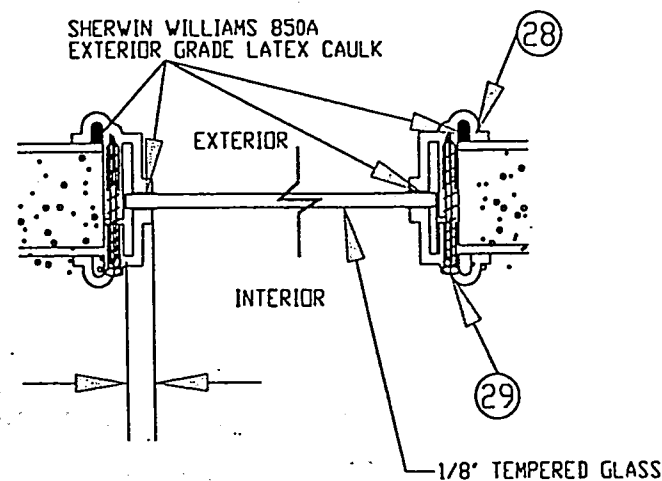


APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE **JUN 05 2001**
BY *Mauricio*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO **01-0314.19**

LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :	C	DADE COUNTY MODIFICATIONS	1/11/01	JL
EXTRUSIONS: UNLESS NOTED, STD. COMPL. TO U.S.	B	ADDED PAGE 5 (DOOR OPTIONS)	10-1-98	RS
ENGINEER:	A	ADD SCREWS TO LITE FRAMES & ADD OTHER DOOR CONFIGURATIONS	2-18-97	ML
DR. BY: R.S.	LIR	REVISIONS		
DATE: 7-29-97		PART NAME: ENERGY DOOR W/ Sidelites (A-A)	SCALE: NTS	
PREMDOR ENTRY SYSTEMS		31-1020-EM-0		
911 E. JEFFERSON		SHEET 2 OF 6		
PITTSBURG, KS 66762		REVISION LETTER C		

MATERIALS LIST

6

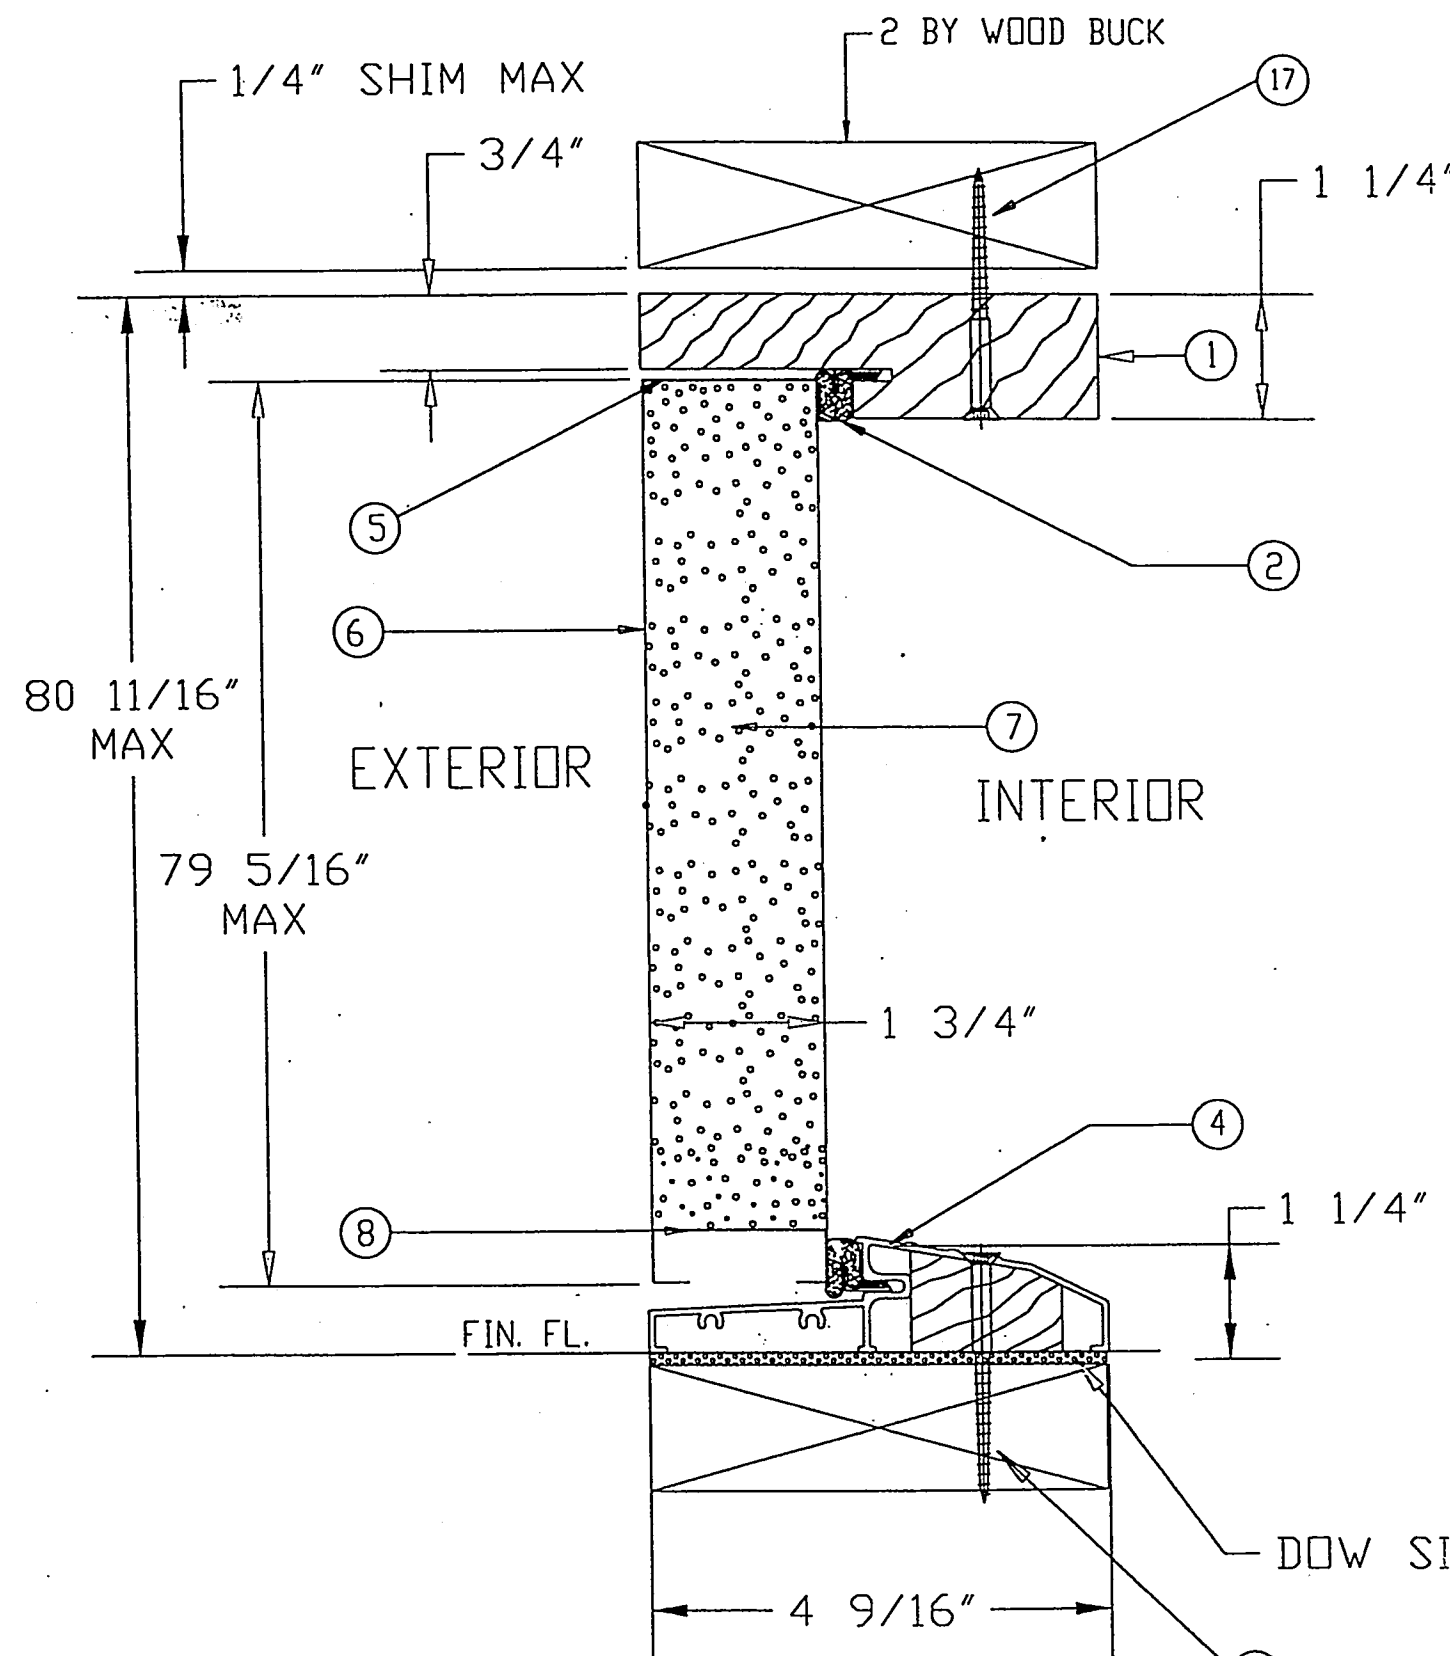


SECTION B-B

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2001
BY [Signature]
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314.19

ITEM NO.	DESCRIPTION	PART NUMBER	COMMENTS
①	WOOD HEAD JAMB	EM-14	1 1/4' X 4 9/16' MTL. TO BE PINE OR EQUIVALENT
②	COMPRESSION WEATHERSTRIP	EM-25	LOCKSCREEN BRAND LOXSEAL 9650 (BRONZE)
③	WOOD STRIKE JAMB	EM-12	1 1/4' X 4 9/16' MTL. TO BE PINE OR EQUIVALENT
④	ALUMINUM-BUMPER THRESHOLD	EM-15	PREMDOR BRAND OR EQUIVALENT - 1 1/4' x 4 9/16'
⑤	TOP CHANNEL	EM-08	PREMDOR BRAND - 1 11/16' - 20 GA STEEL
⑥	STEEL SKIN	26 ga. (.017 +.004 -.000)	MIN. YIELD STRENGTH 30,000 PSI MIN. THICKNESS PER TENSILE TEST REPORT IS .021"
⑦	POLYURETHANE FOAM CORE	BASF FOAM - DENSITY 2.0 TO 2.5 lbs./ft ³	
⑧	BOTTOM CHANNEL	EM-07	PREMDOR BRAND - 1 11/16' - 20 GA STEEL
⑨	WOOD LOCK BLOCK	EM-09	4' X 9 1/2' MTL. TO BE PINE OR EQUIVALENT
⑩	STRIKE STILE	EM-06	PREMDOR BRAND - 1 11/16' - 20 GA STEEL
⑪	HINGE STILE	EM-05	PREMDOR BRAND - 1 11/16' - 20 GA STEEL
⑫	LOCK PREP FILLER PLATE	EM-10	PREMDOR BRAND - .050' THICK- MTL. TO BE POLYETHYLENE
⑬	4'x4' HINGE	EM-16	HAGER BRAND HINGE OR EQUIVALENT - .097 THICK (STEEL)
⑭	WOOD HINGE JAMB	EM-13	1 1/4' X 4 9/16' MTL. TO BE PINE OR EQUIVALENT
⑮	#10-24 x 1/2' F.H.M.S.		(4) SCREWS PER HINGE INTO DOOR
⑯	#10 X 2' F.H.W.S.		(6) SCREWS THROUGH EACH SIDELITE JAMB INTO SIDELITE, 4' DOWN FROM TOP, MAX 15' O.C. THEREAFTER
⑰	#10 F.H.W.S. V/MINIMUM 1 1/2' EMBEDMENT OR 3/16' PFH TAPCONS V/MINIMUM 1 1/2' EMBEDMENT		REFER TO ELEVATION VIEW, FOR # OF SCREWS USED AND LOCATIONS
⑱	SIDELITE WOOD STILE	EM-26	15/16' X 1 11/16' MTL. TO BE PINE OR EQUIVALENT
⑲	#8 x 2' F.H.W.S.		(2) SCREWS AT EACH STRIKE PLATE
⑳	LOCKSET		KWIKSET BRAND 200 LOCK OR HARLOC BRAND 100 LOC
㉑	#10 x 1 3/4' F.H.W.S.		(4) SCREWS PER HINGE INTO DOOR (5) SCREWS THROUGH HINGE JAMB INTO SIDELITE JAMB, 8' DOWN FROM TOP, MAX 18' O.C. THEREAFTER (5) SCREWS THROUGH STRIKE JAMB INTO SIDELITE JAMB, 4' DOWN FROM TOP, MAX 8' O.C. THEREAFTER
㉒	WOOD SIDELITE JAMB	EM-19	1 1/4' X 4 9/16' MTL. TO BE PINE OR EQUIVALENT
㉓	22' X 64' SINGLE PANEL GLASS	EM-20	TEMPERED GLASS IN POLYPROPYLENE FRAME- DC-1643 - (ODL-1/8" CLEAR TEMPERED GLASS)
㉔	SIDELITE TRIM (WOOD)	EM-21	5/16' x 1/2' MTL. TO BE PINE OR EQUIVALENT
㉕	WOOD CASING	EM-22	1/8' x 1' MTL. TO BE PINE OR EQUIVALENT - ITEMS ARE MOLDINGS USED FOR "SIDE BY SIDE JAMBS" AS MULLIONS
㉖	WOOD SIDELITE HEAD JAMB	EM-23	1 1/4' X 4 9/16' MTL. TO BE PINE OR EQUIVALENT
㉗	WOOD SIDELITE BASE	EM-24	1 1/4' X 4 9/16' MTL. TO BE PINE OR EQUIVALENT
㉘	POLYPROPYLENE LITE FRAME	DC-1643, ODL-2	HP Polypropylene by ODL
㉙	#6 X 1 1/2' PAN HEAD SCREWS		18 PER FRAME SCREW SPACING TO BE 3' IN FROM EACH CORNER AND TO EXCEED 14' OC THEREAFTER.
㉚	PIN NAIL		3/4' LONG NAIL, 4' IN FROM END, MAX 8' O.C. THEREAFTER, USED ON MULLIONS AND T

DOW SILICONE #995

LIMITS: UNLESS NOTED, FRAC. :	DEC. :	ANG. :	B	DADE COUNTY MODIFICATIONS	1/11/01	JD
EXTRUSIONS: UNLESS NOTED, STD. COM'L. TOL'S.			A	ADDED PAGE 5 (DOOR OPTIONS)	10-1-98	RS
ENGINEER:			LTR.	REVISIONS	DATE	BY
DR. BY R.S.	DATE 7-29-97			PART NAME: ENTERGY STEEL EDGE DOOR (B-B)		
PREMDOR ENTRY SYSTEMS			MAT'L:		SCALE:	
911 E. JEFFERSON						
PITTSBURG, KS. 66762						
					31-1020-EM-0	
					SHEET 3 OF 6	
					REVISION LETTER B	

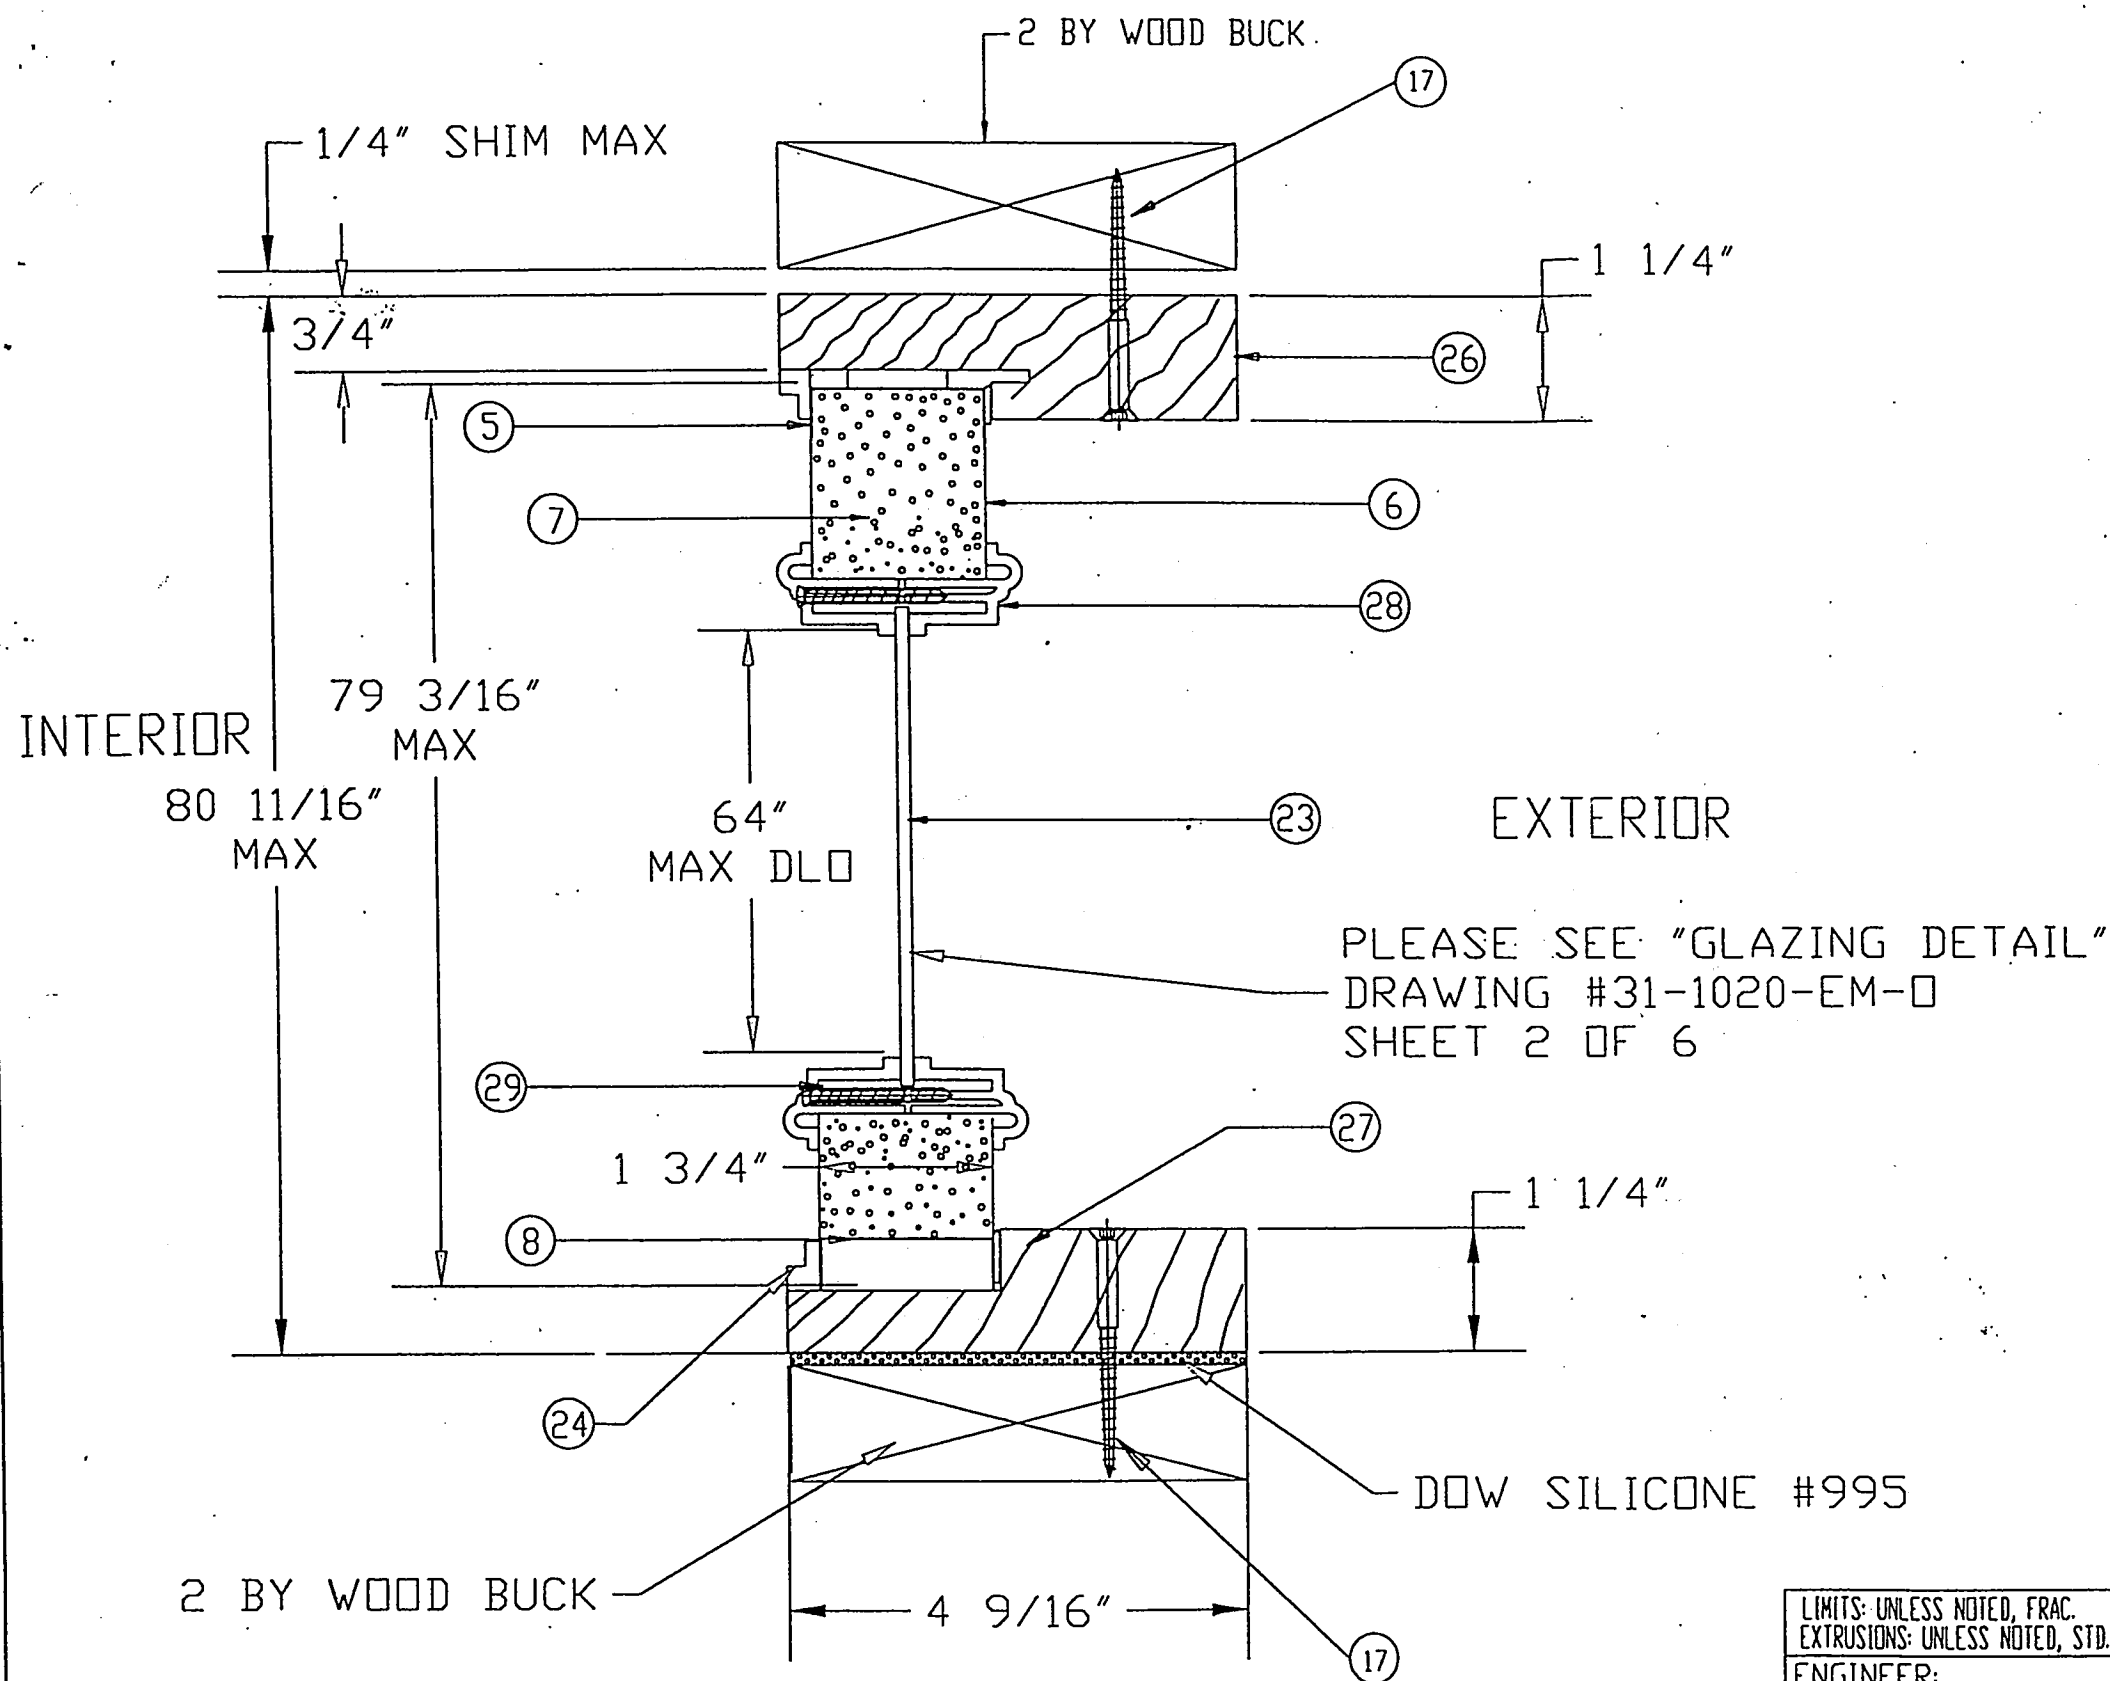

SECTION C-C

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2001
BY Manuel Cruz
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314.19

LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :
EXTRUSIONS: UNLESS NOTED, STD. COM'L. TOL'S.

ENGINEER:

DR. BY R.S. DATE 7-29-97

PREMDOR ENTRY SYSTEMS
911 E. JEFFERSON
PITTSBURG, KS. 66762

D	DADE COUNTY MODIFICATIONS	1/11/01	JD
C	MATERIAL WAS POLYSTYRENE	6-2-99	RS
B	ADDED PAGE 5 (DOOR OPTIONS)	10-1-98	RS
A	ADD SCREWS TO LITE FRAME & MATERIAL LIST	12-18-97	R.S.
LTR.	REVISIONS	DATE	BY
PART NAME: ENTERGY STEEL EDGE SIDELITE (C-C)			
MAT'L:		SCALE:	

31-1020-EM-0
SHEET 4 OF 6

REVISION LETTER D

OTHER DOOR PANEL STYLES

79 5/16" MAX

BLANK TOP
4-PANEL

36" MAX

6-PANEL

4-PANEL

9-PANEL

10-PANEL

18-PANEL

FLUSH

8-PANEL

CROSSBUCK

12-PANEL

4-PANEL
EYEBROW

5-PANEL
W/SCROLL

5-PANEL
EYEBROW
W/SCROLL

5-PANEL

5-PANEL
EYEBROW

OTHER SIDELITE STYLES

79 3/16" MAX

SL-10

30" MAX

SL-20

SL-30

SL-60

SL-50

SL-50B

SL-69A

SL-69B

SL-69C

SL-25

SL-55

SL-30D

SL-40

SL-90A

SL-90B

SL-90C

SL-30B

SL-30C

SL-70

SL-80

PD-1

PD-2

PD-3

PD-4

PD-5

PD-6

PD-7

PD-8

PD-9

PD-10

PD-11

PD-12

PD-13

PD-14

PD-15

PD-16

PD-17

PD-18

PD-19

PD-20

PD-21

PD-22

PD-23

PD-24

PD-25

PD-26

PD-27

PD-28

PD-29

PD-30

PD-31

PD-32

PD-33

PD-34

PD-35

PD-36

PD-37

PD-38

PD-39

PD-40

PD-41

PD-42

PD-43

PD-43A

PD-43B

LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :			
EXTRUSIONS: UNLESS NOTED, STD. COMPL. TOL'S.			
ENGINEER:		LTR.	REVISIONS
DR. BY J.D.		DATE 1/15/01	
PREMDOR ENTRY SYSTEMS		PART NAME: PREMDOR DOOR OPTIONS	
911 E. JEFFERSON		SCALE:	
PITTSBURG, KS. 66762		31-1020-EM-0	
		SHEET 6 OF 6	
		REVISION LETTER	

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2007
BY *Manuel Carr*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314-19

TO: THE COUNTY OF LEE, STATE OF FLORIDA

10/07/03

The undersigned applicant hereby applies for a permit and hereby agrees to comply with Lee County Land Development Code requirements, and all provisions of the Laws of the State of Florida, and all regulations relating, or applying to Building, Plumbing and Electrical work. A copy of plans and specifications must be kept at building during progress of work. Owner agrees to furnish culvert for driveway if required.

STRAP No.35-45-23-13-00000.0790
Type of Permit: Single Family
Permit No.RES2003-08595
Owner Name: ANTONOVITZ FRANK A +

Owner Telephone:
Owner Address: 1428 EAST JEFFESON

Project Name: CALOOSA CREEK

Description: SFR

Job Address: 15656 CALOOSA CREEK CIR

Master No.:
Directions to Job: CALOOSA CREEK / SOUTH ON MCGREGOR RIGHT ON JOHN MORRIS RD **466-3955

Contractor: CGC034850 DANIEL WAYNE HOMES INC

Contractor Address: P O BOX 08370

All contractors and subcontractors shall comply with Florida Statute 489 and the Lee County ordinance regulating contractor licenses.

Front Width: 95.0 ft	Rear Width: 0.0 ft	Average Depth: 150.0 ft	Area: 0.0 acres
Setbacks: Front: 25.0 ft	Right Side: 15.0 ft	Left Side: 14.0 ft	Rear: 39.5 ft
Zoning: RPD		Coastal Zone:	Flood Zone:
Elevation: 0 ft		FEMA Required:	Building Valuation: \$ 260,000
Living Area: 3,844 sq ft	Outside Area: 1,449 sq ft	Building Height: 18 ft	Stories: 1
Number of Amps: 200	Upgrade:	Number of Meters: 0	
Relocate:	Number of Pedestals: 0	Engineering:	
Type of Mechanical Permit:		No. of Compressors: 0	No. of Exhaust Hoods: 0
New / Replace:	Interior / Exterior:	Living Area: 3,844 sq ft	
Type of Plumbing Permit: Plumbing		Type of Septic Permit:	HRS No.:
Type of Roof Permit: Metal		Fire Value: \$ 0	Fire Master No.:
Type of Fire Permit:			
Item:	Qty:		

Fees:	Impact Fee Type:
Plan Review \$25.00	Community PK Admin Fee \$15.06
Administration \$19.22	Community Park \$655.00
Radon \$19.22	Regional PK Admin Fee \$10.60
ELE New Const & Add/Renovation \$40.00	EMS \$30.00
Shutter Permit \$35.00	Fire \$387.00
MEC New const., additions & \$76.88	EMS Admin Fee \$0.69
New Bldg Construction & Addn \$384.40	Fire Admin Fee \$8.90
PLU New const & add./renov. \$76.88	Regional Park \$461.00
PLU Sewer \$35.00	Road \$2,436.00
ROF Residential - Roof \$35.00	SCHOOL IMPACT FEE \$2,232.00
Total Permit Fees: \$746.60	SCHOOL IMPACT ADMIN FEE \$51.34
Amount Paid: \$25.00	Road Admin Fee \$56.03
	Total Impact Fees: \$6,343.62
	Amount Paid: \$0.00
Total Fee Amount: \$7,090.22	
Total Amount Paid: \$25.00	
Total Amount Due 7,065.22	

THIS PERMIT IS VOID IF THE FIRST INSPECTION IS NOT MADE WITHIN SIX (6) MONTHS FROM THE DATE ISSUED OR IF NO INSPECTION HAS BEEN MADE FOR A PERIOD OF SIX (6) MONTHS FROM THE MOST RECENT PASSED INSPECTION. PERMIT IS VOID IF ZONING CLASSIFICATION IS VIOLATED. APPLICANT AGREES TO COMPLY WITH THE SANITARY REGULATIONS AND UNDERSTANDS THAT THE PROPOSED STRUCTURE MAY NOT BE USED OR OCCUPIED UNTIL AN APPROVED CERTIFICATE OF OCCUPANCY IS ISSUED. APPLICANT FURTHER UNDERSTANDS THAT FAILURE TO OBTAIN PERMIT OR MISREPRESENTATION OF THE IMPROVEMENTS IS A MISDEMEANOR AND UPON CONVICTION, APPLICANT CAN BE PUNISHED AS PROVIDED BY LAW.

FAILURE TO COMPLY WITH MECHANICS LIEN LAW CAN RESULT IN THE PROPERTY OWNER PAYING TWICE FOR IMPROVEMENTS.

I hereby certify that to the best of my knowledge, the information submitted for this permit is true and correct, and complies with Deed of Restrictions.

Owner: _____

Contractor: _____





COMMUNITY DEVELOPMENT TEMPORARY POWER ELECTRICAL AGREEMENT

BUILDING PERMIT NO. RES2003-08595

THIS AGREEMENT is between DANIEL WAYNE HOMES INC, LEE COUNTY, a political subdivision of the State of Florida, and FP&L or LCEC.

WHEREAS, the APPLICANT has constructed a SFR known as CALOOSA CREEK, located at 15656 CALOOSA CREEK CIR Lee County, Florida; and

WHEREAS, the APPLICANT needs an approved electrical inspection at the location above to obtain a permanent Certificate of Occupancy; and

WHEREAS, the location above must be supplied with the temporary electrical power by the POWER COMPANY for the Division of Development Services (DIVISION) or other agencies to perform an electrical inspection and test certain electrical equipment; and

WHEREAS, the APPLICANT desires to have the COUNTY authorize the POWER COMPANY to supply electricity for the sole purpose of the DIVISION or other agencies conducting their final inspections; and

WHEREAS, a lawfully licensed Master Electrician (MASTER ELECTRICIAN) will ensure that supplying electricity to the electrical wiring and equipment at the location above will be safe:

NOW THEREFORE, in consideration of the foregoing and the mutual promises herein, the COUNTY authorizes the POWER COMPANY to supply temporary electrical power to the APPLICANT's location above and in further consideration of the POWER COMPANY providing temporary electrical power at the location above, it is agreed:

1. By the APPLICANT and CONTRACTOR that the temporary electrical power authorized by this Agreement and supplied by the POWER COMPANY is of limited duration.
2. By the POWER COMPANY to not disconnect the temporary electrical power supplied to the location above before 5:00 p.m. on the date last set forth above.
3. By the APPLICANT and CONTRACTOR to indemnify and hold harmless both the COUNTY and the POWER COMPANY in regard to any injury, be it personal or injury to property, that may occur as the result of temporary electrical power being supplied to the location above.
4. By the APPLICANT and CONTRACTOR to waive any statutory right or other right adopted by administrative rule with regard to termination of temporary electrical power at the location above.
5. By the APPLICANT and CONTRACTOR to waive any right to judicial relief or other legal enforcement that may arise from automatically disconnecting the temporary electrical power provided by the POWER COMPANY.
6. By the undersigned MASTER ELECTRICIAN, on behalf of the APPLICANT, that the wiring apparatus or fixtures of each structure at the location above are in such condition that electricity supplied by the POWER COMPANY may be safely connected, for the purpose of electrical inspection, but specifically does not certify that the wiring, apparatus of fixtures in any structure at the location above are in such condition that the structure(s) may be safely occupied.

"Under penalties of perjury, I declare that I have read the foregoing [document] and that the facts stated in it are true."

DANIEL WAYNE HOMES INC

CGC034850

Print Contractor's name and license number


Contractor Signature

Date Issued

fpower.rpt

COMMUNITY DEVELOPMENT
RESIDENTIAL BUILDING PERMIT
APPLICATION

Date 9-15-03
Tech AV
Ref# RES2003-08595

TO BE COMPLETED BY APPLICANT:

PROP. OWNER Antonovitz CON. BUS. NAME Daniel Wayne Homes, Inc.
STRAP # 35-45-23-13-00000.0790 CONTACT PERSON Chasity Stafford
LOT 79 BLK UNIT MAILING ADDRESS 12860 Banyan Creek Dr.
D.O. # Fort Myers FL 33908
SUBDIVISION Caloosa Creek PHONE # 466-3955 FAX # 466-9486
JOB ADDRESS: 15656 Caloosa Creek Circle LICENSE # CGC 034850
PERMIT REQUESTED SFR

*****DO NOT WRITE BELOW THIS

LINE*****

DIRECTIONS TO JOB South on McGregor
Right on John Morris Road

CONST. VALUE \$ 260,000 SQ. FT. 2395
SUB INFORMATION

Elec. Amps: 200 Plumbing: (Y) / N
Roof Type Metal / A/C: Duct Only Y / (N)
A/C: Seer 10.00 KW 15 Tons 4
County Maintained Rd? Y / (N) Sgl / Dbl
LP Gas: Y / (N) Fire Sprinklers/Alarm: Y / (N)
Aluminum: Y / (N) Master # n/a
Const. Details Mstrd? Y / (N) Master # n/a
Flood Zone: (Y) / N Coastal Zone Y / (N)

*****DO NOT WRITE BELOW THIS LINE*****

TECHNICIAN	W/B	Y	N
Recorded Warranty Deed	-	-	✓
Building Addendum	✓	✓	-
Notice of Commencement	✓	-	✓
O/B Disclosure	-	✓	-
Impact Letter	-	✓	-
Sewer/Septic # <u>204</u>	-	✓	-
Water Well # <u>204</u>	-	✓	-
Deemed to Comply Checklist	-	✓	-
Sealed Plans	-	✓	-
Sealed Survey	-	✓	-
Site Plans	-	✓	-
Construction Drawings	-	✓	-
Energy Calculations + Cover Sheet	-	✓	-
Truss/Roof Layout	-	✓	-
Duplex Firewall Sec.	-	✓	✓
Typical Wall Sec.	-	✓	-
Plumb./Elec. Layout	-	✓	-
Mitered and/or Fixed Glass Detail	-	-	-

89 58-012.0015
DOS 2000-60235

PLAN REVIEW
Date App'd 9/30/03 App'd by BFB
SBC Occupancy Class 23
Type of Const. 18 Bldg. Area 3844
Bldg. Height 18 # Stories 1
Lin. Ft. 1 # Units 1
Radon Exempt Y / N Flood Exempt Y / N

PROPOSED CONSTRUCTION VALUATION

L.A. 2395 Sq.Ft. @ \$ 67 /Sq.Ft. = \$ 160465
O.A. 1449 Sq.Ft. @ \$ 38 /Sq.Ft. = \$ 55062
Total Value = \$ 215527

Construction Contract Price \$ 1

DSL D Value \$ Year

Appraised Building Value \$ Year

PERMIT FEES

Gross Floor Area 3844
Bldg. Permit Fee \$ 38440
Fire Sprinkler \$ 1600
Fire Alarm \$ 40
LP Gas \$ 35
Sewer \$ 35
Drive \$ 7600
HVAC \$ 7600
Permit Fees Sub Total \$ 39

IMPACT FEES

Community Parks \$ 6343.62
EMS \$ 192/192
Fire \$ 7065.2
Regional Parks \$ 192/192
Roads \$ 7065.2
Impact Sub Total \$ 192/192
Radon/Admin \$ 7065.2
TOTAL FEES DUE \$ 7065.2

ZONING REVIEW

Date 9-24-03
Zoning RPD
Flood Zone A10 E1 9
Coastal Building Zone Y / (N)
Coastal Const. Line 10
Coastal Letter Sent 10
Lot Size 75 X 150

Fire District IMF
Road Class: local / private / corner
PB/OR/DB 72 Page 8-12
Land Use/Soil Sub 1 / 25
Hold Date 10/15/03
Add'l Forms 10/15/03
Exempt. / Var. / Hear. 10/15/03

By EA
Min. Req. Setbacks 25/7.5/2.5/20
Actual Setbacks 25/14/15/39.5
7065.2

20-31-19
2020-808035
BUILDING PERMIT APPLICATION ADDENDUM

(MUST BE COMPLETED IF CONSTRUCTION VALUE IS \$2500.00 OR MORE)

Fee Simple Titleholder's Name (if other than owner) n/a
Fee Simple Titleholder's Address n/a
Bonding n/a
Bonding Company's Address n/a
Architect/Engineer's Name Alpha Engineering
Architect/Engineer's Address 6315 Presidential Court, Suite C, Fort Myers, FL 33919
Mortgage Lender's Name n/a
Mortgage Lender's Address n/a

This application is for a permit to do the work and installation indicated. No work or installation has commenced prior to the issuance of a permit and all work will be performed to meet the standards of all laws regulating construction in this jurisdiction. I understand that a separate permit must be secured for **(ELECTRICAL WORK, PLUMBING, SIGNS, WELLS, POOLS, FURNACES, BOILERS, HEATERS, TANKS AND AIR CONDITIONERS, ETC.)** The foregoing information is accurate, the county has been advised of all easements on the property and all work will be done in compliance with all applicable laws regulating construction and zoning.

Under penalties of perjury, I declare that I have read the foregoing Building Permit Application Addendum and that the facts stated in it are true.

Signature (owner/authorized agent) Chasity Stafford Date 9/15/03
Printed Name Chasity Stafford

OWNER BUILDER DISCLOSURE STATEMENT

State law requires construction to be done by licensed contractors. You have applied for a permit under an exemption to that law. The exemption allows you, as the owner of your property, to act as your own contractor even though you do not have a license. You must supervise the construction yourself. You may build or improve a one-family or two-family residence or a farm outbuilding. You may also build or improve a commercial building at a cost of \$25,000 or less. The building must be for your own use and occupancy. It may not be built for sale or lease. If you sell or lease a building you have built yourself within one (1) year after the construction is complete, the law will presume that you built it for sale or lease, which is a violation of this exemption. It is your responsibility to make sure that people employed by you have licenses required by state law and by county or municipal licensing ordinances. Any person working on your building who is not licensed must work under your supervision and must be employed by you, which means that you must deduct F.I.C.A. and with-holding tax and provide worker's compensation for that employee, all as prescribed by law. Your construction must comply with all applicable laws, ordinances, building codes and zoning regulations. I have read and understand the foregoing Disclosure Statement.

Under penalties of perjury, I declare that I have read the foregoing Owner Builder Disclosure Statement and that the facts stated in it are true.

Signature (owner/authorized agent) _____ Date _____
Printed Name _____



RETURN TO: DANIEL WAYNE HOMES, INC.
12860 BANYAN CREEK DRIVE, FORT MYERS, FL 33908

THIS INSTRUMENT PREPARED BY: CHASITY STAFFORD
DANIEL WAYNE HOMES, INC.
12860 BANYAN CREEK DRIVE, FORT MYERS, FL 33908

INSTR # 5994824
Official Records BK 04081 PG 0373
RECORDED 10/03/2003 10:36:07 AM
CHARLIE GREEN, CLERK OF COURT
LEE COUNTY
RECORDING FEE 6.00
DEPUTY CLERK J Miller

PROPERTY APPRAISERS PARCEL IDENTIFICATION (FOLIO) NUMBER: 35-45-23-13-00000.0790

NOTICE OF COMMENCEMENT

PERMIT # _____

STATE OF FLORIDA
COUNTY OF Lee

The undersigned hereby gives notice that improvements will be made to certain real property, and in accordance with section 713.13 of the Florida Statutes, the following information is provided in this NOTICE OF COMMENCEMENT.

Legal description of property (Includes Street Address, if available) Lot #79 Caloosa Creek
15656 Caloosa Creek Circle, Fort Myers, FL 33908

General Description of Improvements Single Family Residence with Screen Enclosure

Owner Frank & Carolyn Antonovitz Address 1428 Jefferson Blvd., South Bend, IN 46617

Owners Interest in site of the Improvement 100%

Fee Simple Title Holder (if other than Owner) n/a

Name n/a Address n/a

Contractor Daniel Wayne Homes, Inc. Address 12860 Banyan Creek Dr., Ft Myers, FL 33908

Surety n/a Address n/a Amount of Bond n/a

Any person making a loan for the construction of the Improvements:

Name n/a Address n/a

Person within the State of Florida designated by Owner upon whom notices or other documents may be served as provided by Section 713.13 (a) 7., Florida Statutes.

Name & Address n/a

In addition to himself, owner designates n/a

To receive a copy of the Lienor's Notice as provided in Section 713.13 (1)(b), Florida Statutes.
Expiration date of Notice of Commencement (the expiration date is one year from the date of recording unless a different date is specified).

Frank A. Antonovitz
Signature of Owner

Frank A. Antonovitz
Printed Signature of Owner

CHRISTINE L. NEWCOMER, Notary Public
A Resident of St. Joseph County, IN
My Commission Expires 9-10-07

I have relied upon the following
identification of the Affiant Frank A. Antonovitz
or personally known by me,
sworn to and subscribed before me this
2nd day of October 2003.

Christine L. Newcomer
Notary Signature

Christine L. Newcomer
Printed Notary Signature

Lee County Utilities Water/Sewer Service Fee Receipt

09/15/03**STRAP No.:** 35-45-23-13-00000.0790**Type of Service Combination****Case No.:** LWS2003-01969**Owner Name:** RISTOW DOROTHY K TR**Owner Telephone:****Owner Address:** 222 CHESHIRE CT**Project Name:****Description:** DROP IN 5/8 INCH METER WATER & SEWER
PREPAID CAPACITY FEES**Job Address:** 15656 CALOOSA CREEK CIR**Subdivision** CALOOSA CREEK**Lot:** 79**Block:****Contractor/Agent:** DANIEL WAYNE HOMES INC.**Mailing Address:** 12860 BANYAN CREEK
FORT MYERS FL 33908**Directions**

Fees:

Drop-In Meter Size 5/8"	\$125.00
Sewer Deposit Single Family	\$70.00
Water Deposit Single Family	\$45.00
Total Fee Amount:	\$240.00
Total Amount Paid:	\$240.00
Total Amount Due	0.00

TO GUARANTEE THE PAYMENT OF ANY AND ALL INDEBTEDNESS FOR WATER AND/OR SEWER SERVICES WHICH MAY BE OR BECOME DUE TO UTILITIES DEPARTMENT (HEREINAFTER CALLED THE DEPARTMENT) BY SAID CUSTOMER. CUSTOMER AGREES THAT SUCH DEPOSIT OR ANY PART THEREOF MAY BE APPLIED BY THE DEPARTMENT AT ANY TIME IN SATISFACTION OF SAID GUARANTEE. THAT AFTER SUCH APPLICATION THE REMAINDER THEREOF MAY BE APPLIED IN DISCHARGE OF ANY INDEBTEDNESS OF THE CUSTOMER TO THE DEPARTMENT WHATSOEVER AND THAT THE DEPARTMENT MAY USE SAID DEPOSITS AS IF THE DEPARTMENT WERE THE ABSOLUTE OWNER THEREOF, UPON DISCONTINUANCE OF ANY OR ALL SERVICES COVERED BY THIS DEPOSIT, AND THE PRESENTATION OF THIS RECEIPT AND PROPER IDENTIFICATION IF REQUIRED. THE DEPARTMENT AGREES TO REFUND TO THE CUSTOMER THAT PORTION OF THE DEPOSIT APPLYING TO THE SERVICE OR SERVICES DISCONTINUED, LESS ANY AMOUNTS THEN DUE THE DEPARTMENT.

THIS DEPOSIT SHALL NOT PRECLUDE THE DEPARTMENT FROM DISCONTINUING FOR NONPAYMENT ANY AND ALL SERVICES COVERED BY THIS DEPOSIT REGARDLESS OF THE SUFFICIENCY OF SAID DEPOSIT TO COVER SUCH INDEBTEDNESS FOR SUCH SERVICES.


RENDERING OF SERVICES COVERED BY THIS DEPOSIT RECEIPT IS SUBJECT TO CLEARANCE FROM OUR ENGINEERING AND ACCOUNT DEPARTMENTS.

1. I HEREBY REQUEST AND AUTHORIZE LEE COUNTY UTILITIES DEPARTMENT TO SUPPLY WATER AND/OR SEWER SERVICE TO THE ABOVE DESCRIBED PROPERTY UNTIL RECEIPT OF FORMAL NOTICE FROM ME REQUESTING DISCONTINUANCE OF SUCH WATER AND/OR SEWER SERVICE
2. I AGREE TO PROMPTLY PAY FOR SAID WATER AND/OR SEWER SERVICE AT THE RATES ESTABLISHED BY THE LEE COUNTY UTILITIES DEPARTMENT AND WITHIN THE TIME PERIODS DELINEATED IN THE DEPARTMENT OF LEE COUNTY UTILITIES OPERATIONS MANUAL.
3. I HEREBY AGREE TO ABIDE BY THE RULES AND REGULATIONS APPLICABLE TO SAID WATER AND/OR SEWER SERVICE AS DELINEATED IN THE DEPARTMENT OF LEE COUNTY UTILITIES OPERATIONS MANUAL.

Owner/Contractor: _____ **Identification:** _____

SURVEY PLAT

OF
LOT 79, CALOOSA CREEK
AS RECORDED IN PLAT BOOK 72, PAGES 8 THROUGH 12
SECTION 35, TOWNSHIP 45 SOUTH, RANGE 23 EAST,
LEE COUNTY, FLORIDA

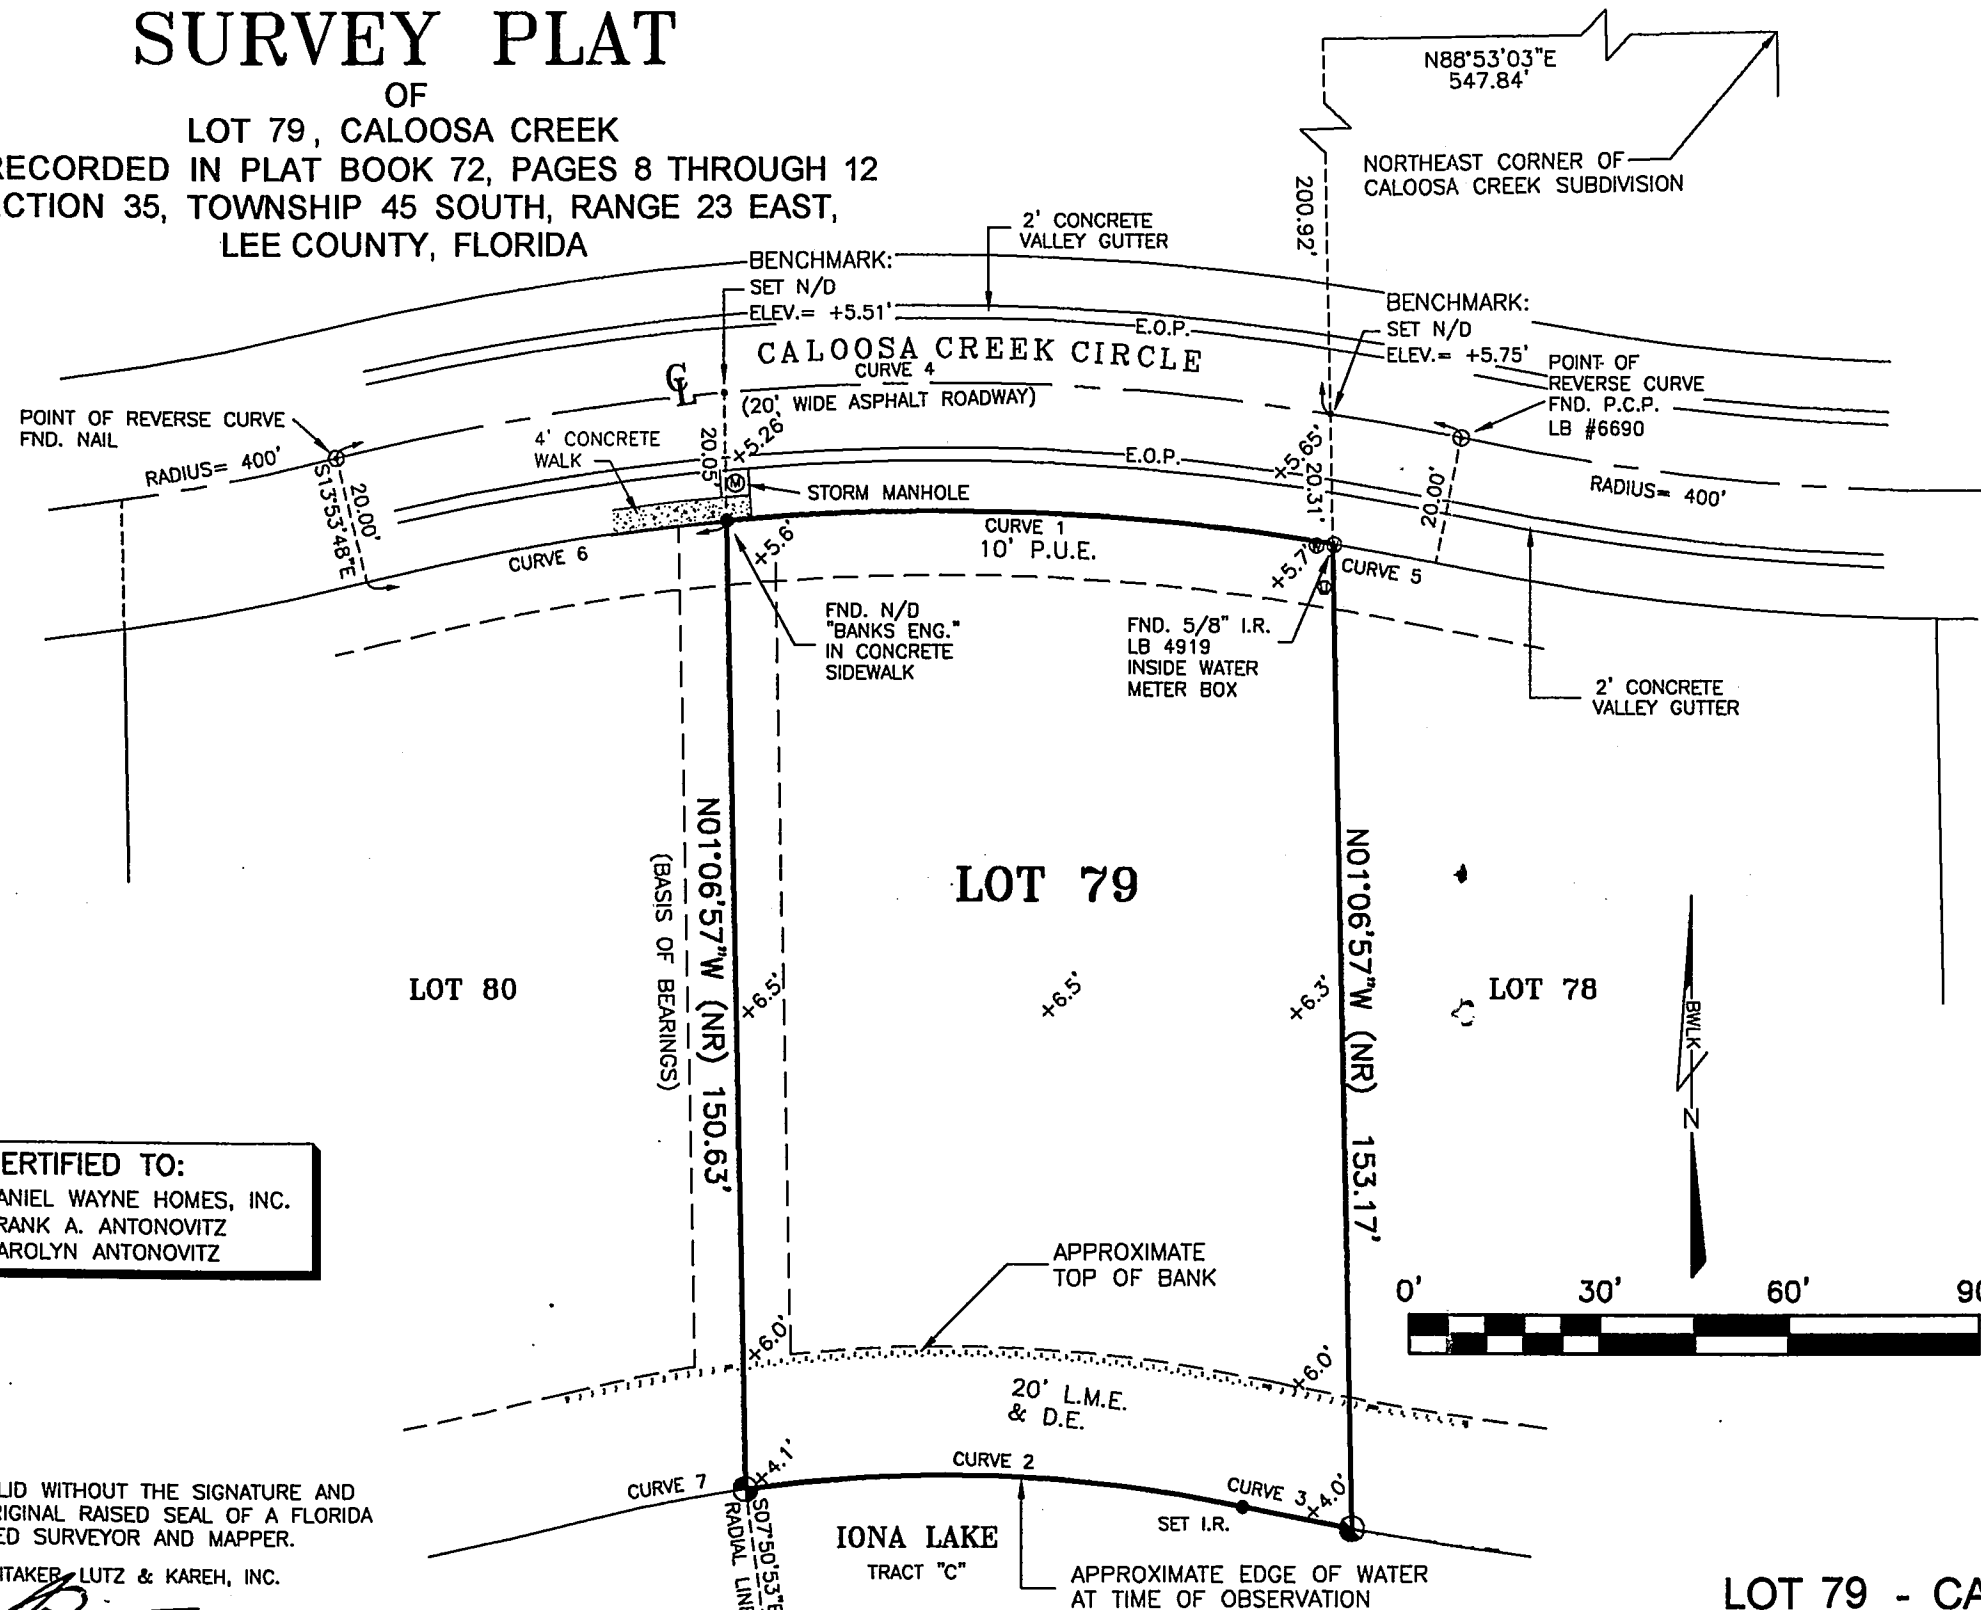

NOTES:

SURVEY BASED ON THE PLAT OF CALOOSA CREEK, AND FOUND MONUMENTATION.
DIMENSIONS ARE IN FEET AND DECIMAL PARTS THEREOF.

ELEVATIONS ARE BASED ON N.G.V.D. OF 1929 AND U.S.C.&G.S. BENCHMARK H-240.

PARCEL SUBJECT TO EASEMENTS, RESTRICTIONS, RESERVATIONS AND RIGHTS-OF-WAY
(RECORDED AND UNRECORDED, WRITTEN AND UNWRITTEN).

PARCEL LIES IN FLOOD ZONE A-10, BASE FLOOD ELEVATION OF +9.0'. THIS INFORMATION
TAKEN FROM FLOOD INSURANCE RATE MAP 125124 0325 C, EFFECTIVE DATE 11/4/92
(INDEX DATED 12-20-00).

THE F.E.M.A. FLOOD ZONE INFORMATION INDICATED HEREON IS BASED ON MAPS SUPPLIED
BY THE FEDERAL GOVERNMENT. THIS FLOOD INFORMATION MUST BE VERIFIED WITH ALL
PERMITTING REGULATORY ENTITIES PRIOR TO COMMENCING ANY WORK OR APPLICATION
DEPENDENT ON SAID FLOOD INFORMATION.

IRON RODS "SET" ARE 5/8" X 18" REBAR WITH YELLOW CAP BEARING CORPORATION
NO. LB4919.

UNDERGROUND IMPROVEMENTS, UTILITIES AND/OR FOUNDATIONS WERE NOT LOCATED
UNLESS OTHERWISE NOTED.

THIS PLAT PREPARED AS A BOUNDARY SURVEY AND IS NOT INTENDED TO DELINEATE
THE JURISDICTION OR JURISDICTIONAL AREAS OF ANY FEDERAL, STATE, REGIONAL OR
LOCAL AGENCY, BOARD, COMMISSION OR OTHER ENTITY.

DATE OF LAST FIELD WORK: 08-28-03

SURVEY MEETS OR EXCEEDS THE ACCURACY STANDARDS OF AN URBAN SURVEY
(1:15,000).

CERTIFIED TO:
DANIEL WAYNE HOMES, INC.
FRANK A. ANTONOVITZ
CAROLYN ANTONOVITZ

*NOT VALID WITHOUT THE SIGNATURE AND
THE ORIGINAL RAISED SEAL OF A FLORIDA
LICENSED SURVEYOR AND MAPPER.

BEAN, WHITAKER, LUTZ & KAREH, INC.

JOSEPH L. LUTZ, P.S.M., NO. LS3375
PROFESSIONAL SURVEYOR & MAPPER
STATE OF FLORIDA

- THIS CERTIFICATION IS ONLY FOR THE LANDS
DESCRIBED HEREON.
- IT IS NOT A CERTIFICATION OF TITLE, ZONING,
SETBACKS, OR FREEDOM OF ENCUMBRANCES.
- THIS SURVEY WAS PREPARED WITHOUT BENEFIT OF
ABSTRACT OF TITLE AND ALL MATTERS OF TITLE
SHOULD BE REFERRED TO AN ATTORNEY AT LAW.

CURVE	RADIUS	DELTA ANGLE	ARC LENGTH	CHORD LENGTH	CHORD BEARING
CURVE1	380.00'	14°22'59"	95.39'	95.14'	S87°59'36"E
CURVE2	230.00'	19°30'48"	78.33'	77.95'	N88°05'30"W
CURVE3	570.00'	01°45'44"	17.53'	17.53'	N79°12'58"W
CURVE4	400.00'	25°33'43"	178.46'	176.98'	N88°53'03"E
CURVE5	380.00'	02°28'01"	16.36'	16.36'	S79°34'06"E
CURVE6	380.00'	08°42'44"	57.78'	57.73'	N80°27'33"E
CURVE7	230.00'	06°02'55"	24.28'	24.27'	S79°07'39"W

LEGEND

(P) = PLAT	V.G. = CONCRETE VALLEY GUTTER
(M) = MEASURED	E.O.W. = EDGE OF WATER
(F) = FIELD MEASURED & VERIFIED	IDD = IONA DRAINAGE DISTRICT
(D) = DEED	ELEV. = ELEVATION
(R) = RADIAL	TYP. = TYPICAL
(NR) = NON RADIAL	R.P. = RADIUS POINT
(C) = CALCULATED	INV. = INVERT
P.T. = POINT OF TANGENCY	⊗ = WATER METER
PC = POINT OF CURVE	⊙ = FIRE HYDRANT
I.R. = IRON ROD	⊕ = UNITED TELEPHONE SERVICE BOX
FND. = FOUND	⊞ = CABLE TELEVISION BOX
T.O.B. = TOP OF BANK	⊟ = SEWER SERVICE
L&BE = LANDSCAPE & BUFFER EASEMENT	⊠ = CATCH BASIN
U.E. = UTILITY EASEMENT	⊡ = TRANSFORMER
L.M.E. = LAKE MAINTENANCE EASEMENT	⊞ = ELECTRIC SERVICE
P.U.E. = PUBLIC UTILITY EASEMENT	⊟ = SEWER MANHOLE
E.O.P. = EDGE OF PAVEMENT	⊞ = WOOD POWER POLE
R/W = RIGHT-OF-WAY	⊞ = GATE VALVE
CONC. = CONCRETE	⊞ = OVER HEAD LINES
O/H = OVERHEAD POWER LINES	⊞ = LIGHT POLE
N/D = NAIL & DISK	⊞ = FND. PK N/D "PCP LB#6690"
P.R.M. = PERMANENT REFERENCE MONUMENT	⊞ = FND. 5/8" I.R. LB#6690
P.C.P. = PERMANENT CONTROL POINT	⊞ = FND. 5/8" I.R. LB4919
I.E. = INVERT ELEVATION	
P.I. = POINT OF INTERSECTION	
D.E. & P.U.E. = DRAINAGE AND PUBLIC UTILITY EASEMENT	

LOT 79 - CALOOSA CREEK 15656 CALOOSA CREEK CIRCLE

Bean, Whitaker, Lutz & Kareh, Inc.

CONSULTING ENGINEERS AND SURVEYORS LB 4919

13041-1 MCGREGOR BOULEVARD, FORT MYERS, FLORIDA 33919-5910 (941) 481-1331

SR34424.DWG

DATE	PROJECT NO.	DRAWN BY	SCALE	SHEET	S-T-R	PLAT BOOK	PAGE
08-28-03	34424	J.L.L.	1"=30'	1 OF 1	35-45-23	72	8

LOT 79 - CALOOSA CREEK - P.B. 72, PG. 8



COMMUNITY DEVELOPMENT

TRADE PERMIT APPLICATION

Ref# _____
Date 1/21/04
Tech JG

PROP. OWNER: Antonovitz PERMIT #: Res 2003-08595
STRAP #: _____ CONT. BUS. NAME: Danny Via Plumbing
TENANTS' BUS. NAME: _____ LICENSE #: LP 17346
JOB ADDRESS: 15656 Calossa Crk Cir. MAILING ADDRESS: 2307 Bruner Ln #9
ESTIMATED JOB VALUE \$1000.00 Fort Myers, FL 33912
SUBDIVISION / MH / RV PARK: _____ PHONE #: 239-481-5500 FAX #: 239-481-5300
LOT NUMBER: _____ CONTACT PERSON: Scott W. Smith
JOB DESCRIPTION: LP Gas Piping to 1 outlet for cooktop, 120V tank
DIRECTION TO JOB: _____

*****CHECK INFORMATION THAT APPLIES*****

RE-ROOF

FS _____ Tear off _____ Shingle over shingle _____ Roof pitch* _____
*If shingle roof is less than a 2/12 pitch, a roof pitch agreement is required before inspections.

MD _____ BU _____ CT _____ MT _____ SP _____ CS _____ RR _____ UT _____ Tile may
be changed to shingle, but shingle may not be changed to tile without Engineering approval.

AIR CONDITIONING

Change out _____ New system in existing residence Yes * / No. If Yes, ground floor square footage is
required _____ sq. ft. *Separate electric permit is required *

If a Mobile Home or RV, the BP# is required for new systems. Building Permit #: _____

SEER _____ KW _____ Tons _____ Pkg Unit _____ Split System _____ Duct Work Only _____

Condenser only _____ Air handler only _____ Pool Heat Pump _____

LP GAS ☒ Number of Outlets 1 NATURAL GAS _____

SOLAR _____ Roof Truss Affidavit _____ (on back of application) Pool Heater _____ Water Heater _____

ELECTRIC _____ AMPS _____ Upgrade _____ Relocate _____ Set ped. _____ (2,3,4, gang service) _____
Irrigation? _____ From Lake _____ Well _____ (well permit # required)

PLUMBING _____ Grnd floor area _____ sq. ft. SEWER _____ A copy of paid tap receipt is required.

FIRE ALARM _____ # of devices _____ MONITORING SYSTEM _____

OWNER BUILDER DISCLOSURE STATEMENT

State law requires construction to be done by licensed contractors. You have applied for a permit under an exemption to that law. The exemption allows you, as the owner of your property, to act as your own contractor even though you do not have a license. You must supervise the construction yourself. You may build or improve a one-family or two-family residence or a farm outbuilding. You may also build or improve a commercial building at a cost of \$25,000 or less. The building must be for your own use and occupancy. It may not be built for sale or lease. If you sell or lease a building you have built yourself within 1 one year after the construction is complete, the law will presume that you built it for sale or lease, which is a violation of this exemption. You may not hire an un-licensed person as your contractor. It is your responsibility to make sure that people employed by you have licenses required by state law and by county or municipal licensing ordinances. Any person working on your building who is not licensed must work under your supervision and must be employed by you, which means that you must deduct F.I.C.A. and with-holding tax and provide workers' compensation for that employee, all as prescribed by law. Your construction must comply with all applicable laws, ordinances, building codes, and zoning regulations.

Under penalties of perjury, I declare that I have read the foregoing Owner Builder Disclosure Statement and that the facts stated in it are true.

Signature (owner/authorized agent) _____

Printed Name _____

SOLAR ROOF TRUSS AFFIDAVIT

To: Lee County Community Development

This is to certify that the roof trusses at

are pre-manufactured and all panels will be attached as prescribed in the Florida Information Energy booklet and will not exceed two (2) pounds per square foot and will be installed around and/or into the roof truss members.

Under the penalties of perjury, I declare that I have read the foregoing Roof Truss Affidavit and that the facts stated in it are true.

Signature (owner/authorized agent) _____

Printed Name _____

Danny Via Plumbing, Inc.
Gas Piping Division South
2307 Bruner Lane ~ #9
Fort Myers, Florida, 33912
239/481-5500 ~ Fax 239/481-5300
LPG 017346 ~ CFC 044163

OWNER: Antonovity

NAME: Frank

ADDRESS: 15656 Calvoza

Creech Circle

PHONE: _____

STRAP: _____

BLOCK: _____ LOT: _____

PERMIT #: Red 2003-08595

Installation to be in accordance with
NFPA 54 ~ 58, Local & State Code.

OUTLETS: 1 BTU'S: 40000

REGULATORS: 1ST A3214

2ND B622

TANK SIZE: 120

SECURED BY: Cable + Onebe


FOUNDATION: Hole Bottom




PIPING: 1ST 3/4" Plastic

2ND 1/2, 3/4, Galv + CSST

CONTACT: Scott W. Smith

PHONE: # above or 6332485

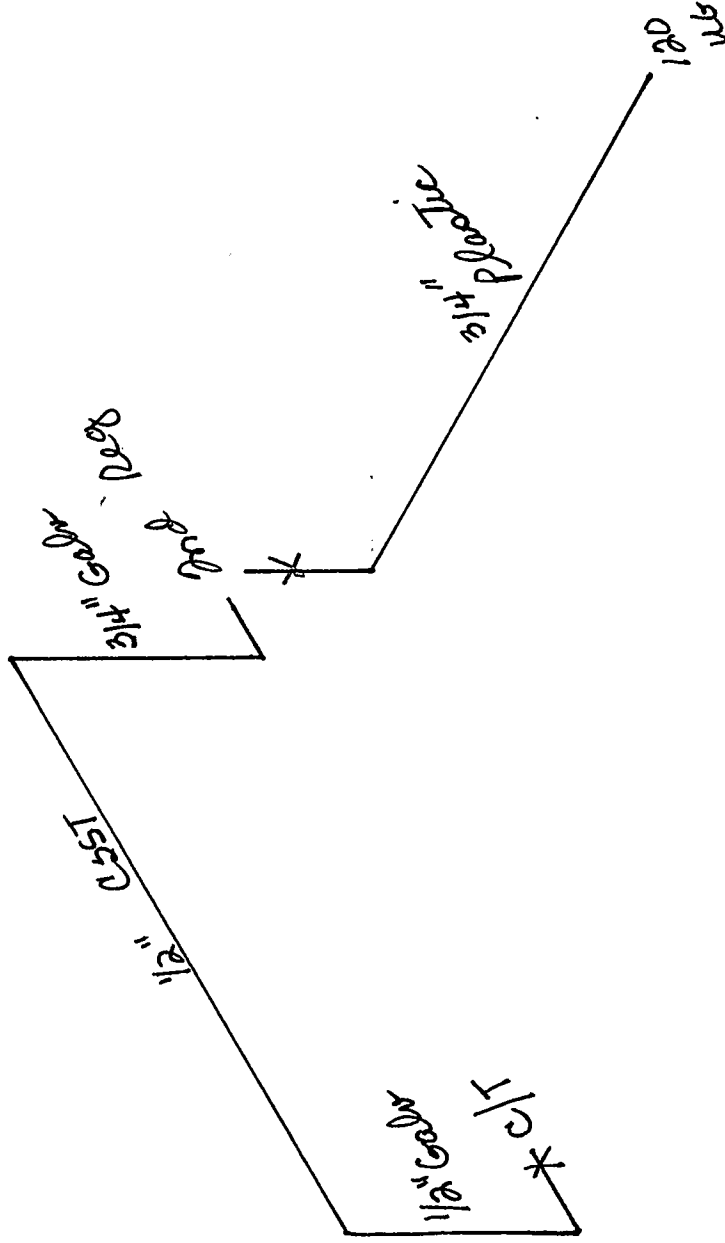


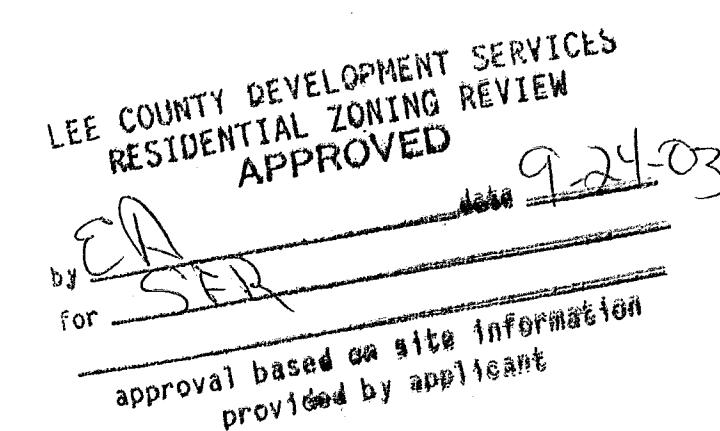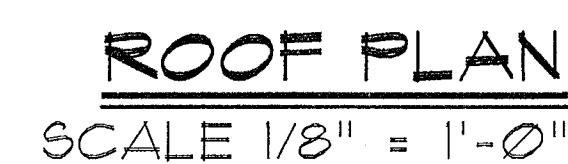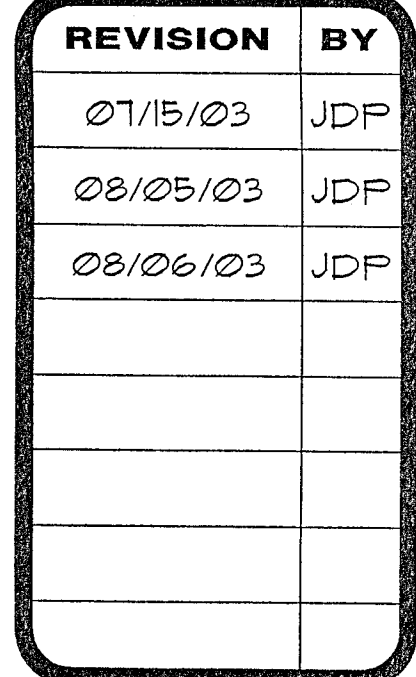

SITE PLAN
SCALE 1" = 20'

THE CHINO II MODEL
A RESIDENCE FOR MR. & MRS. FRANK ANTONOVITZ
18556 CALOOSA CREEK CIRCLE
FORT MYERS, FLORIDA 33908
LOT #13 CALOOSA CREEK

Daniel Wayne Homes, Inc.
239/466-3955
Fax: 239/466-9486
E-mail: danyehomes@earthlink.net
CGC034850
12860 Banyan Creek Drive
Fort Myers, Florida 33908

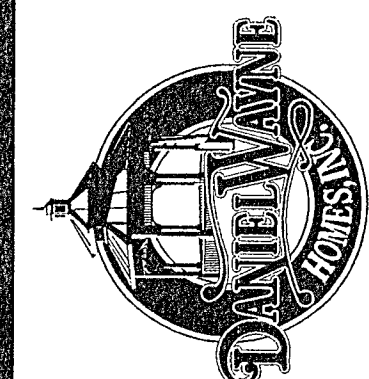

DRAWN
JDP
CHECKED

DATE

SCALE

JOB NO.


SHEET

A-1


OF **7** SHEETS

HARVEY STRAUSS, P.E.
FLORIDA REG. # 18799

PLAN NOTE / DISCLAIMER
 PRINTS ARE A GRAPHICAL REPRESENTATION OF
 THE HOME. PLEASE REFER TO THE CONSTRUCTION
 SPECIFICATIONS FOR SPECIFIC BUILDING MATERIALS
 TO BE USED.

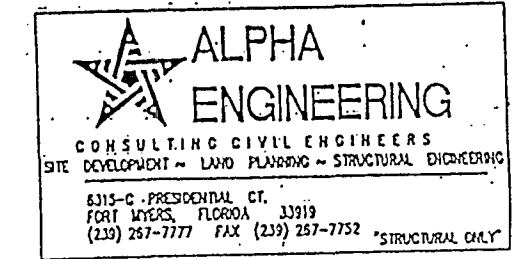


REVISION	BY
07/15/03	JDP
08/05/03	JDP
08/06/03	JDP

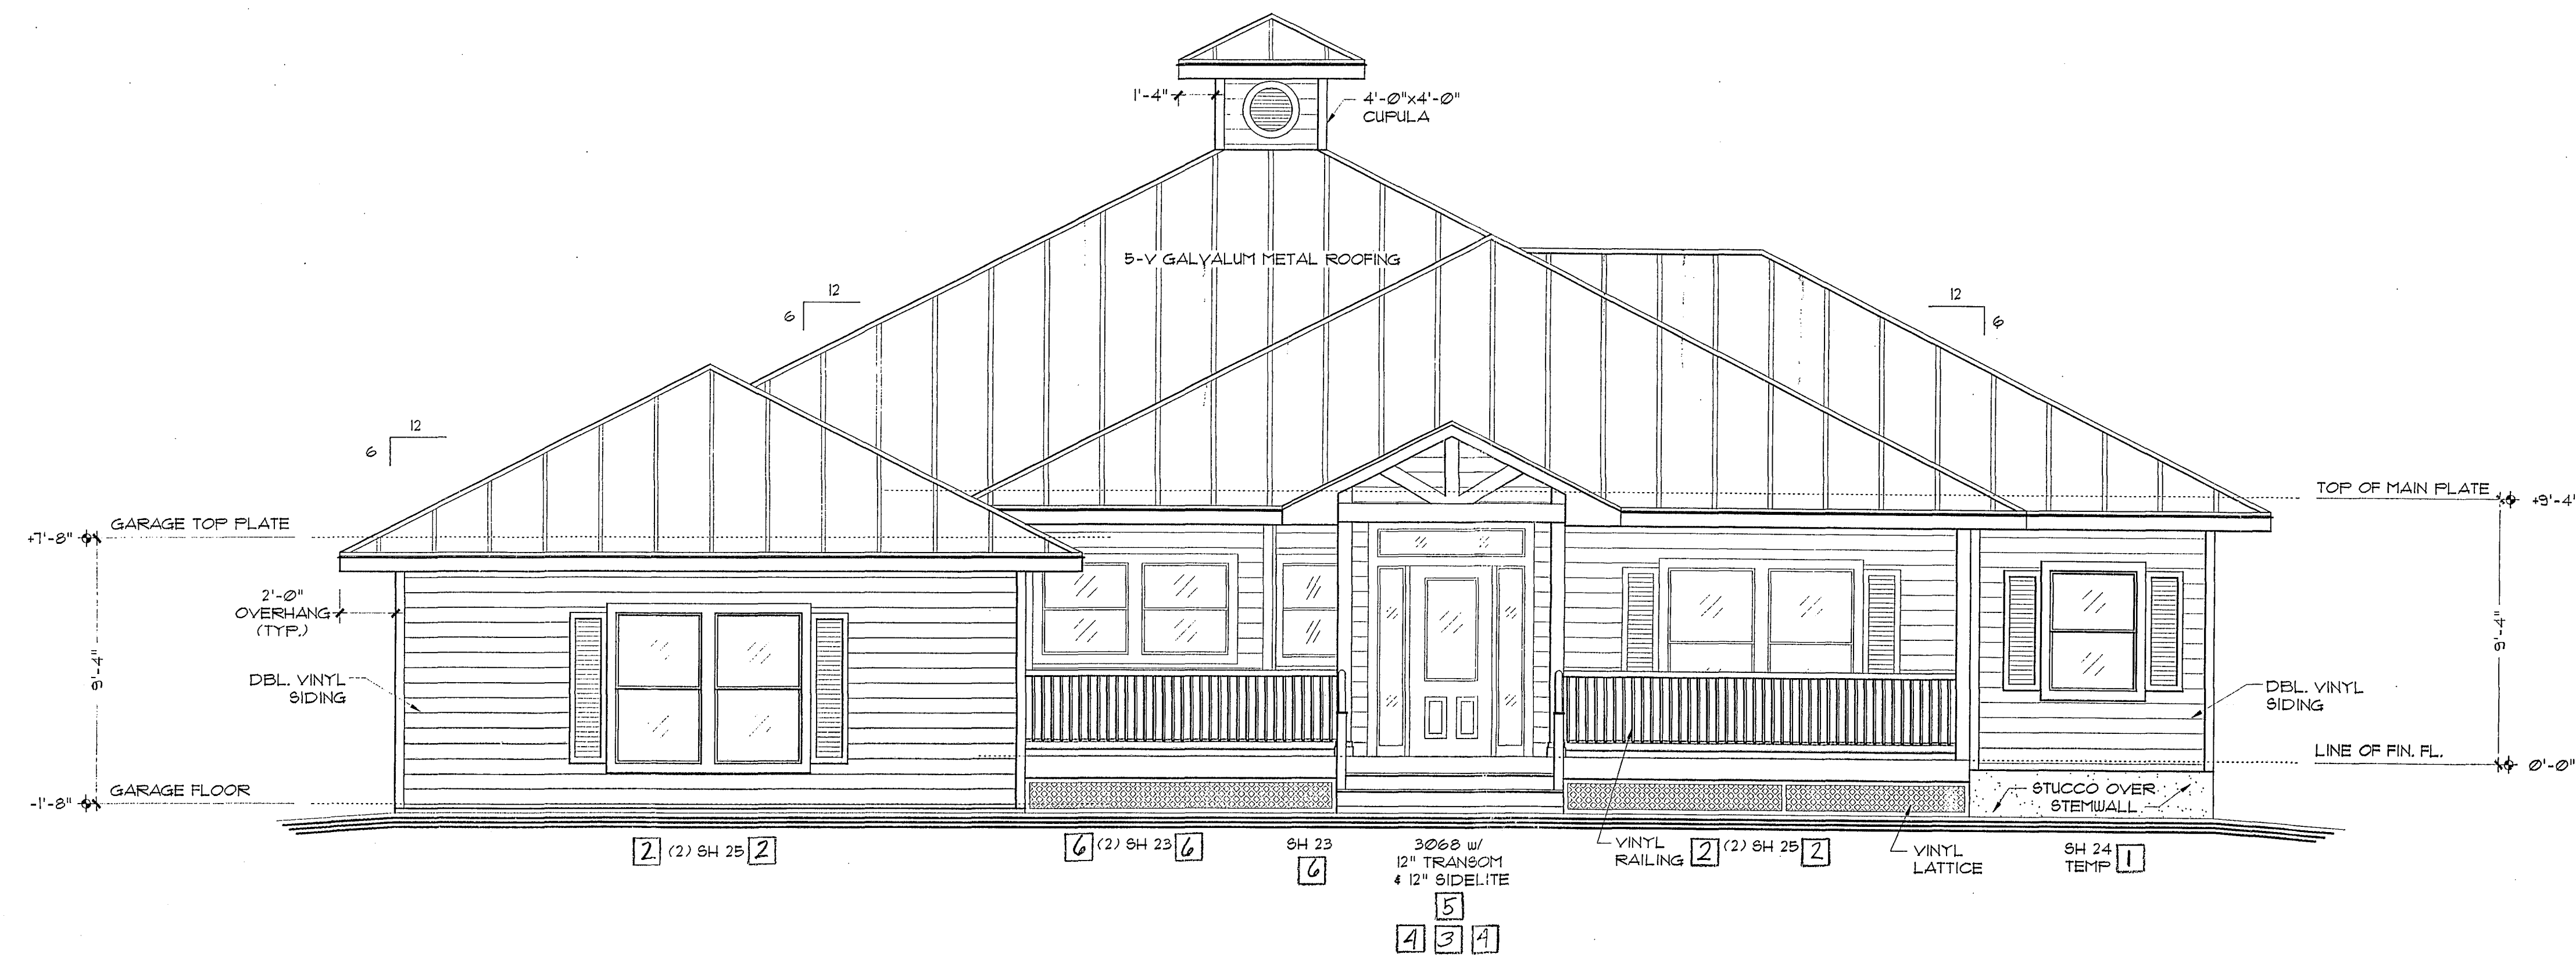

FRONT ELEVATION
 SCALE 1/4" = 1'-0"

THIS BLDG / STRUCTURE HAS BEEN DESIGNED IN ACCORDANCE W/ 2001 EDITION OF THE F.L.A. BUILDING CODE FOR AN ENCLOSED STRUCTURE	
WIND SPEED	130 MPH
WIND IMPORTANCE FACTOR	1.0
BLDG CATEGORY	II
WIND EXPOSURE	B
INTERNAL PRESS. COEFF.	+/- 0.18
IMPACT PROTECTION	STORM PANELS


INDICATES WINDOW APPLIED PRESSURES
 SEE ENG'R SHEETS S1 & S2 FOR ADD'L INFO

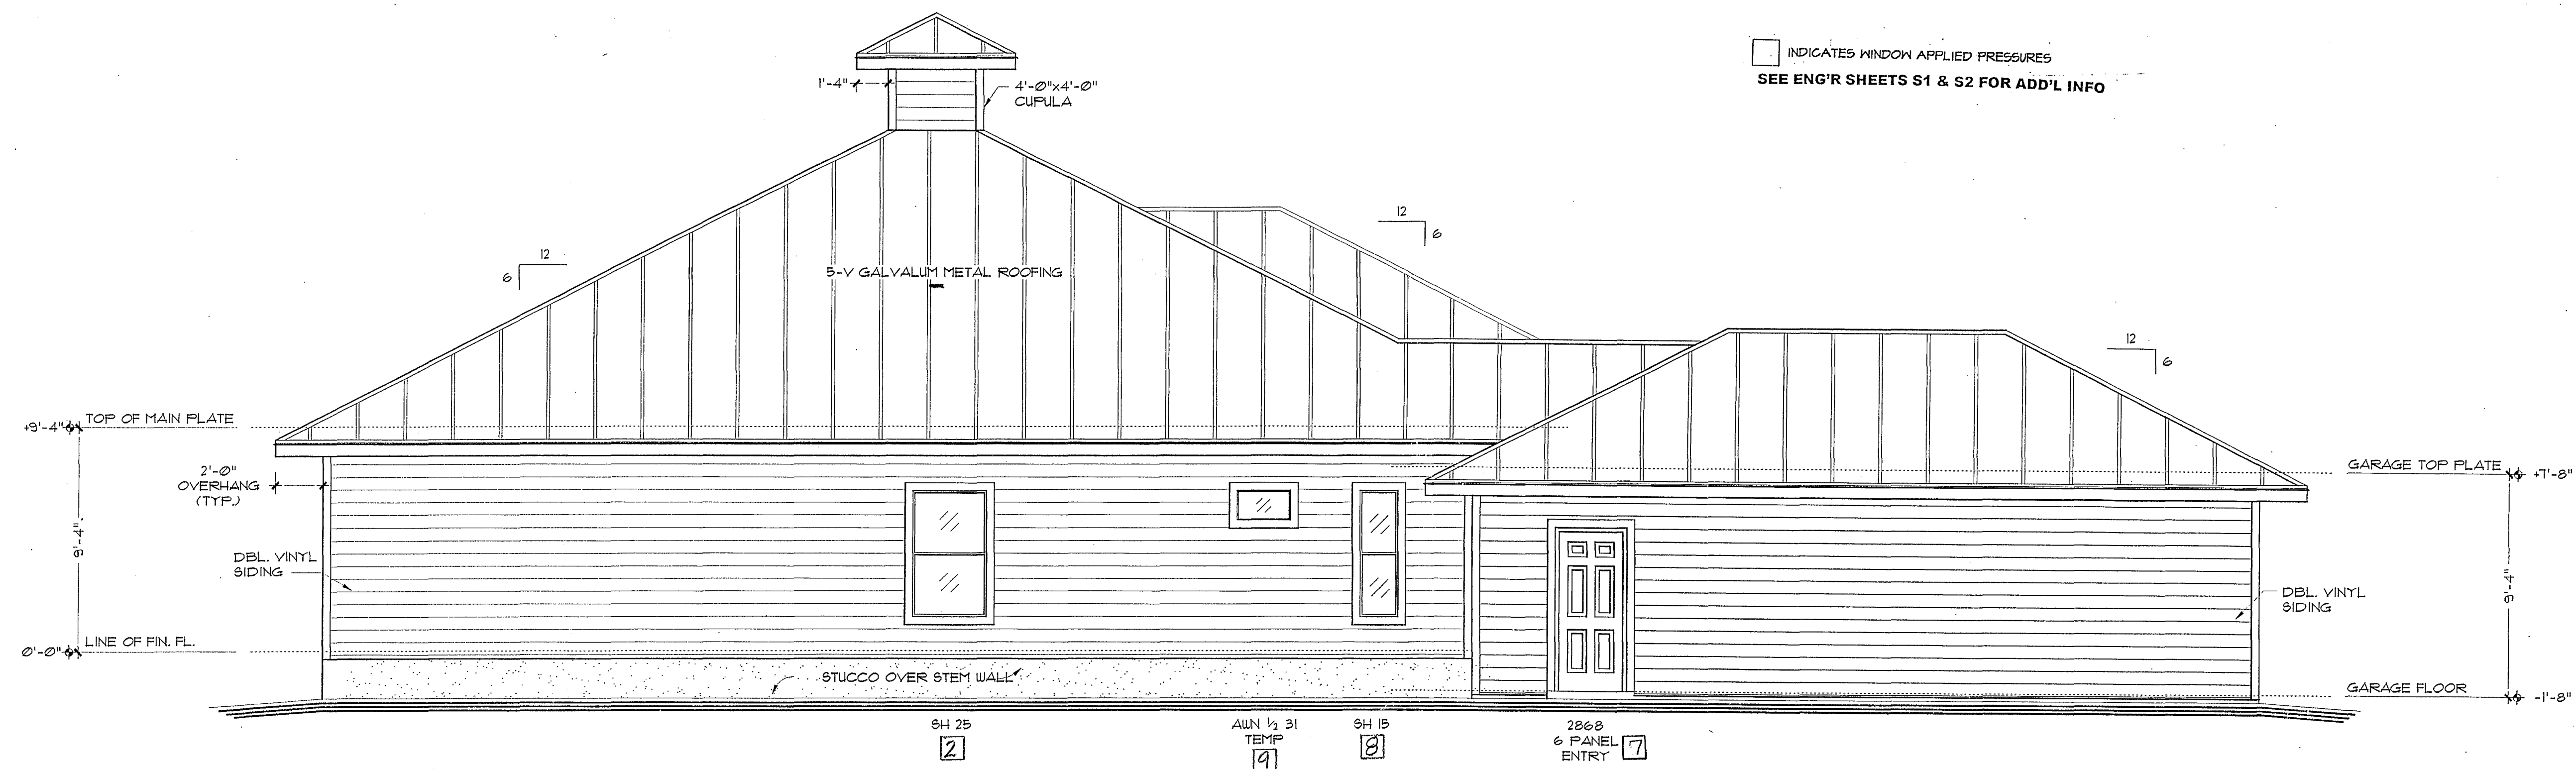

LEFT ELEVATION
 SCALE 1/4" = 1'-0"

THE CHINO II MODEL
 A RESIDENCE FOR MR. & MRS. FRANK ANTONOVITZ
 #656 CALOOSA CREEK CIRCLE
 FORT MYERS, FLORIDA 33906
 LOT #3, CALOOSA CREEK

Daniel Wayne Homes, Inc.
 239/466-3955
 Fax: 239/466-9486
 Email: danwhomes@earthlink.net
 CGC034850
 12860 Banyan Creek Drive
 Fort Myers, Florida 33908

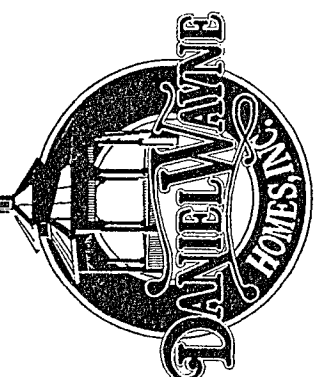



DRAWN JDP
CHECKED
DATE
SCALE
JOB NO.
SHEET
A-2
OF 7 SHEETS

HARVEY STRAUSS, P.E.
 FLORIDA REG. # 18789

Mr.
4/12/03


COPYRIGHT © 2002 DANIEL WAYNE HOMES, INC. THIS DOCUMENT, AND THE IDEAS AND DESIGN CONCEPTS INCORPORATED HEREIN, AS AN INSTRUMENT OF SERVICE, CAN NOT BE USED, IN WHOLE OR IN PART, FOR THIS OR ANY OTHER PROJECT, WITHOUT THE WRITTEN AUTHORIZATION OF DANIEL WAYNE HOMES, INC.

PLAN NOTE / DISCLAIMER
 PRINTS ARE A GRAPHICAL REPRESENTATION OF
 THE HOME. PLEASE REFER TO THE CONSTRUCTION
 SPECIFICATIONS FOR SPECIFIC BUILDING MATERIALS
 TO BE USED.

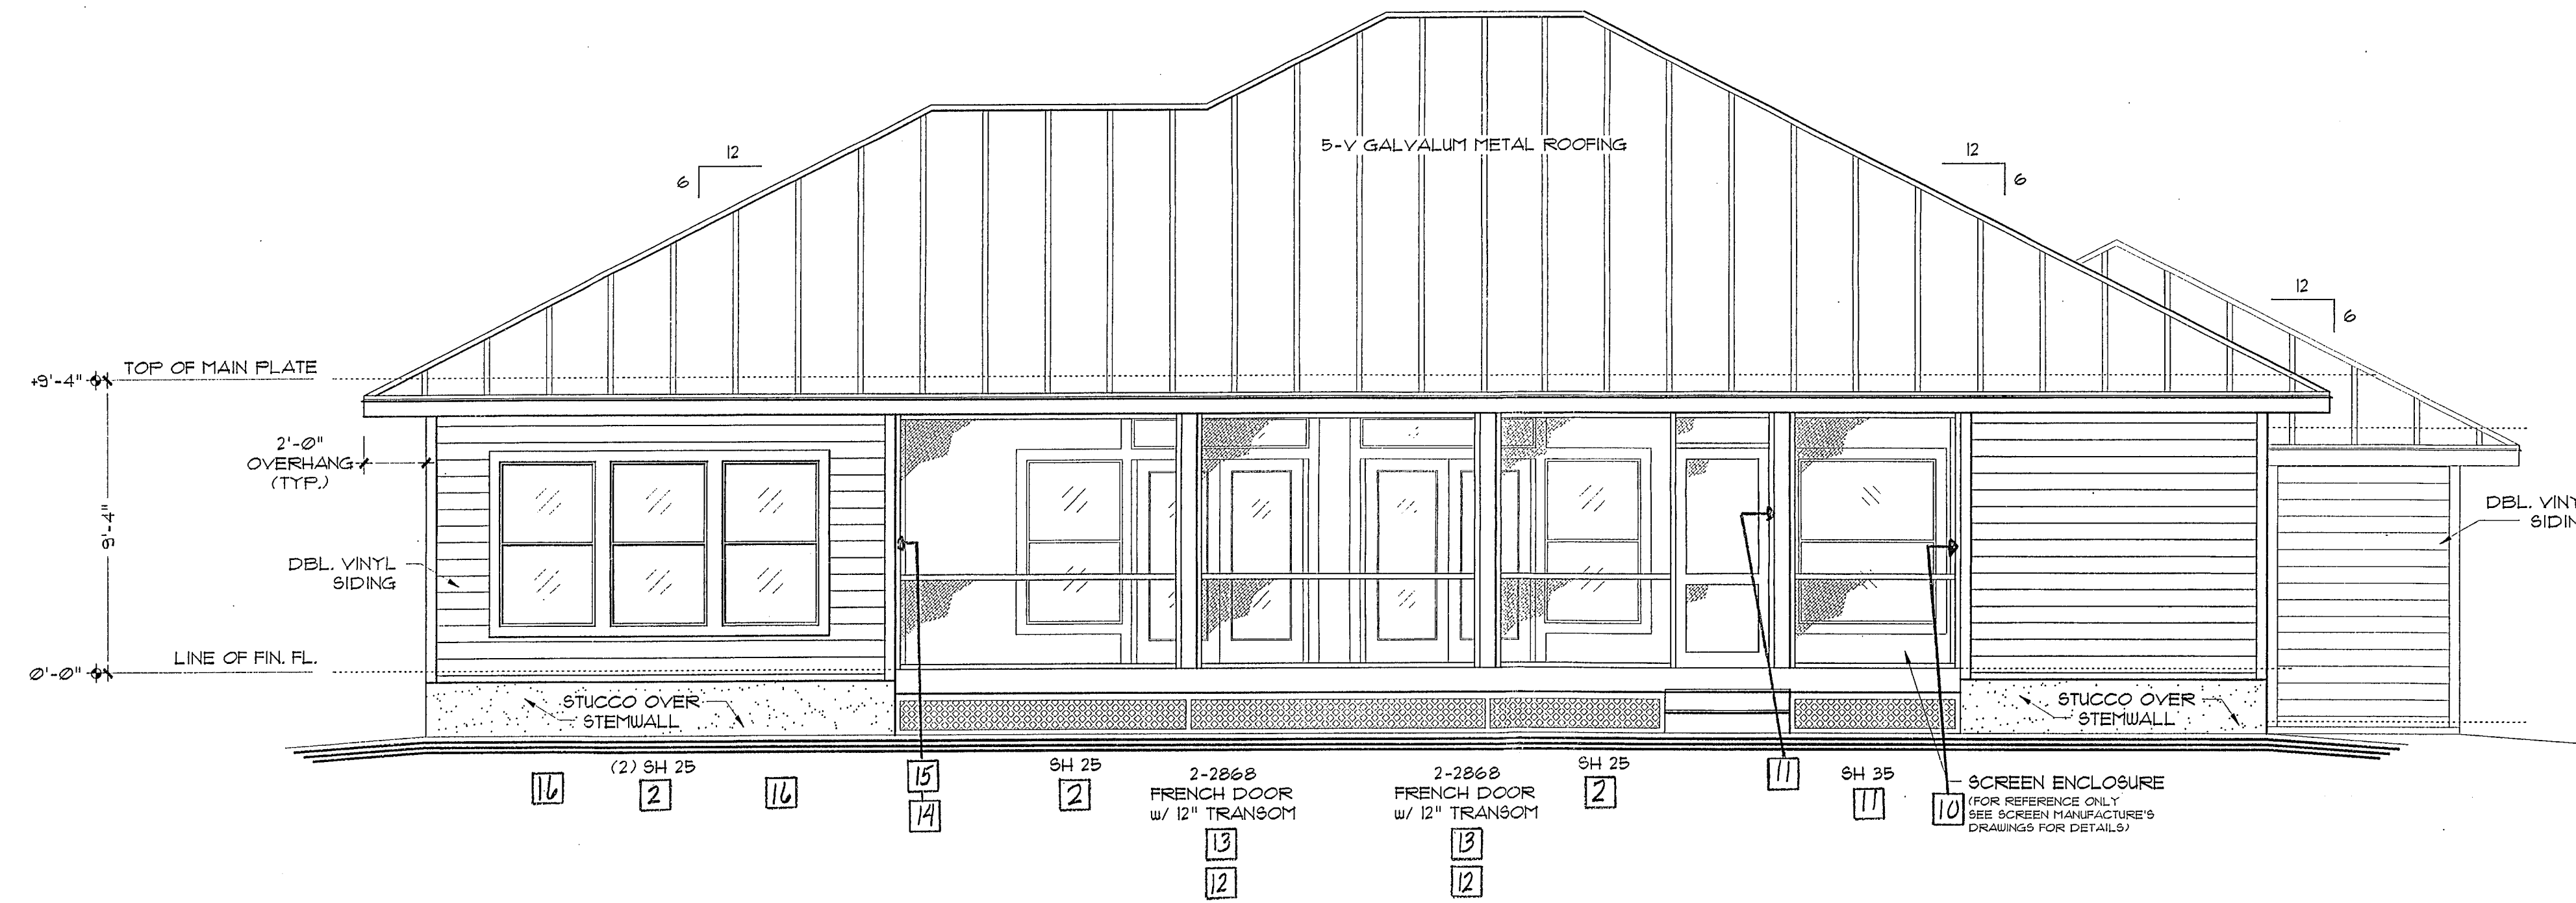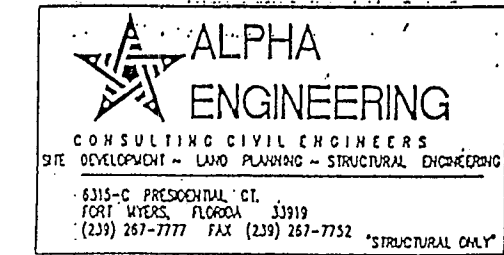

REAR ELEVATION
 SCALE 1/4" = 1'-0"

THIS BLDG / STRUCTURE HAS BEEN DESIGNED IN ACCORDANCE w/ 2001 EDITION OF THE FLA. BUILDING CODE FOR AN ENCLOSED STRUCTURE.	
BASIC WIND SPEED	130 MPH
WIND IMPORTANCE FACTOR	1.0
BLDG CATEGORY	II
WIND EXPOSURE	B
INTERNAL PRESS. COEFF.	+/- 0.18
IMPACT PROTECTION	STORM PANELS

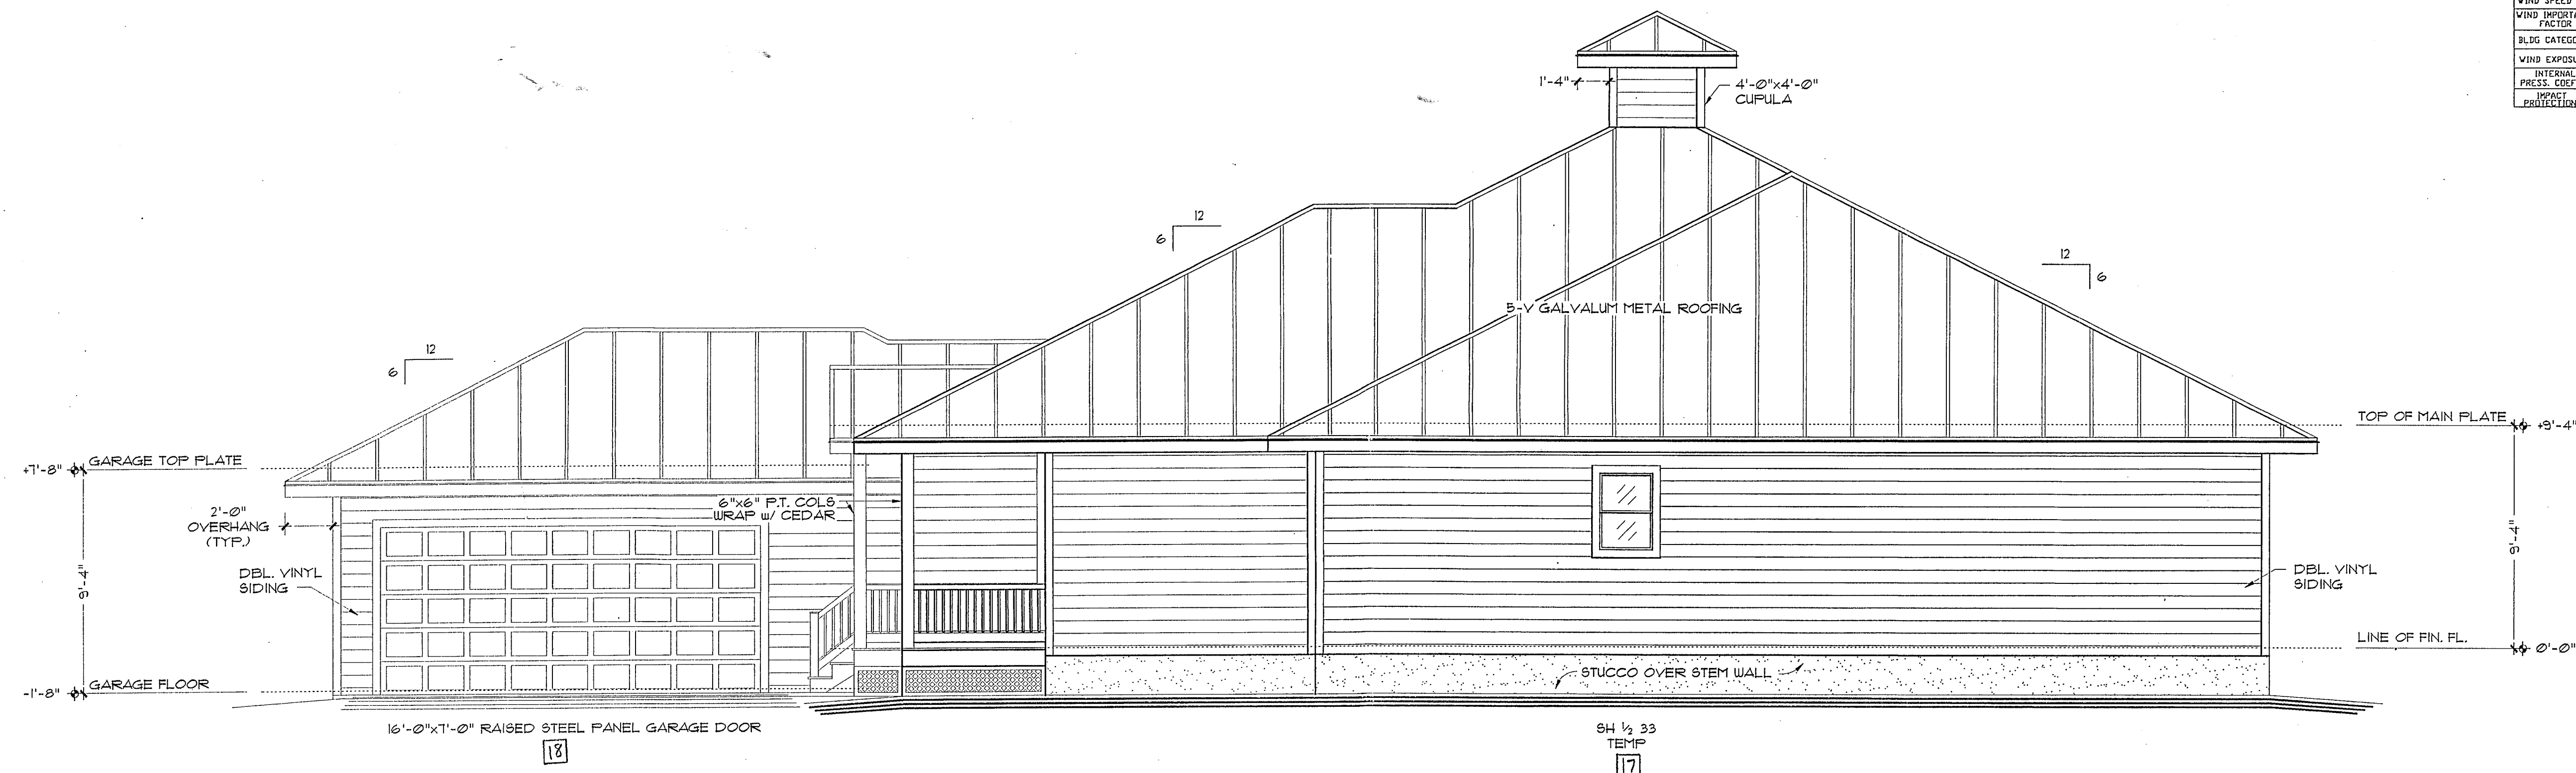


RIGHT ELEVATION
 SCALE 1/4" = 1'-0"

HARVEY STRAUSS, P.E.
 FLORIDA REG. # 18788


REVISION	BY
07/15/03	JDP
08/05/03	JDP
08/06/03	JDP

THE CHINO II MODEL
 A RESIDENCE FOR MR. & MRS. FRANK ANTONOVITZ
 15656 CALOOSA CREEK CIRCLE
 FORT MYERS, FLORIDA 33908
 LOT 15, CALOOSA CREEK

Daniel Wayne Homes, Inc.
 239/466-3955
 Fax: 239/466-9486
 Email: danwhomes@aol.com
 CGC034850
 12860 Bayan Creek Drive
 Fort Myers, Florida 33908

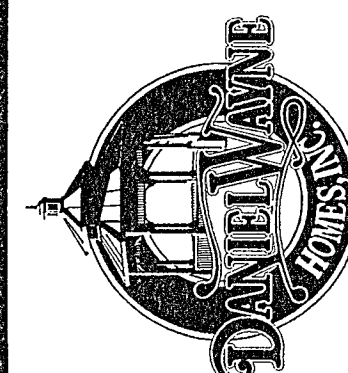


DRAWN JDP
CHECKED
DATE
SCALE
JOB NO.
SHEET
A-3
OF 7 SHEETS

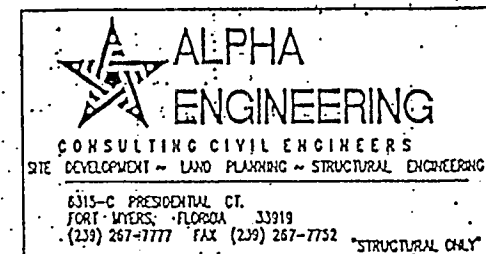

REVISION	BY
07/15/03	JDP
08/05/03	JDP
08/06/03	JDP

THE CHINO II MODEL
A RESIDENCE FOR MR. & MRS. FRANK ANTONOVITZ
#5656 CALOOSA CREEK CIRCLE
FORT MYERS, FLORIDA 33909
LOT #3, CALOOSA CREEK

Daniel Wayne Homes, Inc.
239/466-3955
Fax: 239/466-9486
E-mail: dwhomes@earthlink.net
CC004850
12860 Banyan Creek Drive
Fort Myers, Florida 33908

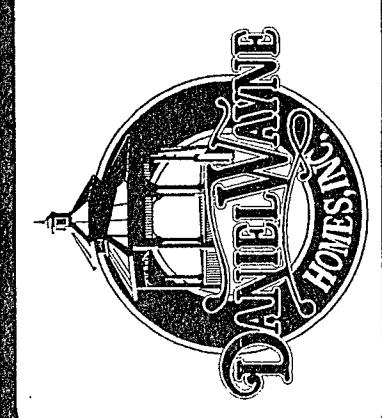

DRAWN JDP
CHECKED
DATE
SCALE
JOB NO.
SHEET
A-4
OF 7 SHEETS

THIS BLDG / STRUCTURE HAS BEEN DESIGNED IN ACCORDANCE W/ 2001 EDITION OF THE FLA. BUILDING CODE FOR AN ENCLOSED STRUCTURE.	
BASIC WIND SPEED	130 MPH
WIND IMPORTANCE FACTOR	1.0
BLDG CATEGORY	II
WIND EXPOSURE	B
INTERNAL PRESS. COEFF.	+/- 0.18
WIND PROTECTION	STORM PANELS



SEE ENG'R SHEETS S1 & S2 FOR ADD'L INFO

- FOOTINGS:
- 2' x 2' x 12" W/ (4) #3 EACH WAY
 - 2'-6" x 2'-6" x 12" W/ (4) #3 EACH WAY
 - 3' x 3' x 12" W/ (4) #3 EACH WAY
 - 3'-6" x 3'-6" x 12" W/ (4) #4 EACH WAY
 - 4' x 4' x 12" W/ (6) #4 EACH WAY
 - 4'-6" x 4'-6" x 12" W/ (6) #5 EACH WAY
 - 5' x 5' x 12" W/ (5) #6 EACH WAY

TYPICAL NOTE
4" THICK - 3000 PSI CONCRETE SLAB WITH 6 x 6 x 10/10 WWM. REINFORCING OR FIBER MESH ON 6 MIL POLY VAPOR BARRIER ON WELL COMPACTED SOIL, POISONED, NON-ORGANIC FILL

FOUNDATION PLAN
SCALE 1/4" = 1'-0"

HARVEY STRAUSS, P.E.
FLORIDA REG. # 18799

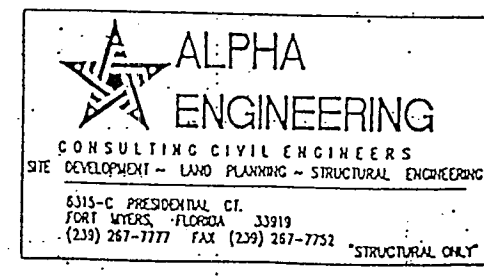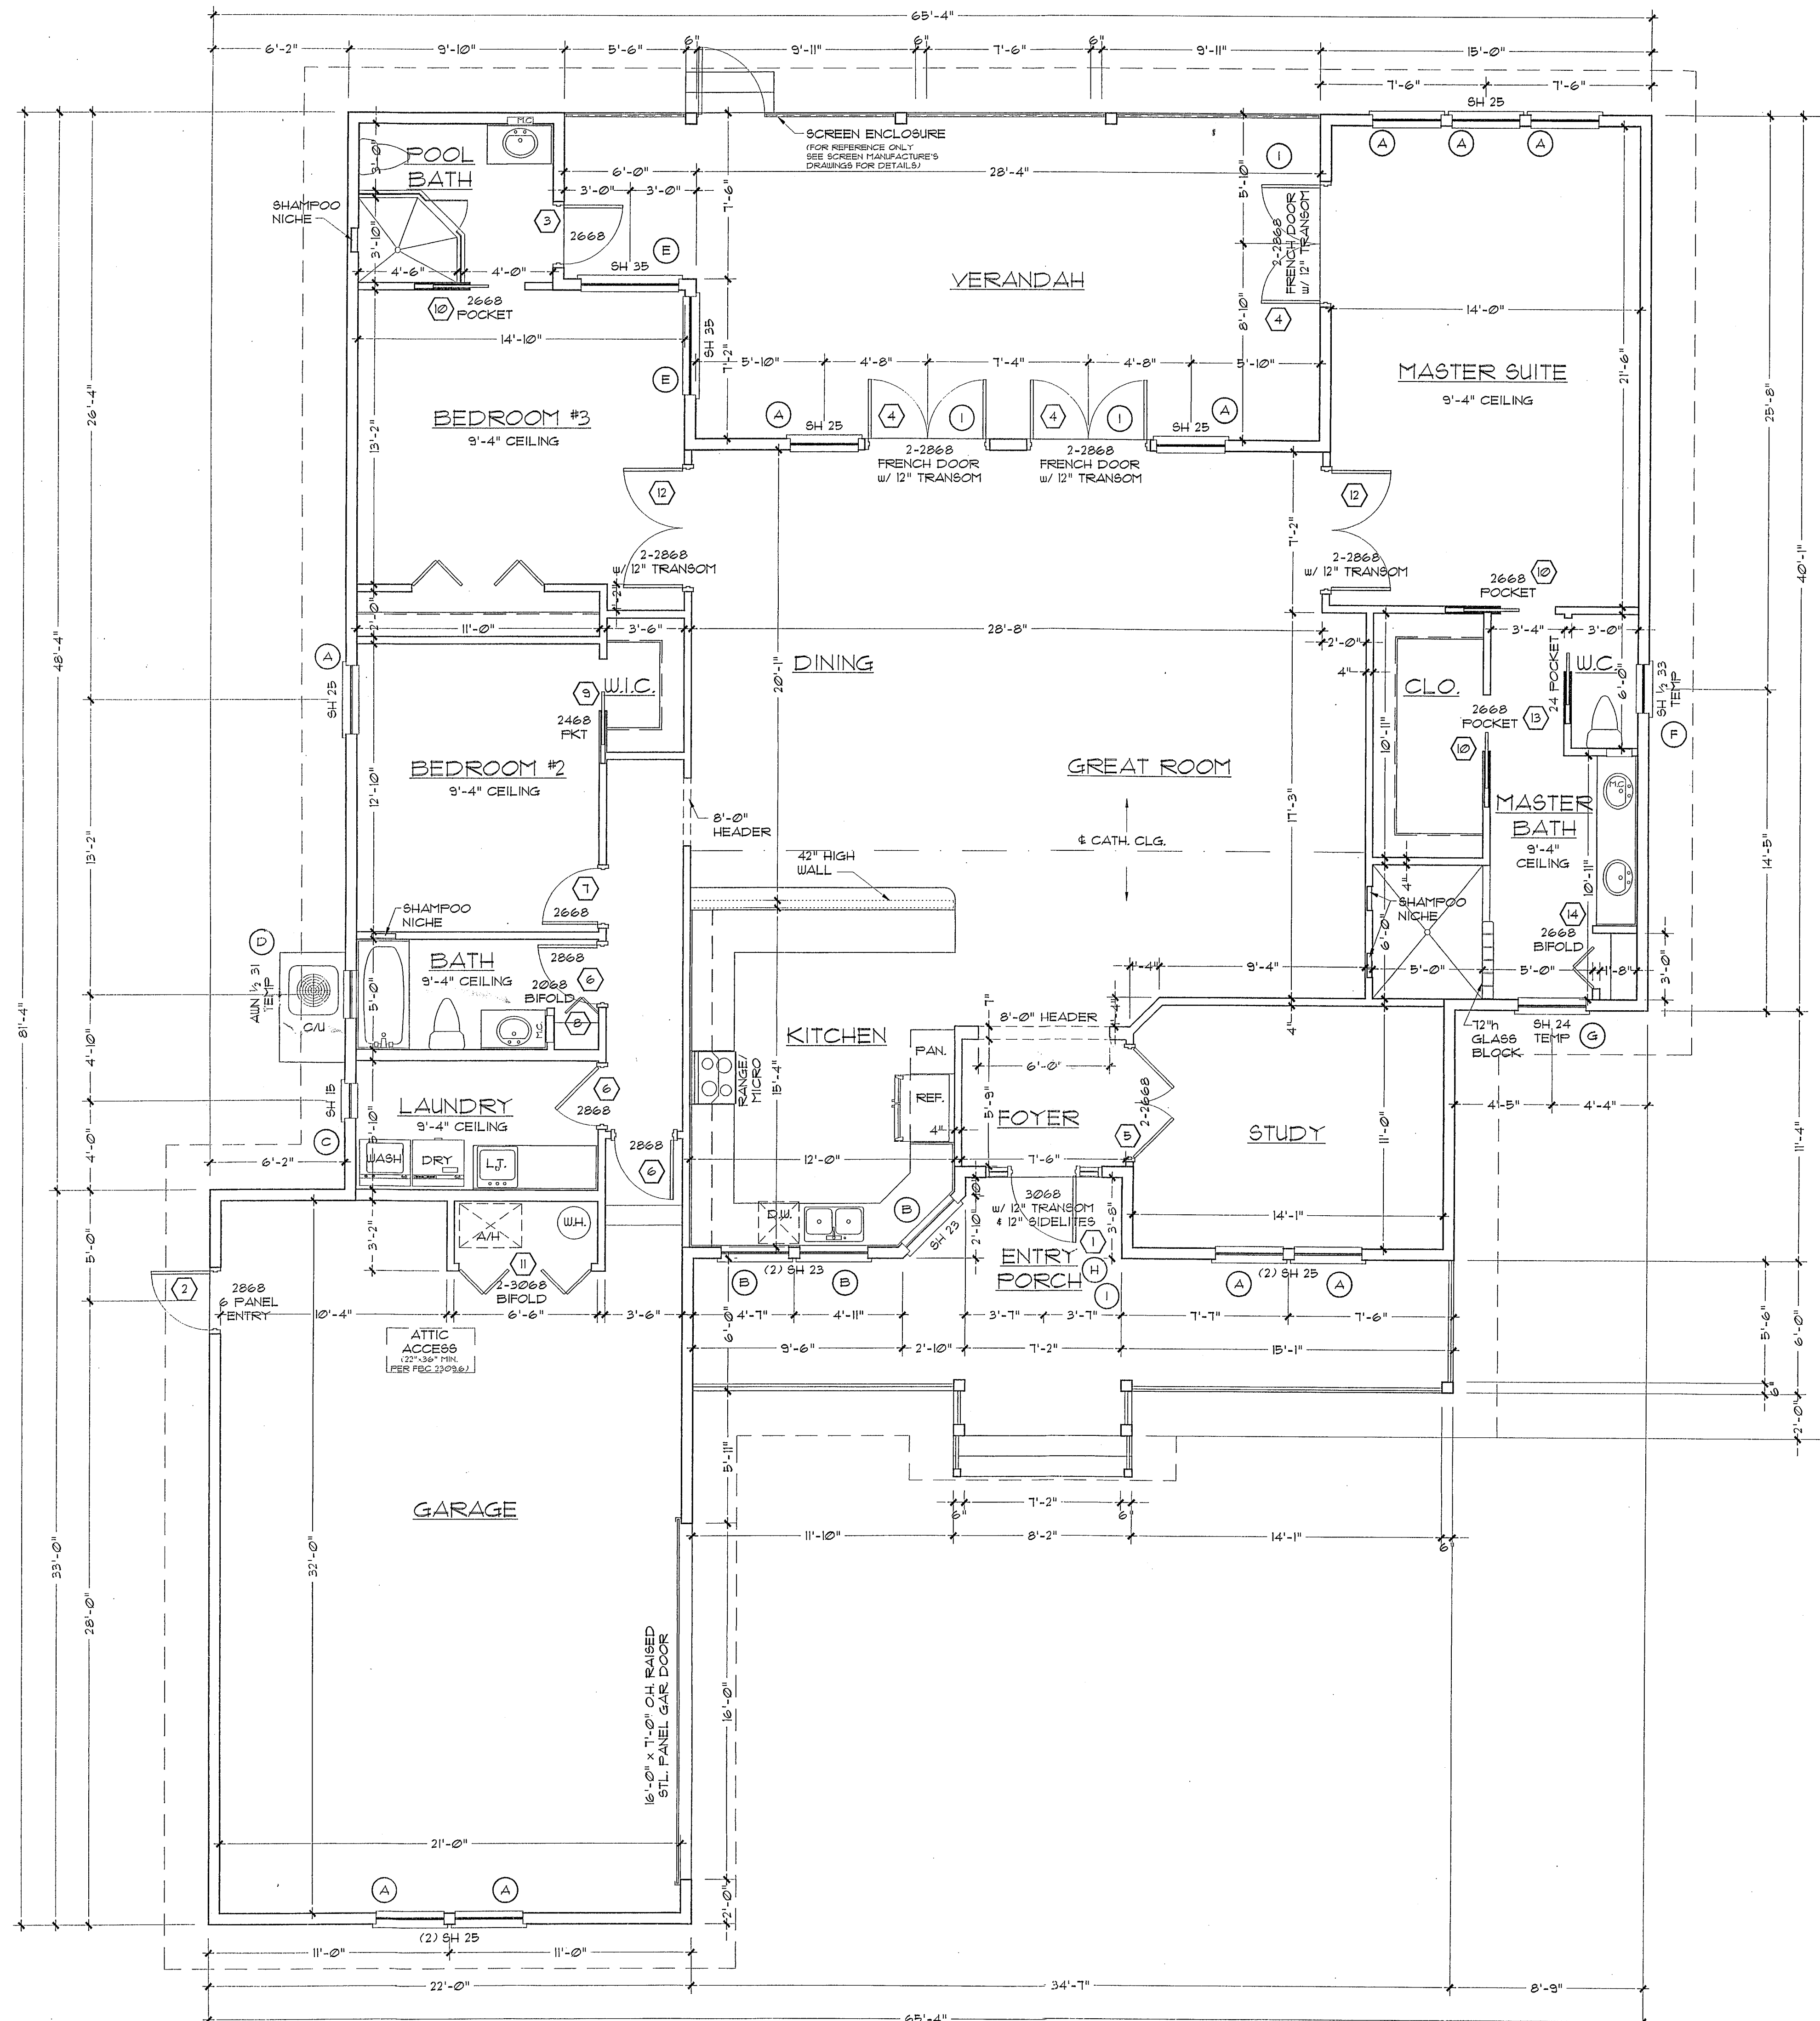

NOTICE
ELEVATION CERTIFICATES
Every building that is required to meet flood elevation must have an Elevation Certificate marked "FINISHED CONSTRUCTION". If an Elevation Certificate is provided at floor completion that is marked "BUILDING UNDER CONSTRUCTION", a second certificate marked "FINISHED CONSTRUCTION" is required to be provided to the Building Department before Final Framing Inspection.
Beginning June 1, 2003 Lee County will no longer perform Final Framing Inspections on buildings in Flood Zones unless a "FINISHED CONSTRUCTION" elevation certificate has been provided to the Building Department.

PROVIDE HYDROSTATIC RELIEF OPENINGS
FLOOD HAZARD ZONE (V) DISTAL ZONE (V) A-2
ONE WINDOW (OR DOOR) IN EACH FLOODABLE ROOM MUST PROVIDE MIN. NET OF CLEAR OPENING AREA 20" WIDE, MIN. 24" HIGH

ENGINEERING CUT SHEETS FROM FRAMES MANUFACTURER MUST BE ON JOB SITE FOR INSPECTOR'S REVIEW

A GUTTER SYSTEM IS REQUIRED FOR ALL BUILDINGS, UNLESS TYPED & OVERLAPPING FAC/01 1503.4.4

THIS BUILDING STRUCTURE HAS BEEN DESIGNED IN ACCORDANCE W/ 2001 EDITION OF THE F.L.B. BUILDING CODE FOR AN ENCLOSED STRUCTURE	
WIND SPEED	130 MPH
WIND IMPORTANCE FACTOR	1.0
BLDG CATEGORY	II
WIND EXPOSURE	B
INTERNAL PRESS. COEFF.	+/- 0.18
IMPACT PROTECTION	STORM PANELS

All window, exterior door, and garage door casings showing installation and wind load compliance must be on job site for inspection - review.
CLEARANCE BETWEEN EARTH & FOM PLASTICS SHALL BE NOT LESS THAN 6" FAC/01 2603.3.2.

FOOTING MUST BE 12" BELOW GRADE (MIN.)
PROVIDE ATTIC ACCESS MIN. 20" x 36" WITH LIGHT FAC/01 2309.6, NEC/09 210-70(a)(3)

*NOTE:
HYDROSTATIC FLOOD VENTS TO EQUAL 1 sq. in. PER 1 sq. ft. OF ENCLOSED SPACE
UNLESS CLEAR OPENING REQUESTED TO BE AT LEAST ONE EARTH-FLOOT ROOM FOR HANDICAP ACCESS
REVIEWED FOR CODE COMPLIANCE DEVELOPMENT SERVICES DATE 9/10/03

FLOOR PLAN

SCALE 1/4" = 1'-0"

AREA CALCULATIONS	
LIVING	2,395 sq. ft.
VERANDAH	468 sq. ft.
ENTRY PORCH	254 sq. ft.
GARAGE	721 sq. ft.
TOTAL AREA	3,844 sq. ft.

HARVEY STRAUSS, P.E.
FLORIDA REG. # 18789

REVISION	BY
07/15/03	JDF
08/05/03	JDF
08/06/03	JDF

ALL AC, PLUMBING & ELECTRIC EQUIP. TO COMPLY WITH FLOOD PLUMBING ELEVATION REQUIREMENT

THE CHINO II MODEL
A RESIDENCE FOR MR. & MRS. FRANK ANTONOVITZ
#5666 CALOOSA CREEK CIRCLE
FORT MYERS, FLORIDA 33908
LOT #19, CALOOSA CREEK

Daniel Wayne Homes, Inc.
239/466-3955
Fax: 239/466-9486
E-mail: danwhome@earthlink.net
CG034880
12860 Baryan Creek Drive
Fort Myers, Florida 33908




DRAWN JDF
CHECKED
DATE
SCALE
JOB NO.
SHEET
A-5
OF 7 SHEETS

ELECTRICAL NOTES:

1. ALL ELECTRIC & PLUMBING / UTILITY CONNECTIONS TO BE ABOVE BFE.
2. RECEPTACLES SHALL BE PLACED SO THAT NO POINT ALONG THE FLOOR LINE OF A WALL, GREATER THAN 2'-0", IS MORE THAN 6'-0" FROM AN OUTLET. NO SPACES FURTHER APART THAN 12'-0" UNLESS OTHERWISE NOTED OR PER SPECIFIC CODE.
3. ALL RECEPTACLES IN BATHROOMS, GARAGES, OUTDOORS, OR WITHIN 6'-0" OF A SINK SHALL BE PROTECTED BY A GROUND FAULT INTERRUPTION SYSTEM (GFI) AND AS NOTED ON THE DRAWINGS.
4. OUTLET BOXES IN THE WALL BETWEEN THE LIVING SPACE AND THE GARAGE SHALL BE METAL OR UL APPROVED FIRE RATED PLASTIC.
5. SMOKE DETECTORS SHALL BE PLACED NO MORE THAN 12" FROM THE CEILING AND 3'-0" FROM THE DUCT OPENING. DETECTORS SHALL BE PERMANENTLY WIRED AND INTERCONNECTED. DETECTORS SHALL PROTECT ALL SLEEPING AREAS AND STAIRWAYS.
6. SWITCH PLATES SHALL BE PLACED AT 42" ABOVE THE FINISHED FLOOR TO THE CENTER OF THE SWITCH, TYPICAL.
7. AT LEAST TWO (2) 20 amp. SMALL APPLIANCE CIRCUITS SHALL BE PROVIDED TO SERVE THE KITCHEN, NOOK, AND DINING AREAS. THESE CIRCUITS SHALL HAVE NO OTHER OUTLETS. DEDICATED CIRCUITS SHALL BE PROVIDED FOR THE REFRIGERATOR, GARBAGE DISPOSAL, DISHWASHER, CLOTHES WASHER, DRYER AND RANGE, AND THE SHALL HAVE NO OTHER OUTLETS. CONFORM TO NEC-220-3(c) OR LOCAL CODE.
8. ALL LIGHTING FIXTURES LOCATED IN CLOSETS OR STORAGE AREAS SHALL BE LOCATED A MINIMUM OF 18" FROM ALL SHELVING.
9. PROVIDE 200amp. SERVICE AND PANEL, WITH METER EQUIPMENT.
10. PROVIDE DISCONNECT SWITCH FOR AIR HANDLER IN SPACE REQUIRED.
11. PROVIDE OPTIONAL ELECTRICAL TO MASTER BATH TUB (OR AS REQUIRED) FOR WHIRLPOOL. HOOK UP PER OWNER.

ELECTRICAL LEGEND

	DUPLEX OUTLET (110V)
	SPLIT DUPL. OUTLET (110V) TOP PLUG IS HOT
	WEATHERPROOF DUPL. OUTLET (110V)
	220V OUTLET
	OUTLET @ 42" AFF.
	FLOOR OUTLET (SEE FOUNDATION PLAN FOR LOCATION)
	TELEPHONE OUTLET
	TELEVISION OUTLET
	MULTI MEDIA JACK
	SINGLE POLE SWITCH @ 48"
	SINGLE POLE SWITCH ON DIMMER @ 48"
	3-WAY SWITCH @ 48"
	DOORBELL
	DOORBELL CHIMES
	LIGHT FIXTURE
	RECESSED LIGHT FIXTURE
	OUTLET FOR WALL MOUNTED LIGHT FIXTURE
	RECESSED DIRECTIONAL LIGHT FIXTURE
	FLOURESCENT SOFFIT LIGHTING
	CEILING FAN PREWIRE
	200 AMP. PANEL BOX
	SMOKE DETECTOR
	WALL MOUNTED FLUORESCENT LIGHT
	FLUORESCENT LIGHT
	EXHAUST FAN / LIGHT FIXTURE COMBO
	EXHAUST FAN
	ELECTRICAL DISCONNECT

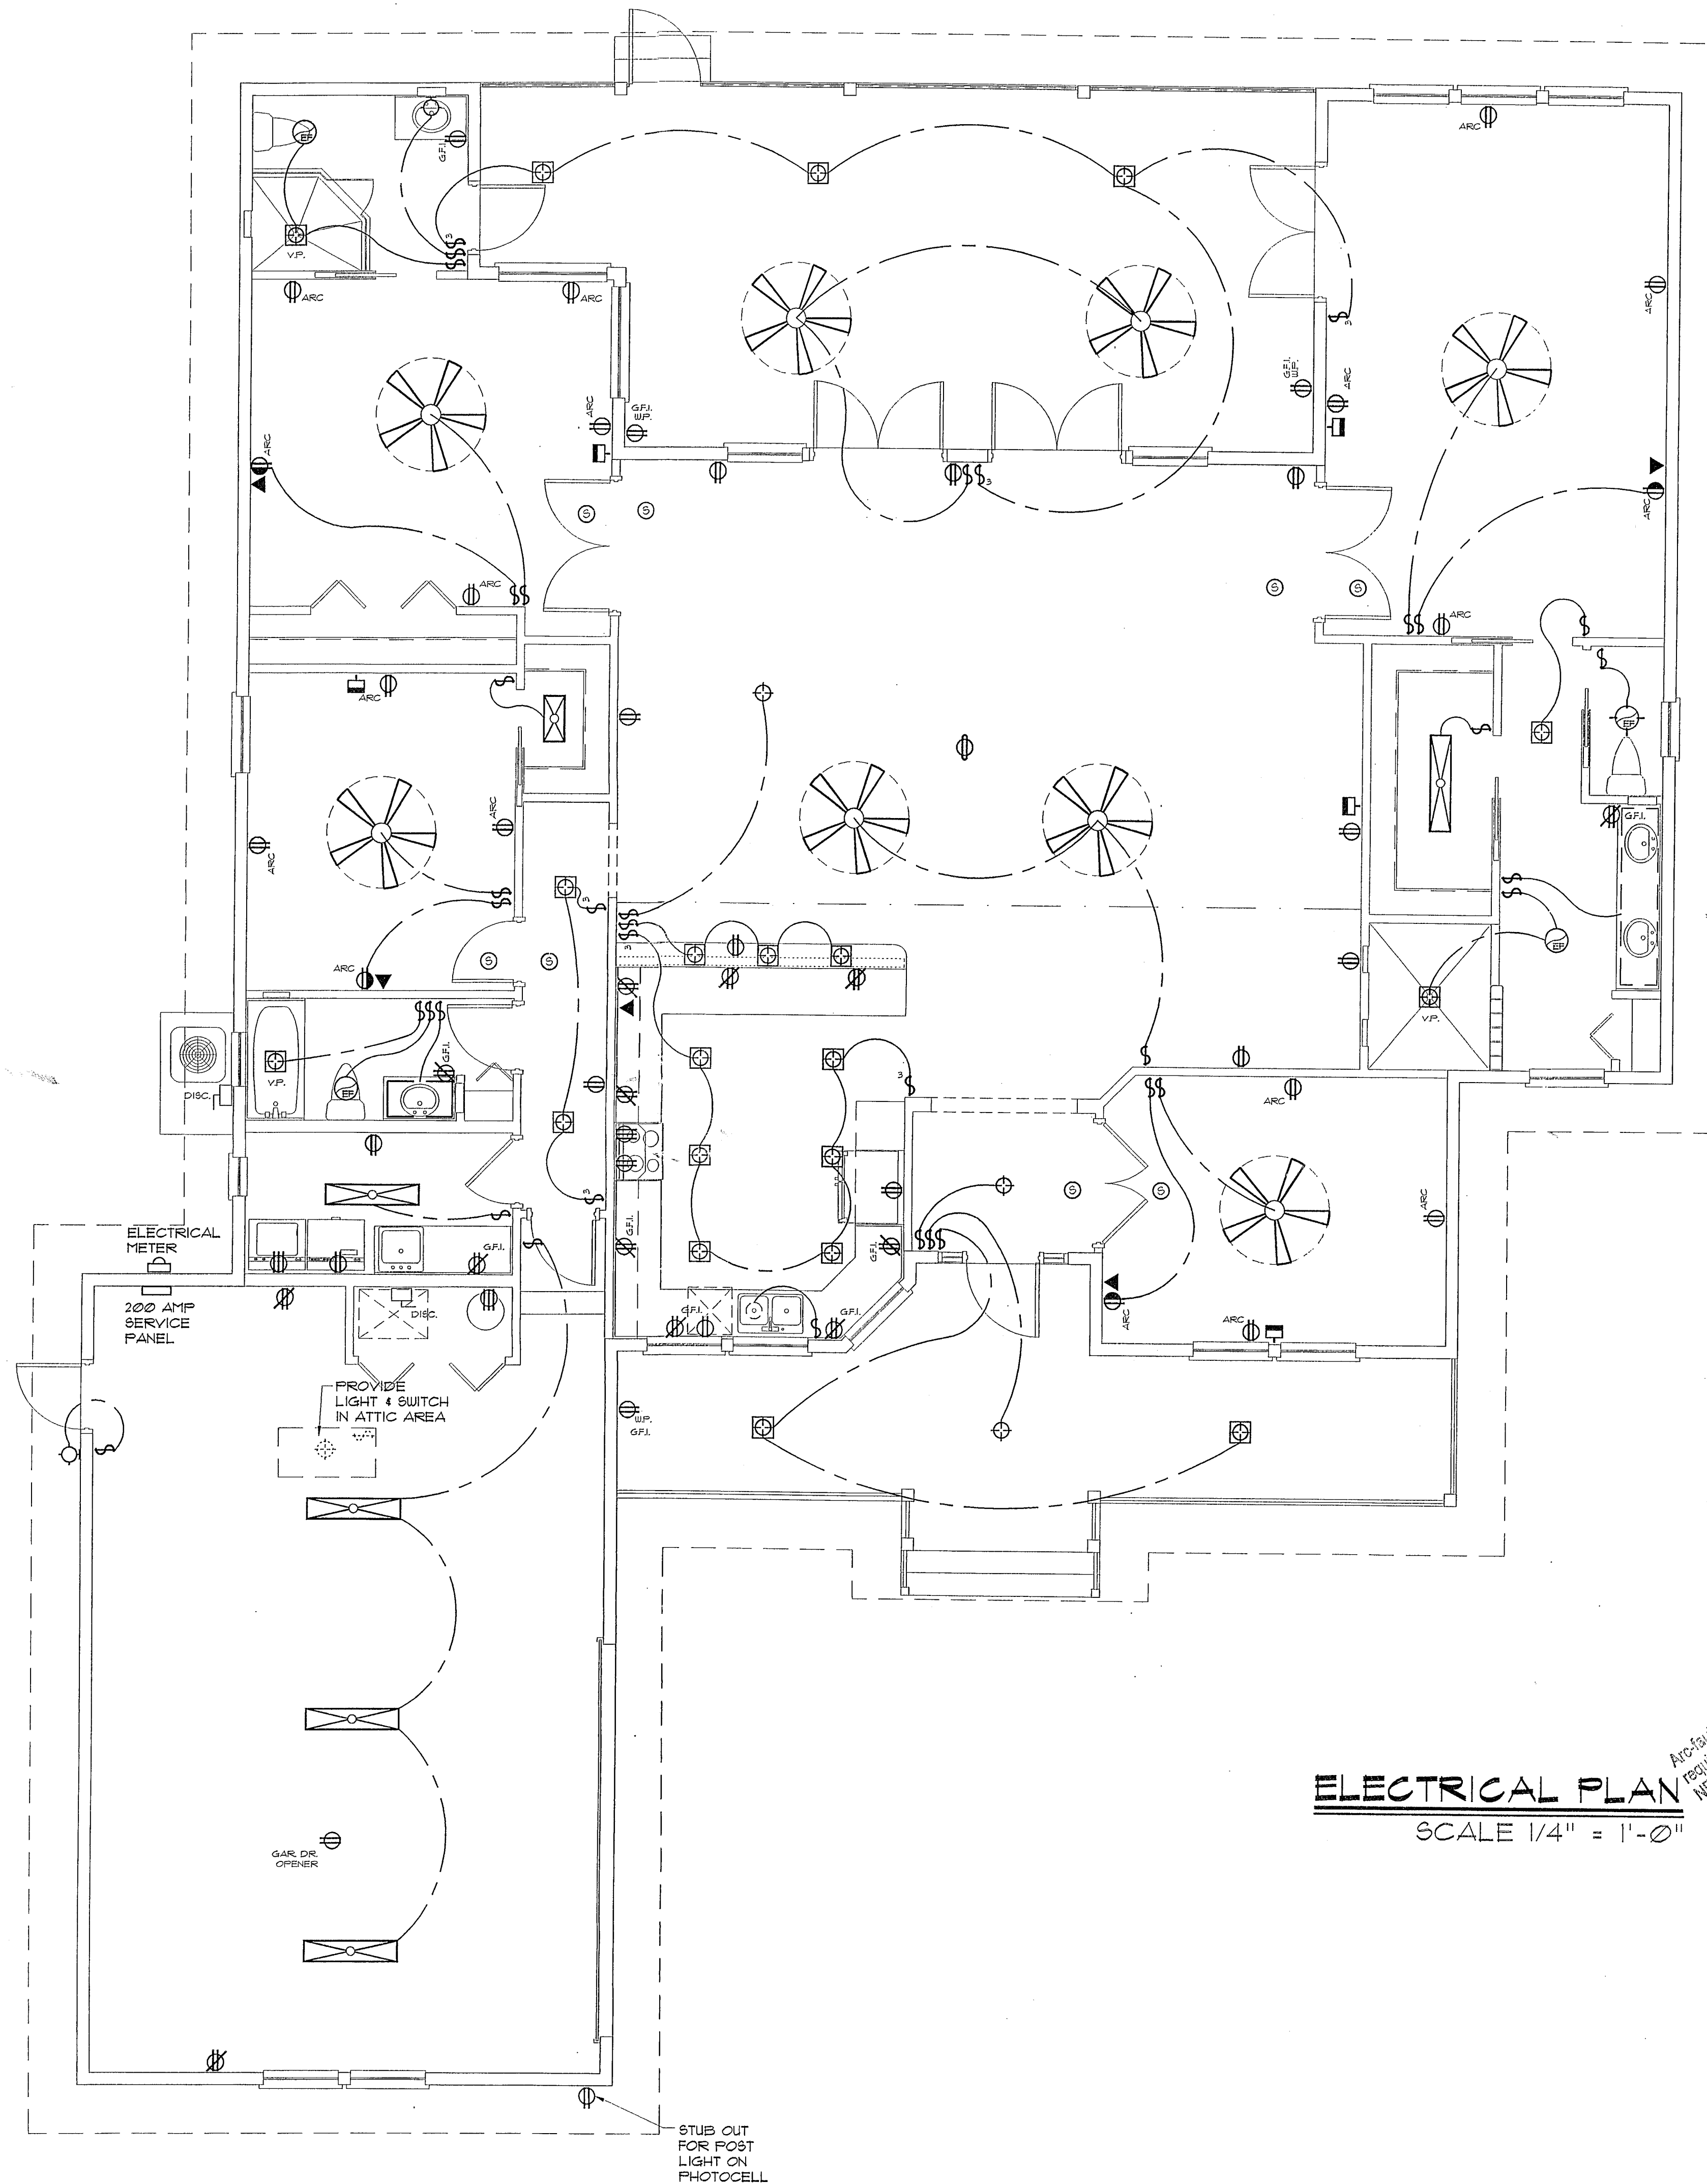

ELECTRICAL PLAN
SCALE 1/4" = 1'-0"

SMOKE DETECTORS SHALL COMPLY WITH
FBC/01 905.2, NFPA 72 CHAPTER 2


THIS BLDG / STRUCTURE HAS BEEN DESIGNED IN ACCORDANCE WITH 2001 EDITION OF THE F.L.A. BUILDING CODE FOR AN ENCLOSED STRUCTURE	
BASIC WIND SPEED	130 MPH
WIND IMPORTANCE FACTOR	1.0
BLDG CATEGORY	II
WIND EXPOSURE	B
INTERNAL PRESS. COEFF.	+/- 0.18
IMPACT PROTECTION	STORM PANELS

CEILING FANS MUST BE INSTALLED IN ALL MASTER BED ROOMS. FINAL INSPECTION REQUIRED FOR ENERGY CALCULATION CREDIT.

ARC FLASH HAZARD ANALYSIS REQUIRED IN ALL MASTER BED ROOMS
Article 250-41 Shall be Provided Prior to Floor, Foundation or Footings Inspection.

THE FOLLOWING DISCREPANCIES SHALL BE FIELD RESOLVED BY THE FIELD INSPECTOR FOR ELECTRICAL MECHANICAL PLUMBING

HARVEY STRAUSS, P.E.
FLORIDA REG. # 18799

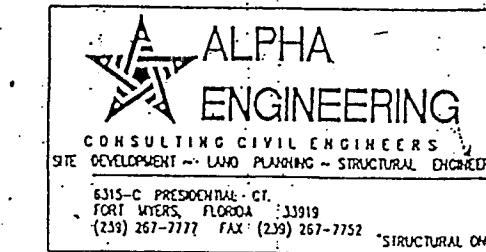


REVISION	BY
07/15/03	JDP
08/05/03	JDP
08/06/03	JDP

GET RECEPTABLES REVIEWED
NEC/99 ARTICLE 210-2

THE CHINO II MODEL
A RESIDENCE FOR MR. & MRS. FRANK ANTONOVITZ
#6656 CALICOSSA CREEK CIRCLE
FORT MYERS, FLORIDA 33908
LOT #15, CALICOSSA CREEK




Daniel Wayne Homes, Inc.
239/466-3955
Fax: 239/466-9486
E-mail: danwhomes@earthlink.net
CC0004850
12860 Banyan Creek Drive
Fort Myers, Florida 33908

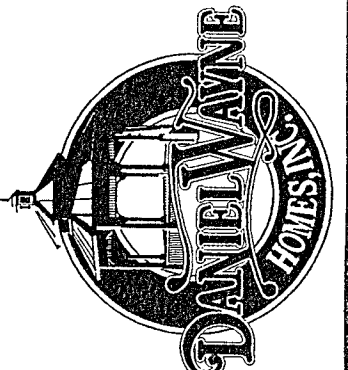

DRAWN	JDP
CHECKED	
DATE	
SCALE	
JOB NO.	
SHEET	

A-6
OF 7 SHEETS

COPYRIGHT © 2000 DANIEL WAYNE HOMES, INC. THIS DOCUMENT AND THE IDEAS AND DESIGN CONCEPTS INCORPORATED HEREIN, AS AN INSTRUMENT OF SERVICE, CAN NOT BE USED, IN WHOLE OR IN PART FOR THIS OR ANY OTHER PROJECT, WITHOUT THE WRITTEN AUTHORIZATION OF DANIEL WAYNE HOMES, INC.

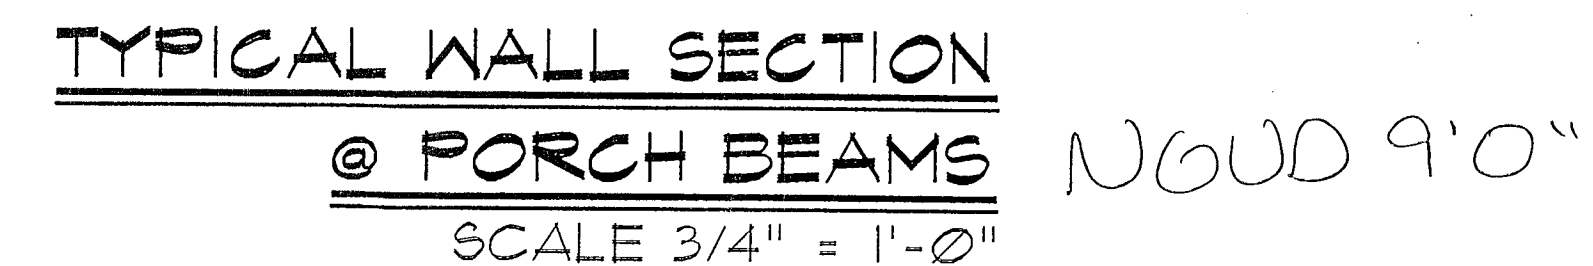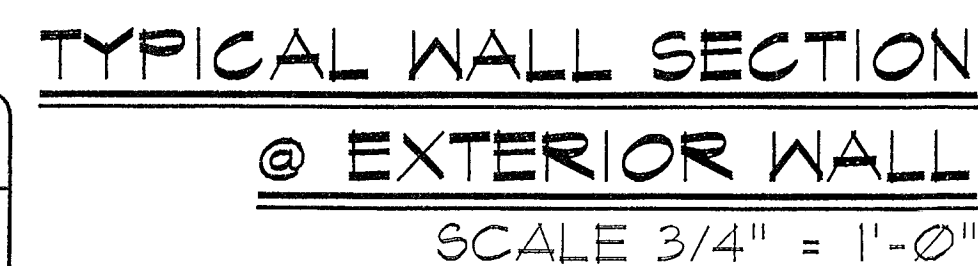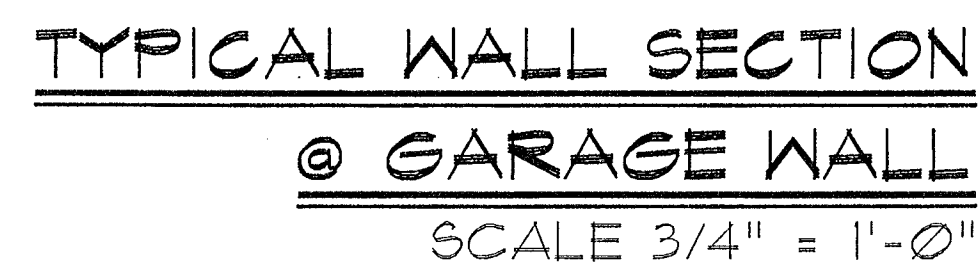

WINDOW SCHEDULE

SHUTTER SCHEDULE

EXTERIOR STAIR DETAIL
SCALE 3/4" = 1'-0"

