


Lakes Park Cisco Splice Details

Splice point B2 four fibers Splice fibers 1 & 2 of the New 12ct Blue Buffer (Blue Orange) to Existing 24 count fiber from Maint to Info booth Orange buffer pairs 1 & 2 (Blue Orange) To Maintenance building.
 Splice fibers 11 & 12 of the new 12ct Blue Buffer (Rose Aqua) to existing 24 count Fiber from Maint to Info booth Orange Buffer pairs 11 & 12 (Rose Aqua) To Maintenance building.

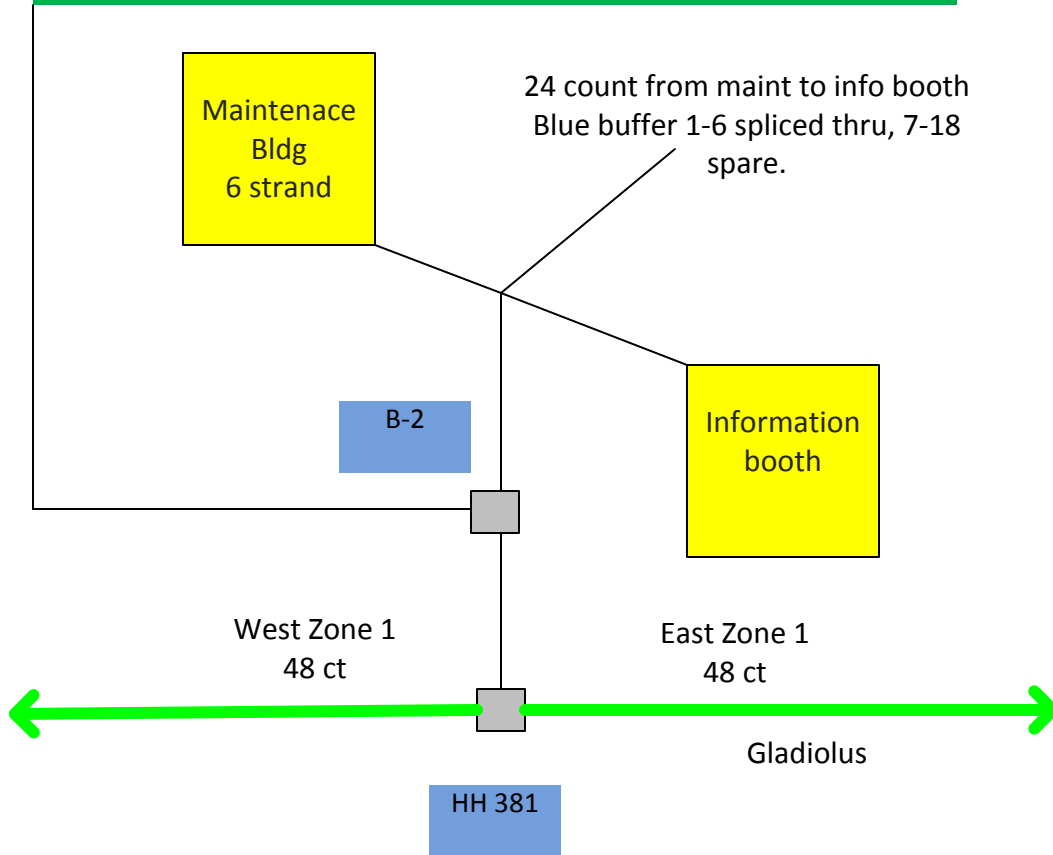

Hand Hole 381

Please splice four fibers connecting 12 ct lateral into the 48 ct zone 1 as follows:

Splice fibers 1 & 2 of the New 12 ct Blue Buffer (Blue Orange) to Existing Zone (1) 48 ct blue buffer pairs 11 & 12 (Rose Aqua) West. Splice 11 & 12 of the New 12 count Blue Buffer (Rose Aqua) to Existing Zone (1) 48 ct blue buffer pairs 11 & 12 to (Rose Aqua) to East.